11-5821-260-34P-1

TM 11–5821–260–34P–1

TECHNICAL MANUAL

DIRECT SUPPORT AND GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LISTS (INCLUDING DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS) FOR RADIO SET AN/ARC–115A(V)1 (NSN 5821–01–057–4037)

HEADQUARTERS, DEPARTMENT OF THE ARMY

10 MARCH 1980

D 101.11:

READEX FICHE best copy available

TECHNICAL MANUAL
No. 11-5821-260-34P-1

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, DC, *10 March 1980*

DIRECT SUPPORT AND GENERAL SUPPORT MAINTENANCE

REPAIR PARTS AND SPECIAL TOOLS LISTS

(INCLUDING DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS)

FOR

RADIO SET AN/ARC-115A(V)1
(NSN 5821-01-057-4037)

Current as of 2 October 1979

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS

You can help improve this manual. If you find any mistakes or if you know of a way to improve the procedures, please let us know.

Mail your letter, DA Form 2028 (Recommended Changes to Publications and Blank Forms), or DA Form 2028-2 located in back of this manual direct to: Commander, US Army Communications and Electronics Materiel Readiness Command, ATTN: DRSEL-ME-MQ, Fort Monmouth, New Jersey 07703.

In any case, a reply will be furnished direct to you.

TABLE OF CONTENTS

			Page	Illus Figure
SECTION	I.	Introduction	1	
	II.	Repair Parts List	5	
GROUP	00	Radio Set AN/ARC-115(V)1	5	1
	01	Panel Assembly, Radio Set	9	2
	02	Frequency Selector Assembly	13	3
		0201 Tuning Matrix "C/D" Deck Assembly	17	4
		0202 Tuning Matrix "A" Deck Assembly	19	5
		0203 Tuning Matrix "B" Deck Assembly	21	6
	03	Amplifier Synthesizer Assembly	23	7
		0301 Phase Locked RF Generator	27	8
		0302 Dividers 10 MC Osc	33	9
		0303 VCO and D-A Converter Assembly	39	10
		0304 Transmit Audio and Comparater Assembly	43	11

*This manual supersedes TM 11-5821-260-34P-1, 23 June 1978.

			Page	Illus Figure
GROUP		0805 Guard IF Amplifier	47	12
		0806 Guard 2nd IF Detector and AGC Amplifier	49	13
		0807 Guard Squelch Circuit	53	14
		0808 Audio Amplifier Assembly	57	15
		0809 Main Squelch Circuit (no parts authorized)		
		0810 Main 2nd IF Detector and AGC Amplifier (no parts authorized)		
		0811 Main IF Amplifier	61	16
		0812 Chassis and Cable Assembly	67	17
	04	Main RF Amplifier Mixer Assembly	71	18
		0401 Main Receiver, RF Amplifier and Mixer	75	19
		0402 Guard RF Amplifier and Mixer Assembly	79	20
		0403 Noise Generator	83	21
		0404 Guard Receiver Osc Assembly	87	22
	05	RF Coupler and Filter Assembly	89	23
		0501 T/R Relay (no parts authorized)	91	24
		0502 Low Pass Filter Circuit Card	93	25
		0503 RF Coupler Circuit Card	97	26
	06	Power Supply	101	27
	07	Surge Protector Transistor	101	27
	08	+9V Regulator Transistor	103	28
	09	Circuit Card Modulator	107	29
	10	Power Amplifier Exciter Assembly	111	30
		1001 Exciter	115	31
		1002 Power Amplifier		
SECTION	III.	Special Tools List (not applicable)	116	
	IV.	National Stock Number and Part Number Index		

SECTION I
INTRODUCTION

1. Scope

This manual lists spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE), and other special support equipment required for performance of direct support and general support maintenance of the AN/ARC-115A(V)1. It authorizes the requisitioning and issue of spares and repair parts as indicated by the source and maintenance codes.

2. General

This Repair Parts and Special Tools List is divided into the following sections:

a. Section II. Repair Parts Lists. A list of spares and repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in numeric sequence, with the parts in each group listed in figure and item number sequence.

b. Section III. Special Tools List. Not applicable.

c. Section IV. National Stock Number and Part Number Index. A list, in National item identification number (NIIN) sequence, of all National stock numbers (NSN) appearing in the listings, followed by a list, in alphameric sequence, of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance.

3. Explanation of Columns

a. Illustration. This column is divided as follows:

(1) *Figure number.* Indicates the figure number of the illustration on which the item is shown.

(2) *Item number.* The number used to identify item called out in the illustration.

b. Source, Maintenance, and Recoverability (SMR) Codes.

(1) *Source code.* Source codes indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows:

Code — *Definition*

PA—Item procured and stocked for anticipated or known usage.

KF—An item of a maintenance kit and not purchased separately. Maintenance kit defined as a kit that provides an item that can be replaced at organizational or intermediate levels of maintenance.

AH—Item to be assembled at general support maintenance level.

XA—Item is not procured or stocked because the requirements for the item will result in the replacement of the next higher assembly.

XD—A support item that is not stocked. When required, item will be procured through normal supply channels.

NOTE

Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA and aircraft support items as restricted by AR 700-42.

(2) *Maintenance code.* Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code format as follows:

(a) The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace, and use the support item. The maintenance code entered in the third position will indicate one of the following levels of maintenance:

Code — *Application/Explanation*

0—Support item is removed, replaced, used at the organizational level.

F—Support item is removed, replaced, used at the direct support level.

H—Support item is removed, replaced, used at the general support level.

D—Support items that are removed, replaced, used at depot, mobile depot, specialized repair activity only.

(*b*) The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). This position will contain one of the following maintenance codes:

Code	*Application/Explanation*
H	The lowest maintenance level capable of complete repair of the support item is the general support level.
D	The lowest maintenance level capable of complete repair of the support item is the depot level.
Z	Nonreparable. No repair is authorized.

(3) *Recoverability code.* Recoverability codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code format as follows:

Recoverability codes	*Definition*
Z	Nonreparable item. When unserviceable, condemn and dispose at the level indicated in position 3.
D	Reparable item. When beyond lower level repair capability, return to depot. Condemnation and disposal not authorized below depot level.
L	Reparable item. Repair, condemnation, and disposal not authorized below depot/specialized repair activity level.
A	Item requires special handling or condemnation procedures because of specific reasons (i.e., precious metal content, high dollar value, critical material or hazardous material). Refer to appropriate manuals /directives for specific instructions.

c. National Stock Number. Indicates the National stock number assigned to the item and will be used for requisitioning purposes.

d. Part Number. Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

NOTE

When a stock numbered item is requisitioned, the repair part received may have a different part number than the part being replaced.

e. Federal Supply Code for Manufacturer (FSCM). The FSCM is a 5-digit numeric code listed in SB 708-42 which is used to identify the manufacturer, distributor, or Government agency, etc.

f. Description. Indicates the Federal item name and, if required, a minimum description to identify the item. Items that are included in kits and sets are listed below the name of the kit or set with the quantity of each item in the kit or set indicated in the quantity incorporated in unit column.

g. Unit of Measure (U/M). Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned.

h. Quantity Incorporated in Unit. Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly.

4. Special Information

a. Detailed assembly instructions for items source coded to be assembled are found in TM 11-5821-260-34-1 (to be published). Assembly components are listed immediately following the item to be assembled.

b. The following publications pertain to the AN/ARC-115A(V)1 and its components:

(1) TM 11-5821-260-12-1, Radio Set AN/ARC-115A(V)1.

(2) TM 11-5821-260-20P-1, Radio Set AN/ARC-115A(V)1.

(3) TM 11-5821-260-34-1, Radio Set AN/ARC-115A(V)1 (to be published).

c. National stock numbers (NSN's) that are missing from P source coded items have been applied for and will be added to this TM by future change/revision when they are entered in the Army Master Data File (AMDF). Until the NSN's are established and published, submit exception requisitions to: Commander, US Army Communications and Electronics Materiel Readiness Command, ATTN: DRSEL-MM, Fort Monmouth, NJ 07703 for the part required to support your equipment.

5. How to Locate Repair Parts

a. When Naticnal stock number or part number is unknown.

(1) *First.* Using the table of contents, determine the functional group within which the item belongs. This is necessary since illustrations are prepared for functional groups and listings are divided into the same groups.

(2) *Second.* Find the illustration covering the functional group to which the item belongs.

(3) *Third.* Identify the item on the illustration and note the illustration figure and item number of the item.

(4) *Fourth.* Using the Repair Parts Listing, find the figure and item number noted on the illustration.

b. When National stock number or part number is known.

(1) *First.* Using the Index of National Stock Numbers and Part Numbers, find the pertinent National stock number or part number. This index is in NIIN sequence followed by a list of part numbers in alphameric sequence, cross-referenced to the illustration figure number and item number.

(2) *Second.* After finding the figure and item number, locate the figure and item number in the repair parts list.

6. Abbreviations

Not applicable.

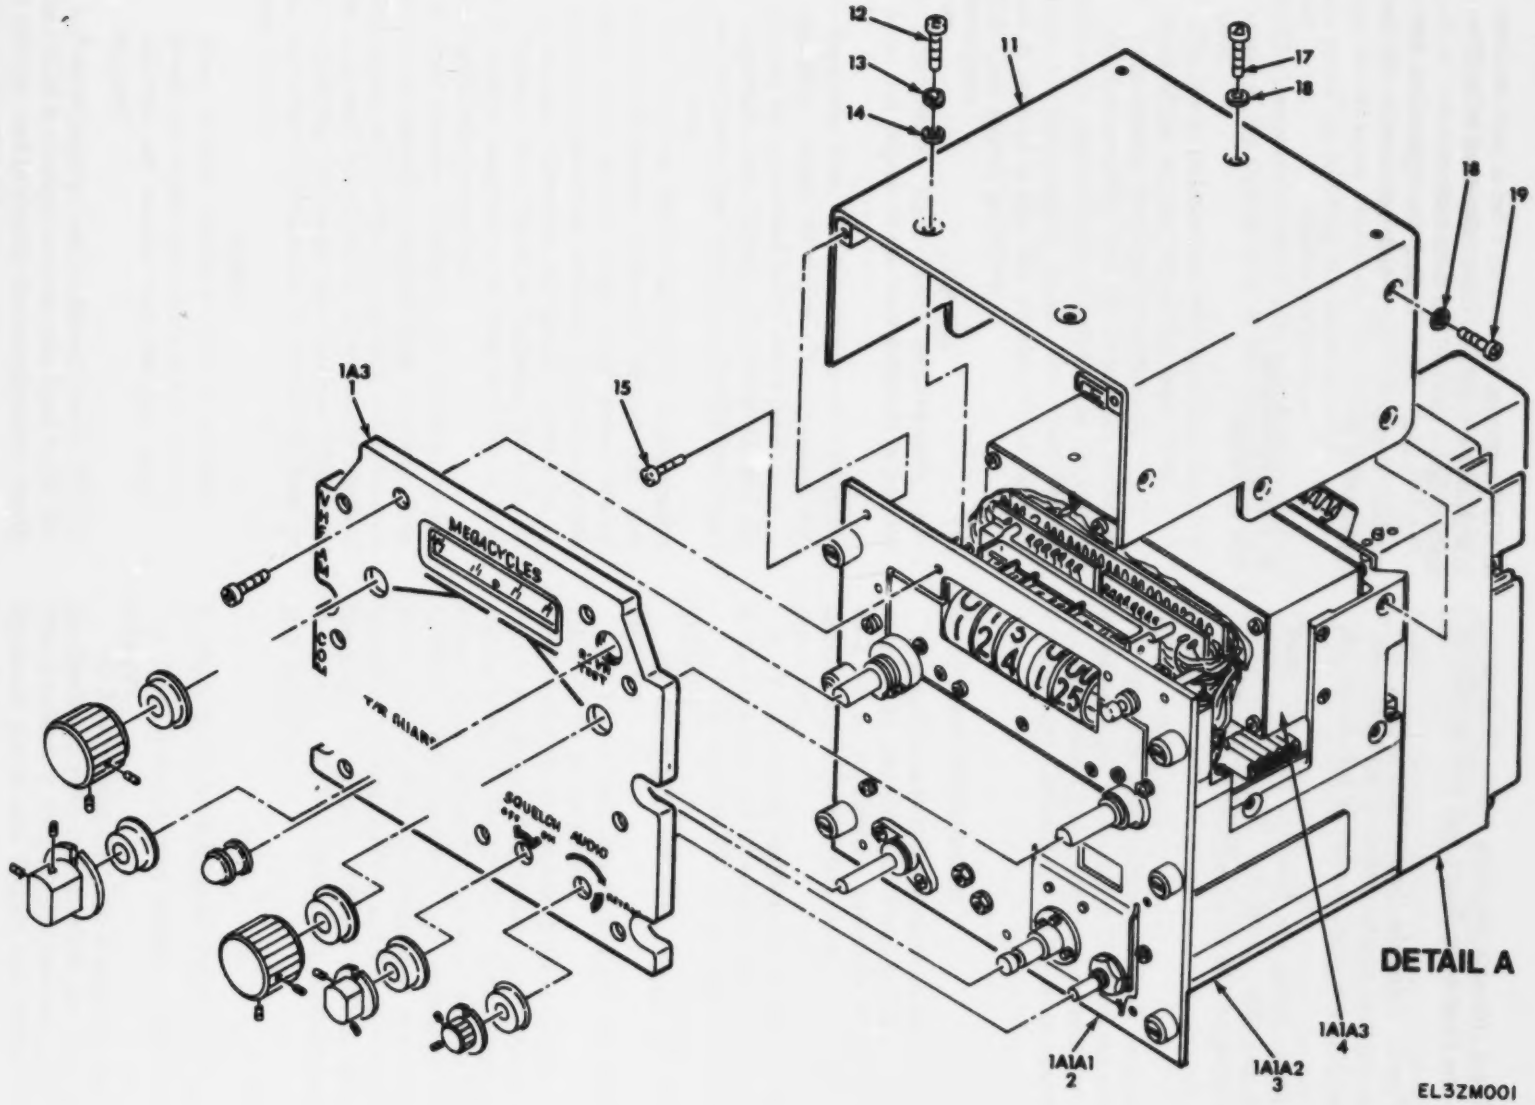

Figure 1. Radio Set AN/ARC-115A(V)1 (Sheet 1 of 3)

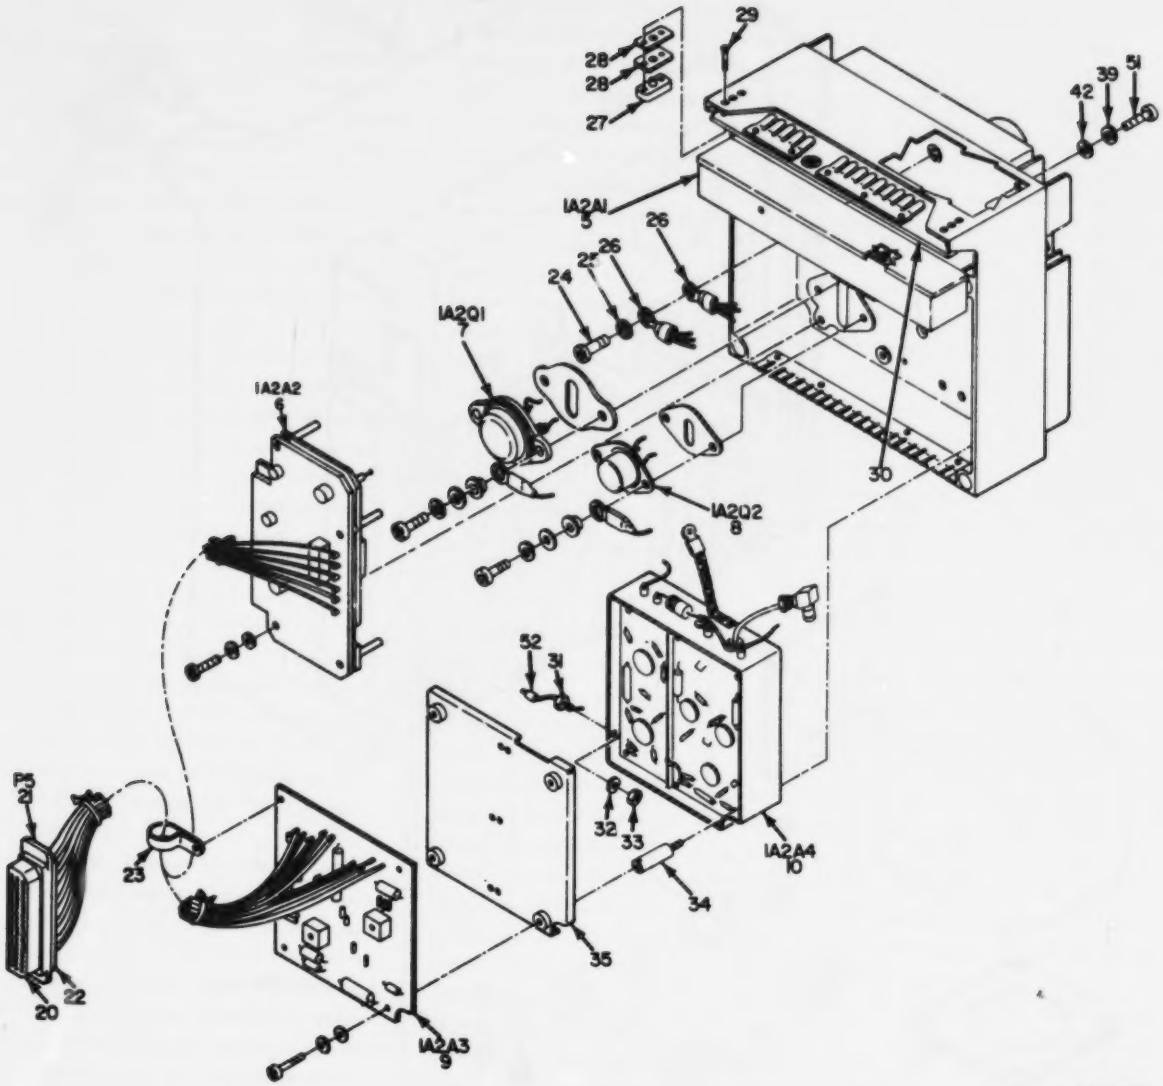

Figure 1. Radio Set AN/ARC-115A(V)1 (Sheet 2 of 3)

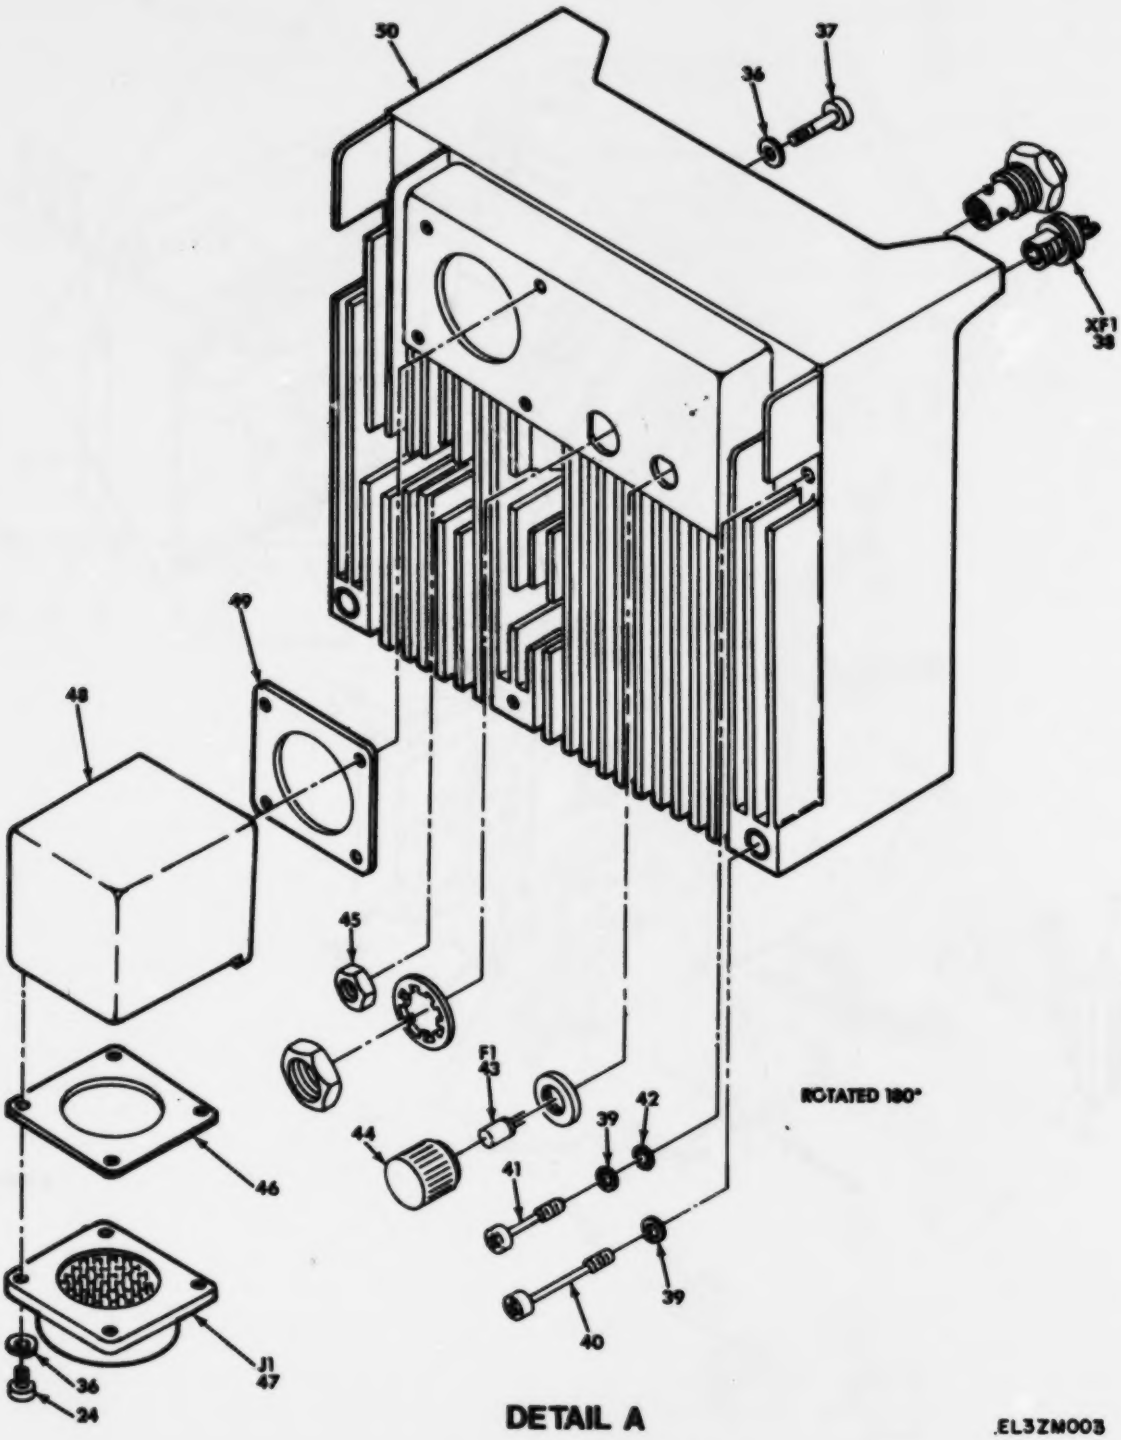

Figure 1. Radio Set AN/ARC-115A(V)1 (Sheet 3 of 3)

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 00 RADIO SET AN/ARC-113A(V)1		
1	1	XAUDD		SM8882580	80063	PNL ASSY RAD SETL	EA	1
1	2	PAMHD	5821-01-077-8332	SM-B-882571	80063	FREQ SEL ASSY	EA	1
1	3	XAUDD		SM8693160	80063	AMP SYNTH ASSYL	EA	1
1	4	PAMHD	5821-00-724-1686	SM8882640	80063	AMPLIFIER-MIXER	EA	1
1	5	XDHHD	5841-01-057-6266	SM8693245	80063	COUPLER-FILTER ASSE	EA	1
1	6	PADDL		SM-B-882666	80063	POWER SUPPLY	EA	1
1	7	PAMZZ	5961-00-136-4162	JAN2N3792	81349	TRANSISTOR	EA	2
1	8	PAMZZ	5961-00-127-9362	2N4912	04713	TRANSISTOR	EA	1
1	9	PAMDL	5821-01-084-7218	SM8605936	80063	CIRCUIT CARD ASSEMB	EA	1
1	10	PAMHD	5821-01-058-0959	SM8693147	80063	EXCITER-POWER AMPLI	EA	1
1	11	XDFZZ		SM8618208	80063	COVER ASSY ELECL	EA	1
1	12	PAFZZ	5305-00-439-2737	MS51957-128	96906	SCREW,MACHINE	EA	1
1	13	XDFZZ		SMC617837-5	80063	WASHER,FLAT	EA	2
1	14	PAMZZ	5310-00-933-8118	MS35338-135	96906	WASHER,LOCK	EA	2
1	15	PAMZZ	5305-00-404-2668	MS51957-28B	96906	SCREW,MACHINE	EA	2
1	17	PAFZZ	5305-01-077-6281	SM-B-882572-2	80063	SCREW,MACHINE	EA	2
1	18	PAFZZ	5310-00-126-0014	SMC617837-8	80063	WASHER,FLAT	EA	1
1	19	PAFZZ	5305-01-077-6282	SM-B-882572-3	80063	SCREW,MACHINE	EA	9
1	20	PAMZA	5999-00-497-9274	220-845-02	02660	CONTACT,ELECTRICAL	EA	8
1	21	PAMZZ	5935-00-443-8557	223-697	02660	CONNECTOR,ELECTRICA	EA	36
1	22	PAMZZ	5821-00-168-3621	SMC632342	80063	SUPPORT	EA	1
1	23	PAMZZ	5340-00-468-1084	3-16JNA	95987	CLAMP,LOOP	EA	1
1	24	PAMZZ	5305-00-054-5648	MS51957-14	96906	SCREW,MACHINE	EA	1
1	25	PAMZZ	5310-00-550-3715	MS35333-70	96906	WASHER,LOCK	EA	5
1	26	PAMZZ	5940-00-050-2308	MS35431-3	96906	TERMINAL,LUG	EA	1
1	27	PAMZZ	5315-00-168-7329	SMC618423-2	80063	PIN,STRAIGHT,HEADED	EA	2
1	28	PAMZZ	5365-00-182-4640	SM8618840	80063	SHIM,COVER	EA	2
1	29	PAMZZ	5305-00-764-2964	MS51959-4	96906	SCREW,MACHINE	EA	4
1	30	PAMZZ	5821-00-168-7745	SM8692772	80063	PLATE,ELECTAICAL CO	EA	4
1	31	XDDZZ		SM8618442	80063	BUSHING,GROUNDING	EA	1
1	32	PAMZZ	5310-00-929-6395	MS35338-136	96906	WASHER,LOCK	EA	2
1	33	PAMZZ	5310-01-077-8489	SM-B-882652	80063	NUT,PLAIN,HEXAGO	EA	3
1	34	PAMZZ	5340-00-182-9709	SMC906013-10	80063	POST,ELECTRICAL-MEC	EA	2
1	35	ADDZZ		SM8632242	80063	COVER ELEC EQPTL	EA	4
1	36	PAMZZ	5310-00-933-8118	MS35338-135	96906	WASHER,LOCK	EA	1
1	37	XDHZZ	5305-00-054-5647	MS51957-13	96906	SCREW,MACHINE	EA	8
1	38	PAMZZ	5970-00-140-7792	4B4002LESSCAP	75915	FUSEHOLDER,EXTRACTO	EA	4
1	40	PAFZZ	5305-00-410-6549	SMC692567	80063	SCREW,EXTERNALLY RE	EA	1
1	41	PAMZZ	5305-00-143-1869	SMC597739	80063	SCREW,EXTERNALLY RE	EA	2
							EA	2

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
1	42	PAHZZ	5310-00-722-5998	MS15795-805	96906	WASHER,FLAT	EA	4
1	43	PAOZZ	5920-00-903-1098	273005	75915	FUSE,CARTRIDGE	EA	1
1	44	PAOZZ	5920-00-110-7800	282001-2	75915	COVER,FUSE	EA	1
1	45	PAHZZ	5310-00-837-1381	MS6710C8	80205	NUT,PLAIN,HEXAGON	EA	5
1	46	PAHZZ	5330-00-150-9433	SMC692614	80063	GASKET	EA	1
1	47	PAHZZ	5935-00-223-2833	21-249218-32P	77820	CONNECTOR,RECEPTACL	EA	1
1	48	PAHZZ	5975-00-177-2133	SMC632311	80063	JUNCTION BOX	EA	1
1	49	XDHZZ		SMC692615	80063	GASKET,ADAPTER,RF	EA	1
1	50	XAHZZ		SME692575	80063	CHASSIS,ELECTRICAL	EA	1
1	51	PAHZZ	5305-00-448-6547	MS51957-278	96906	SCREW,MACHINE	EA	2
1	52	PAHZZ	5995-00-056-8850	SMA597837-1	80063	CABLE ASSEMBLY,RADI	EA	1

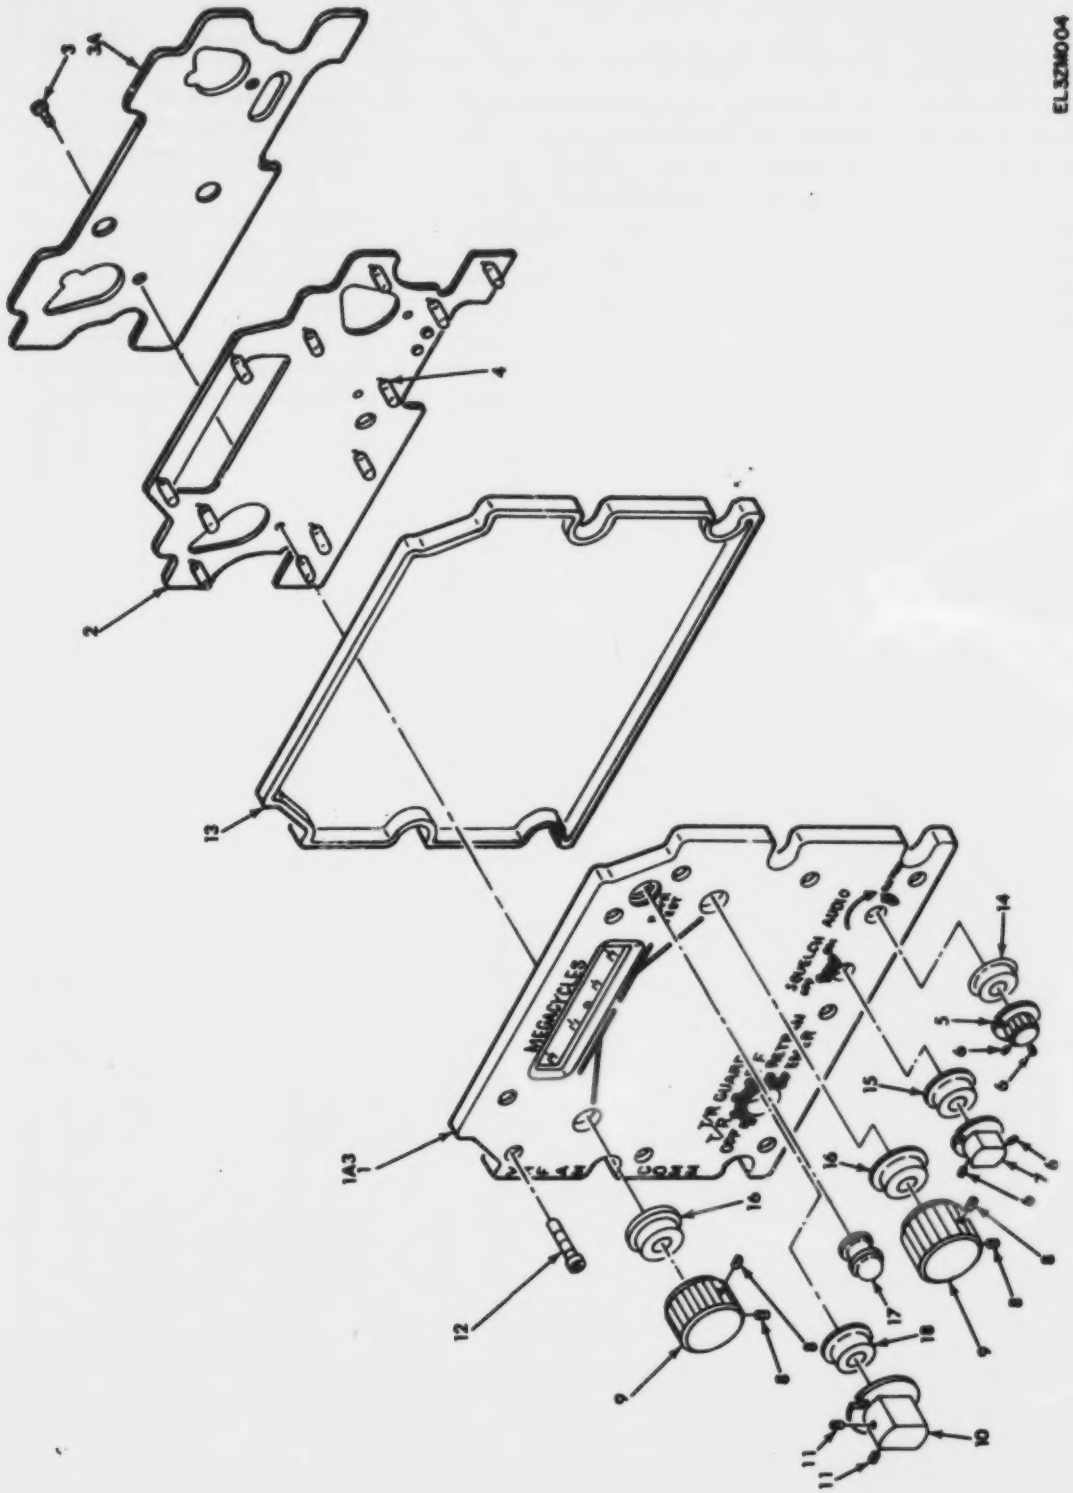

Figure 2. Panel Assembly, Radio Set AN/ARC-115A(V)1

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 01 PANEL ASSEMBLY,RADIO SET		
2	1	ADHZZ		SMD882587	80063	PANEL,RADIO SET	EA	1
2	2	XUHZZ		SMD882588	80063	LIGHT PANEL	EA	1
2	3	PAHZZ	5305-00-964-7369	MAS662C2R2	80205	SCREW,MACHINE	EA	2
2	3A	XBHDD		SMD882656	80063	BUFFER,PAD	EA	1
2	4	XUHZZ		CM7152A515	71744	LAMP	EA	12
2	5	PAOZZ		SMC658199	80063	KNOB,AUDIO CONTROL	EA	1
2	6	PAOZZ	5305-00-717-6950	MS51963-9	96906	SETSCREW	EA	2
2	7	PAOZZ		SMC693149	80063	KNOB,CONTROL BAR	EA	1
2	8	PAOZZ	5305-00-719-5349	MS51963-37	96906	SETSCREW	EA	2
2	9	PAOZZ		SMC882585	80063	KNOB,FREQUENCY	EA	2
2	10	PAOZZ	5305-00-880-5546	SMD5959?9-3	80063	KNOB	EA	1
2	11	PAOZZ	5305-00-719-5342	MS51963-34	96906	SETSCREW	EA	2
2	12	PAOZZ	5305-00-949-0493	MS3212-17	96906	SCREW,MACHINE	EA	9
2	13	KFFZZ		SMD882589	80063	GASKET,PANEL,RADIO (PART OF KIT 70485, MFR CODE 83777)	EA	1
4	14	KFFZZ		SMC882584	80063	SEAL,PLAIN,AUDIO (PART OF KIT 70485, MFR CODE 83777)	EA	1
2	15	KFFZZ		SMC726679	80063	SEAL,PLAIN,SQUELCH (PART OF KIT 70485, MFR CODE 83777)	EA	1
2	16	KFFZZ		SMC882583	80063	SEAL,PLAI (PART OF KIT 70485, MFR CODE 83777)	EA	2
4	17	KFFZZ		SMC882582	80063	BOOT,DUST AND (PART OF KIT 70485, MFR CODE 83777)	EA	1
2	18	KFFZZ		SMC726675	80063	SEAL,PLAIN,FUNCTION (PART OF KIT 70485, MFR CODE 83777)	EA	1
2		PAFZZ		70485	83777	KIT,SPARE PARTS SEALING FOR AN/ARC-115A(V)1	EA	1
2	13					GASKET,PANEL	EA	1
2	14					SEAL,PLAIN,AUDIO CONTROL	EA	1
2	15					SEAL,PLAIN,SQUELCH CONTROL	EA	1
2	16					SEAL,PLAIN,FREQUENCY CONTROL	EA	2
2	17					BOOT,DUST,MOISTURE CONTROL	EA	1
2	18					SEAL,PLAIN,FUNCTION SWITCH	EA	1

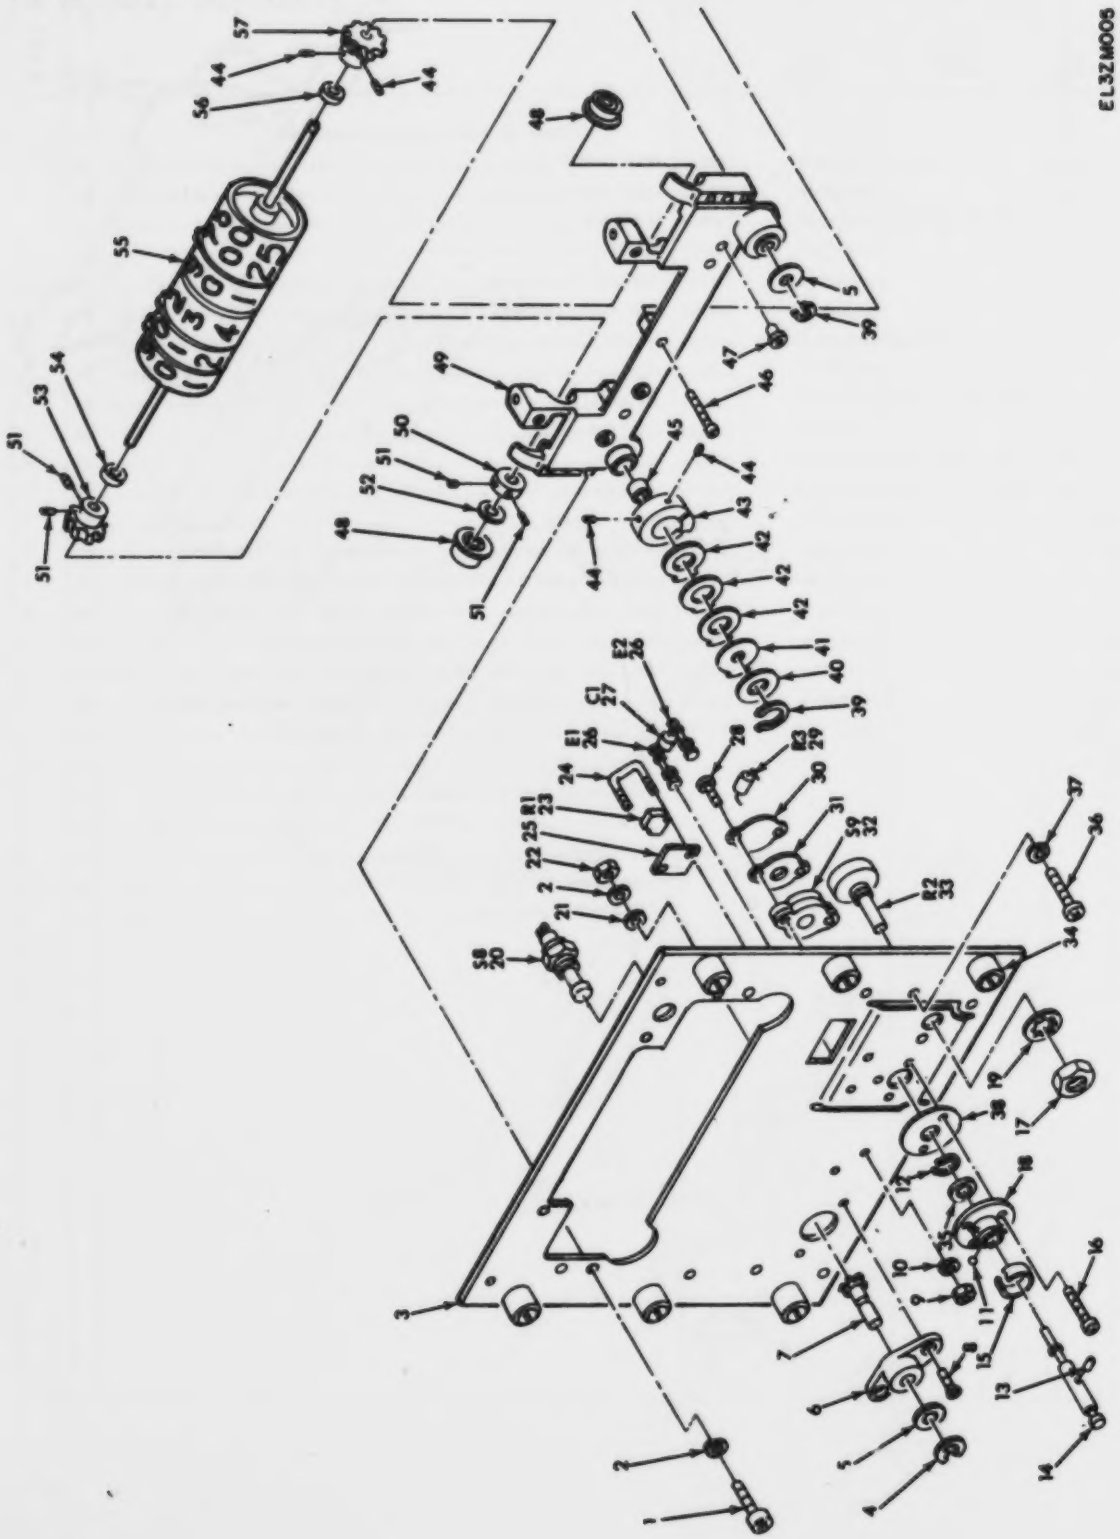

Figure 3. Frequency Selector Assembly (Sheet 1 of 3)

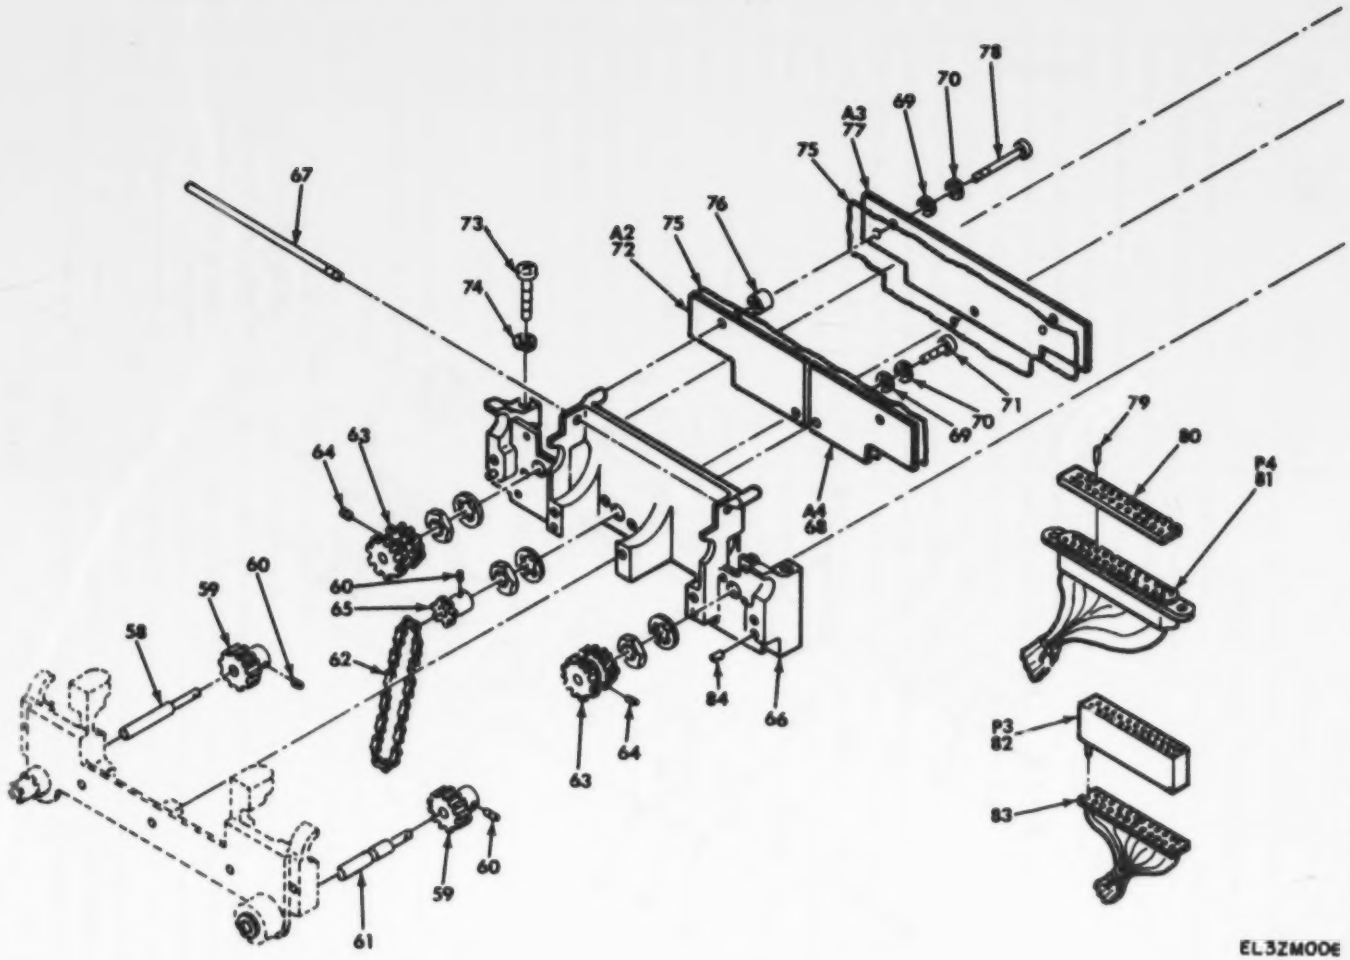

Figure 3. Frequency Selector Assembly (Sheet 2 of 3)

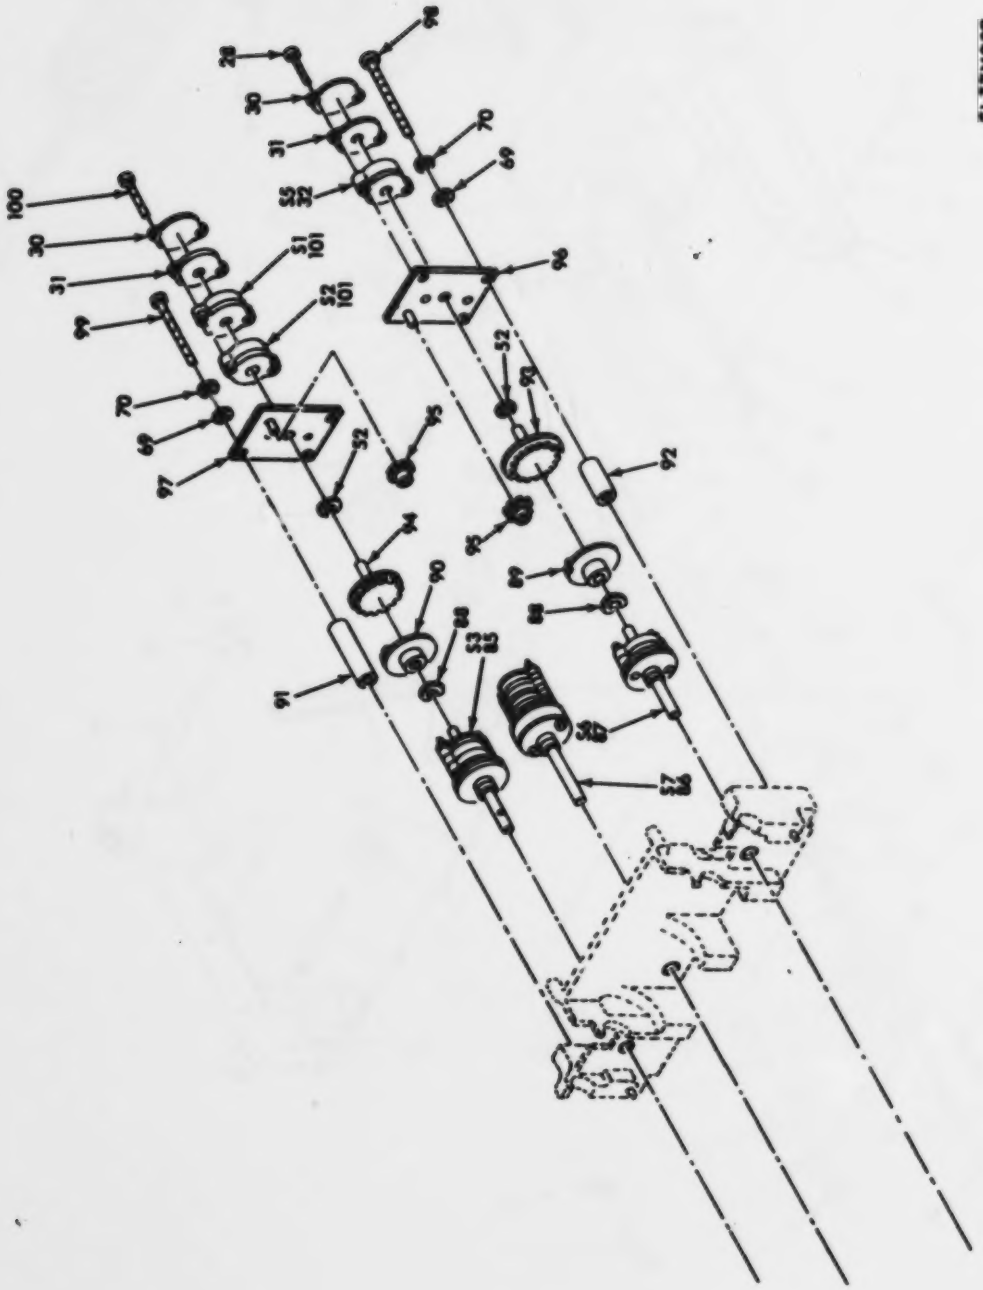

Figure 3. Frequency Selector Assembly (Sheet 3 of 3)

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 02 FREQUENCY SELECTOR ASSEMBLY		
3	1	PAHZZ	5305-00-054-5647	MS51957-13	96906	SCREW,MACHINE	EA	2
3	2	PAHZZ	5310-00-933-8118	MS35338-135	96906	WASHER,LOCK	EA	4
3	3	XADZZ		SMB693151-1	80063	PANEL,BLANK	EA	1
3	4	PAHZZ	5365-00-598-1493	MS16632-4018	96906	RING,RETAINING	EA	1
3	5	XDHZZ		SMC617837-1	80063	WASHER,FLAT	EA	2
3	6	PAHZZ	5821-00-091-9160	SMB618398	80063	SUPPORT,SWITCH ASSE	EA	1
3	7	PAHZZ	5985-00-110-9288	SR-B-618008	80063	SHAFT ASSEMBLY,ANTE	EA	1
3	8	PAHZZ	5305-00-770-2579	MS51959-15	96906	SCREW,MACHINE	EA	2
3	9	PAHZZ	5310-00-939-0676	NAS671C0	80205	NUT,PLAIN,HEXAGON	EA	2
3	10	PAHZZ	5310-00-676-8061	NAS1640-0	80205	WASHER,LOCK	EA	2
3	11	PAHZZ	3110-00-183-7537	MS19060-17	96906	BALL,BEARING	EA	2
3	12	PAHZZ	5365-00-432-3584	MS16624-5018-1	96906	RING,RETAINING	EA	1
3	13	PAHZZ	5315-00-865-9667	MS16562-1	96906	PIN,SPRING	EA	1
3	14	XAHZZ		SMC692966-1	80063	SHAFT	EA	1
3	15	XAHZZ		SMB693146	80063	RING,RETAINING	EA	1
3	16	PAHZZ	5305-00-054-5635	MS51957-1	96906	SCREW,MACHINE	EA	2
3	17	PAHZZ	5310-00-113-3871	SMB617939-3	80063	NUT,HEXAGON	EA	1
3	18	XAHZZ		SMC692965	80063	HOUSING,DETENT	EA	1
3	19	PAHZZ	5310-00-113-8412	SMB595971-1	80063	WASHER,LOCK	EA	1
3	20	PAHZZ	5930-00-059-2856	30YY2069	81073	SWITCH,PUSH	EA	1
3	21	PAHZZ	5310-00-595-6211	MS15795-803	96906	WASHER,FLAT	EA	2
3	22	PAHZZ	5310-00-934-9768	MS35649-244	96906	NUT,PLAIN,HEXAGON	EA	2
3	23	PAHZZ	5905-00-328-1335	RTR24DL502R	81349	RESISTOR,VARIABLE,W	EA	1
3	24	XDHZZ		SMB658197	80063	CLAMP	EA	1
3	25	XDHZZ		SMB658198	80063	PAD	EA	1
3	26	XDHZZ		013-2041	98291	TERMINAL,STUD	EA	2
3	27	PAHZZ	5910-00-460-0850	CSR13G105KM	81349	CAPACITOR	EA	1
3	28	PAHZZ	5305-00-057-3800	NAS1635-00-6	80205	SCREW,MACHINE	EA	4
3	29	PAHZZ		RLR05C680JM	81349	RESISTOR,FIXED,FILM	EA	1
3	30	XDHZZ		8J1141	81073	PLATE,SWITCH	EA	3
3	31	XDHZZ		SMC597677	80063	INSULATOR,SWITCH	EA	3
3	32	PAHZZ	5930-00-116-2767	8YY33181-1	81073	SWITCH,ROTARY	EA	2
3	33	PAHZZ	5905-00-146-4440	SMA597813-5	80063	RESISTOR,VARIABLE,N	EA	1
3	34	PAHZZ	5325-00-171-4938	PFSC3-1-2-38	72794	STUD ASSEMBLY,TURNL	EA	6
3	35	XAHZZ		SMC618053-4	80063	SHIM,WASHER	EA	1
3	36	PAHZZ	5305-00-054-6650	MS51957-26	96906	SCREW,MACHINE	EA	2
3	37	PAHZZ	5310-00-929-6395	MS35338-136	96906	WASHER,LOCK	EA	2
3	38	XDHZZ		SMB693141	80063	INSULATOR,SWITCH	EA	1
3	39	PAHZZ	5365-00-720-8064	MS16624-1825	96906	RING,RETAINING	EA	2

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
3	40	XBHZZ		SMC618053-1	80063	SHIM	EA	4
3	41	XAHZZ		SMC618048-3	80063	WASHER,TURN	EA	1
3	42	XAHZZ		SMC618048-1	80063	WASHER,TURNS	EA	3
3	43	PAHZZ	5340-00-151-7836	SMC618089	80063	COLLAR,STOP	EA	1
3	44	PAHZZ	5305-00-717-6950	MS51963-9	96906	SETSCREW	EA	4
3	45	XBBZZ		SMB618080-4	80063	BEARING	EA	1
3	46	PAHZZ	5305-00-068-9414	MS16995-11	96906	SCREW,CAP,SOCKET HE	EA	5
3	47	PABZZ	5340-00-988-9520	N11240-50	73937	INSERT,SCREW THREAD	EA	2
3	48	PAHZZ	3120-00-116-1474	SMC618064	80063	BEARING,SLEEVE	EA	2
3	49	XAHZZ		SMB618080-1	80063	FRAME,REAR	EA	1
3	50	XBHZZ		SMB692935	80063	COLLAR,SHAFT	EA	1
3	51	PAHZZ	5305-00-717-6955	MS51963-1	96906	SETSCREW	EA	4
3	52	XBHZZ		SMC596378-2	80063	WASHER,FLAT	EA	4
3	53	XAHZZ		SMD617888-2	80063	GEAR,HELICAL	EA	1
3	54	XBHZZ		SMC618066-3	80063	BEARING,SLEEVE	EA	1
3	55	PAHZZ	4680-00-130-6914	SMD595976-2	80063	COUNTER,ROTATING	EA	1
3	56	XBHZZ		SMC618066-2	80063	BEARING,SLEEVE	EA	1
3	57	XAHZZ		SMD617888-1	80063	GEAR,HELICAL	EA	1
3	58	XAHZZ		SMC682576	80063	SHAFT,KNOB,LEFT	EA	1
3	59	XAHZZ		SMC618550	80063	GEAR,SPUR	EA	1
3	60	PAHZZ	5315-01-077-8491	SM-B-595940-2	80063	PIN,LOCK,EXPANSION	EA	1
3	61	XAHZZ		SMC618549	80063	EXTENSION SHAFT	EA	1
3	62	AHHZZ		9000-40C	92114	CHAIN,DRIVE	EA	1
3	63	XAHZZ		SMD618082	80063	GEAR,CLUSTER	EA	2
3	64	PAHZZ	5315-00-619-3999	MS51923-167	96906	PIN,SPRING	EA	2
3	65	PAHZZ	3020-00-106-9893	SMC618063	80063	SPROCKET WHEEL	EA	1
3	66	XAHZZ		SMB618080-2	80063	FRAME,FRONT	EA	1
3	67	XBHZZ		SMC617832-2	80063	ADD,COUNTER,STOP	EA	1
3	68	PAHDL	5821-00-091-9165	SMB618122	80063	CIRCUIT CARD ASSEMB	EA	1
3	69	XBHZZ		SMC617837-3	80063	WASHER,FLAT	EA	10
3	70	PAHZZ	5310-00-928-2690	MS35338-134	96906	WASHER,LOCK	EA	10
3	71	PAHZZ	5305-00-054-5637	MS51957-3	96906	SCREW,MACHINE	EA	1
3	72	PAHDL	5821-00-091-9167	SMB618116	80063	CIRCUIT CARD ASSEMB	EA	1
3	73	PAHZZ	5305-00-054-5656	MS51957-22	96906	SCREW,MACHINE	EA	2
3	74	PAHZZ	5310-00-933-8118	MS35338-135	96906	WASHER,LOCK	EA	2
3	75	XBHZZ		SMB692971	80063	INSULATOR,MATRIX	EA	2
3	76	XBBZZ		SMC596095-12	80063	SPACER,SLEEVE	EA	3
3	77	PAHDL	5821-01-057-6411	SMB605978	80063	CIRCUIT CARD ASSEMB	EA	1
3	78	PABZZ	5305-01-077-8515	SM-B-682571-5	80063	SCREW,MACHIN	EA	3
3	79	PAHZA	5999-00-497-9274	220-845-02	02660	CONTACT,ELECTRICAL	EA	53

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
3	80	PAHZZ	5935-00-168-4418	SMC632343	80063	SUPPORT,CONNECTOR	EA	1
3	81	PAHZZ	5935-00-134-5337	223-1233	02660	CONNECTOR BODY,RECE	EA	1
3	82	PAHZZ	5935-00-115-8514	223-1133	02660	CONNECTOR BODY,RECE	EA	1
3	83	PAHZZ	5821-00-168-3626	SMC632344	80063	SUPPORT,CONNECTOR	EA	1
3	84	PADZZ	5315-00-807-7684	MS16555-403	96906	PIN,STRAIGHT,HEADLE	EA	1
3	85	PAHZZ	5930-00-115-8522	8YY33182	81073	SWITCH,ROTARY	EA	2
3	86	PAHZZ	5930-01-060-4636	8YY33400	81073	SWITCH,ROTARY	EA	1
3	87	PAHZZ	5930-00-115-8523	8YY34014	81073	SWITCH,ROTARY	EA	1
3	88	XDHZZ		SMB597932-4	80063	WASHER,SPRIN	EA	1
3	89	PAHZZ	5930-00-520-5179	SMD618087	80063	SWITCH,ELECTRICAL	EA	2
3	90	PAHZZ	5821-01-077-8333	SM-D-618086	80063	DRIVER,A SWITCH	EA	1
3	91	XDHZZ		SMC617878-3	80063	SPACER,TUBULA	EA	1
3	92	XDHZZ		SMC617878-2	80063	SPACER,SLEEVE	EA	3
3	93	XAHZZ		SMD617842-1	80063	GEAR SHAF	EA	3
3	94	XAHZZ		SMD617842-2	80063	GEARSHAFT,SPUR	EA	1
3	95	PAHZZ	3020-00-704-9698	8Y2218	18911	GEAR,SPUR	EA	1
3	96	XAHZZ		SMB617883	80063	PL SWPC*NTGL	EA	2
3	97	XAHZZ		SMB618392	80063	PL SWITCH NTGL	EA	1
3	98	PAHZZ	5305-00-927-2062	MS1635-02-16	80205	SCREW,MACHINE	EA	1
3	99	PAHZZ	5305-00-812-6079	MS1635-02-20	80205	SCREW,MACHINE	EA	3
3	100	PAHZZ	5305-00-012-0719	MS1635-00-8	80205	SCREW,MACHINE	EA	3
3	101	PAHZZ	5930-00-116-2768	8YY33181-2	81073	SWITCH,ROTARY	EA	2

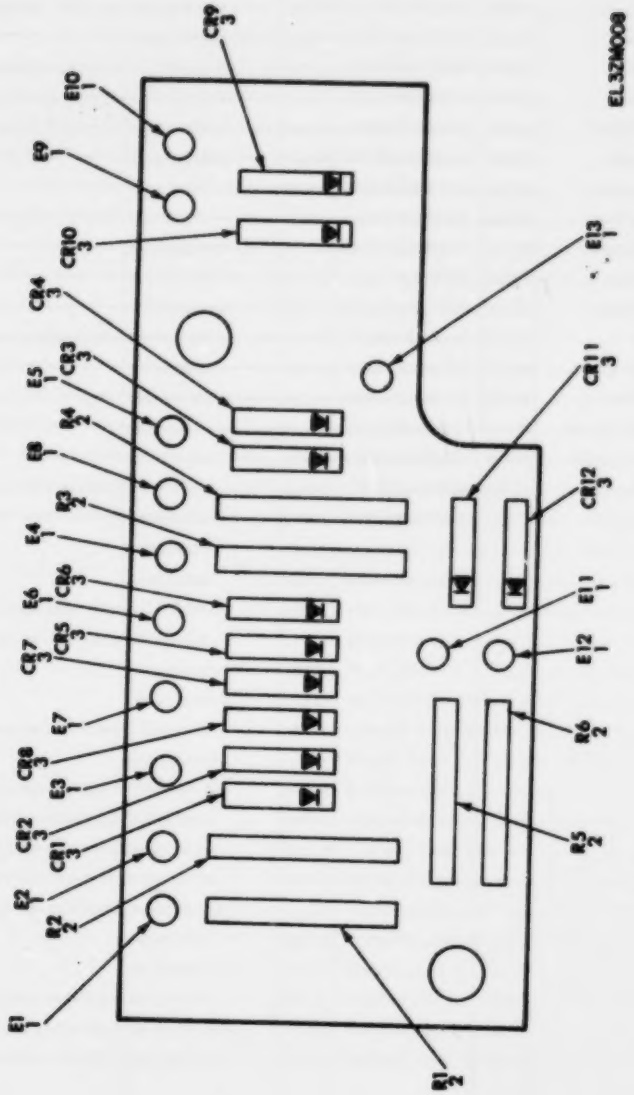

Figure 4. Tuning Matrix "C/D" Deck Assembly

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0201 TUNING MATRIX "C/D" DECK ASSEMB		
						LV		
4	1	PAOZZ	5940-00-411-8492	203184	88245	TERMINAL,STUD	EA	12
4	2	PAOZZ	5905-00-616-8554	RC07GF103K	81349	RESISTOR,FIXED,COMP	EA	6
4	3	PAOZZ	5961-00-421-8882	JAN1N4531	81349	SEMICONDUCTOR DEVIC	EA	12

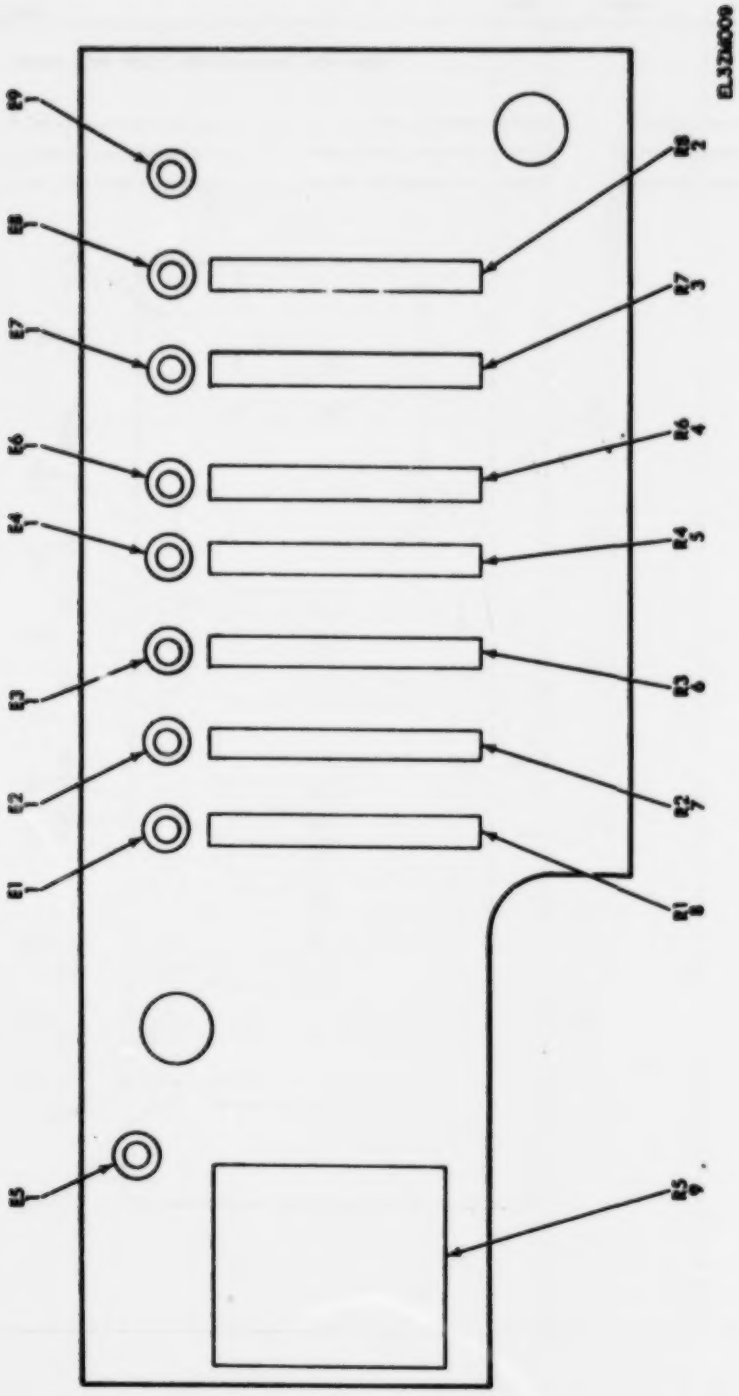

Figure 5. Tuning Matrix "A" Deck Assembly

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0202 TUNING MATRIX "A" DECK ASSEMBLY		
5	1	PAOZZ	5940-00-411-8492	203184	88245	TERMINAL,STUD	EA	9
5	2	PAOZZ	5905-00-233-4532	RNC55H2261FS	81349	RESISTOR,FIXED,FILM (SELECT-AT-TEST)	EA	1
5	3	PAOZZ	5905-00-982-0196	RN55C5621F	81349	RESISTOR,FIXED,FILM (SELECT-AT-TEST)	EA	1
5	4	PAOZZ	5905-00-972-3596	RN55C9311F	81349	RESISTOR,FIXED,FILM (SELECT-AT-TEST)	EA	1
5	5	PAOZZ	5905-00-975-1656	RN55C2801F	81349	RESISTOR,FIXED,FILM (SELECT-AT-TEST)	EA	1
5	6	PAOZZ	5905-00-902-0343	RN55C2991F	81349	RESISTOR,FIXED,FILM (SELECT-AT-TEST)	EA	1
5	7	PAOZZ	5905-00-410-1577	RNC55H2211FS	81349	RESISTOR,FIXED,FILM (SELECT-AT-TEST)	EA	1
5	8	PAOZZ	5905-00-774-8323	RZ2684-01-0071	81349	RESISTOR,FIXED,FILM (SELECT-AT-TEST)	EA	1
5	9	PAOZZ	5905-00-891-7249	310-1K	84048	RESISTOR,FIXED,FILM	EA	4
						RESISTOR,VARIABLE,W	EA	1

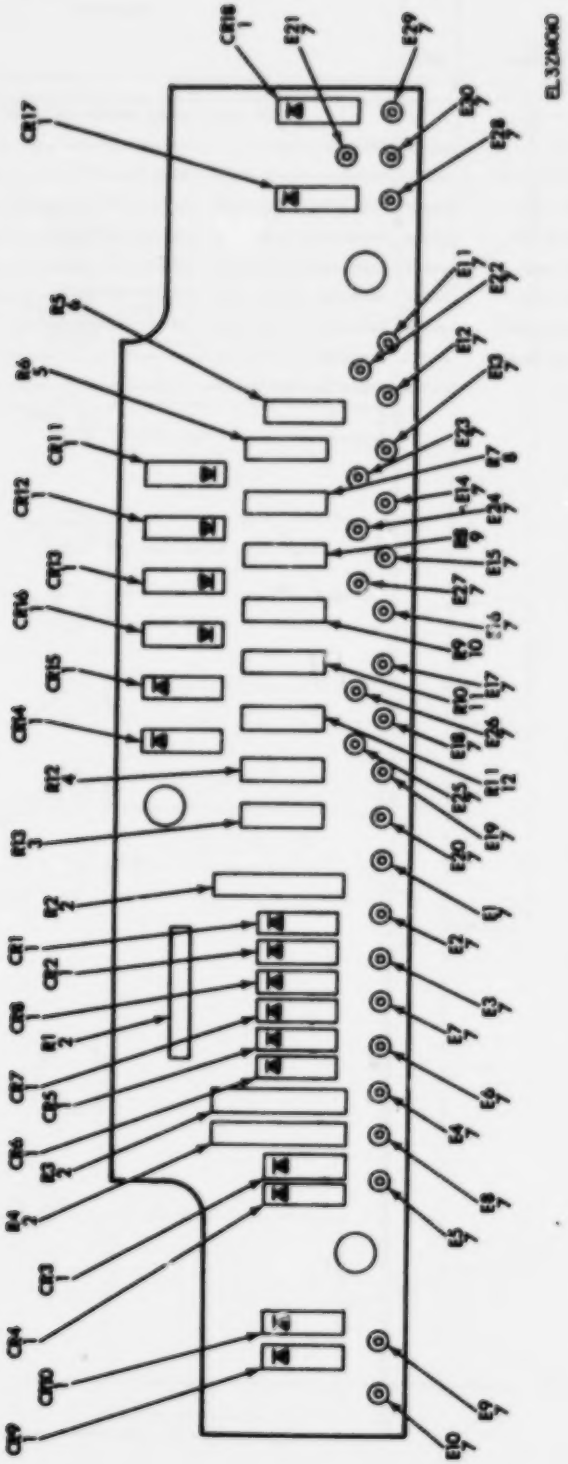

Figure 6. Tuning Matrix "B" Deck Assembly

(1) ILLUSTRATION FIG NO.	(1) ILLUSTRATION ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0203 TUNING MATRIX "B" DECK ASSEMBLY		
6	1	PAZZZ	5961-00-421-0882	JAN1N4531	01349	SEMICONDUCTOR DEVIC	EA	10
6	2	XAOOO		RC07GF103A	01349	RESISTOR,FIXED,COMP	EA	4
6	3	PAZZZ		RN50C1870F	01349	RESISTOR,FIXED,FILM	EA	1
6	4	XAOOO		RNC50H1780FS	01349	RESISTOR,FIXED,FILM	EA	1
6	5	PAZZZ	5905-00-286-5352	RNC50H1470FS	01349	RESISTOR,FIXED,FILM	EA	1
6	6	PAZZZ		RN50C1430F	01349	RESISTOR,FIXED,FILM	EA	1
6	7	PAZZZ	5940-00-411-0492	203184	88245	TERMINAL,STUD	EA	30
6	8	PAZZZ		RN50C1540F	01349	RESISTOR,FIXED,FILM	EA	1
6	9	PAZZZ		RN50C1580F	01349	RESISTOR,FIXED,FILM	EA	1
6	10	PAZZZ	5905-00-303-9048	RNC50H1620FS	01349	RESISTOR,FIXED,FILM	EA	1
6	11	PAZZZ		RN50C1690F	01349	RESISTOR,FIXED,FILM	EA	1
6	12	PAZZZ		RN50C1740F	01349	RESISTOR,FIXED,FILM	EA	1

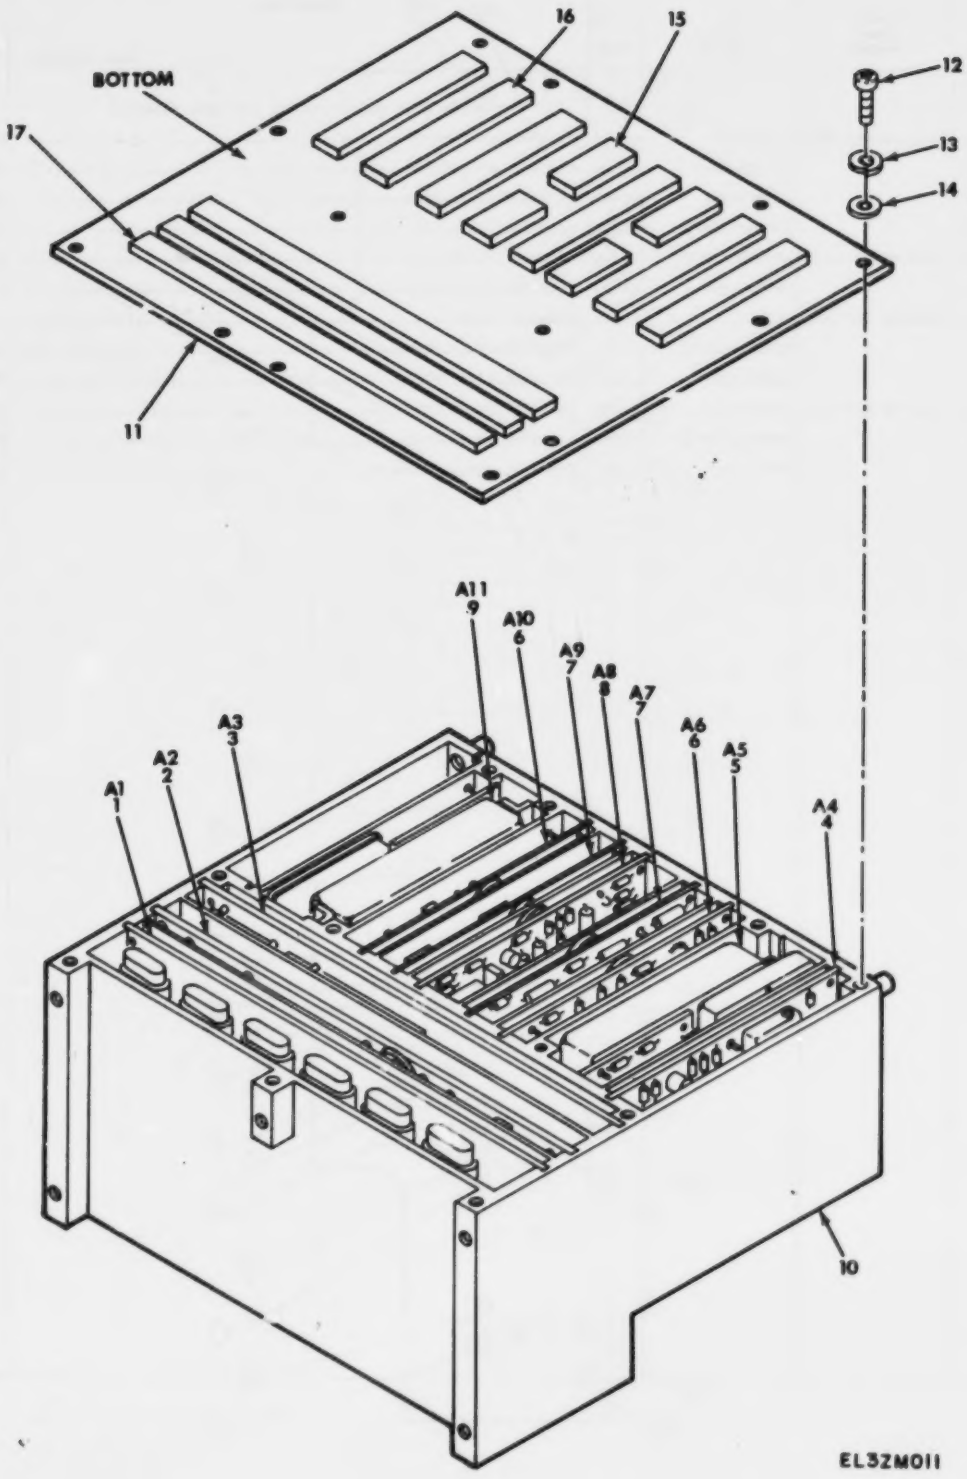

Figure 7. Amplifier Synthesizer Assembly

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 03 AMPLIFIER SYNTHESIZER ASSEMBLY		
7	1	PAFDL	5821-01-057-6412	SMB605913	80063	CIRCUIT CARD ASSEMB	EA	1
7	2	PAFDL	5821-00-142-5949	SMB693079	80063	CIRCUIT CARD ASSEMB	EA	1
7	3	PAFDL	5821-00-142-5946	SMB693081	80063	CIRCUIT CARD ASSEMB	EA	1
7	4	PAFDL	5821-01-057-6415	SMB698115	80063	CIRCUIT CARD ASSEMB	EA	1
7	5	PAFDL	5821-00-724-1707	SMB596347	80063	CIRCUIT CARD ASSEMB	EA	1
7	6	PAFDL	5821-00-177-2907	SMB692882	80063	CIRCUIT CARD ASSEMB	EA	2
7	7	PAFDL	5821-01-077-8599	SM-B-882659	80063	CIRCUIT CARD ASSEMB	EA	1
7	8	PAFDL	5821-01-057-6413	SMB605972	80063	CIRCUIT CARD ASSEMB	EA	1
7	9	PAFDL	5821-01-057-6416	SMB698109	80063	CIRCUIT CARD ASSEMB	EA	1
7	10	XADDL		SMB693162	80063	CHAS & CA ASSY	EA	1
7	11	XDHZZ	5821-01-060-6694	SME693167	80063	COVER,BOTTOM ASSEMB	EA	1
7	12	PAHZZ	5305-00-054-5637	MS51957-3	96906	SCREW,MACHINE	EA	11
7	13	PAHZZ	5310-00-928-2690	MS35338-134	96906	WASHER,LOCK	EA	11
7	14	PAHZZ	5310-00-595-6761	MS15795-802	96906	WASHER,FLAT	EA	11
7	15	XDHZZ		SMC658216-5	80063	PAD,CUSHIONING	EA	4
7	16	XAHZZ		SMC658216-1	80063	PAD,CUSHIONING	EA	6
7	17	XAHZZ		SMC658216-4	80063	PAD,CUSHIONING	EA	3

FRONT

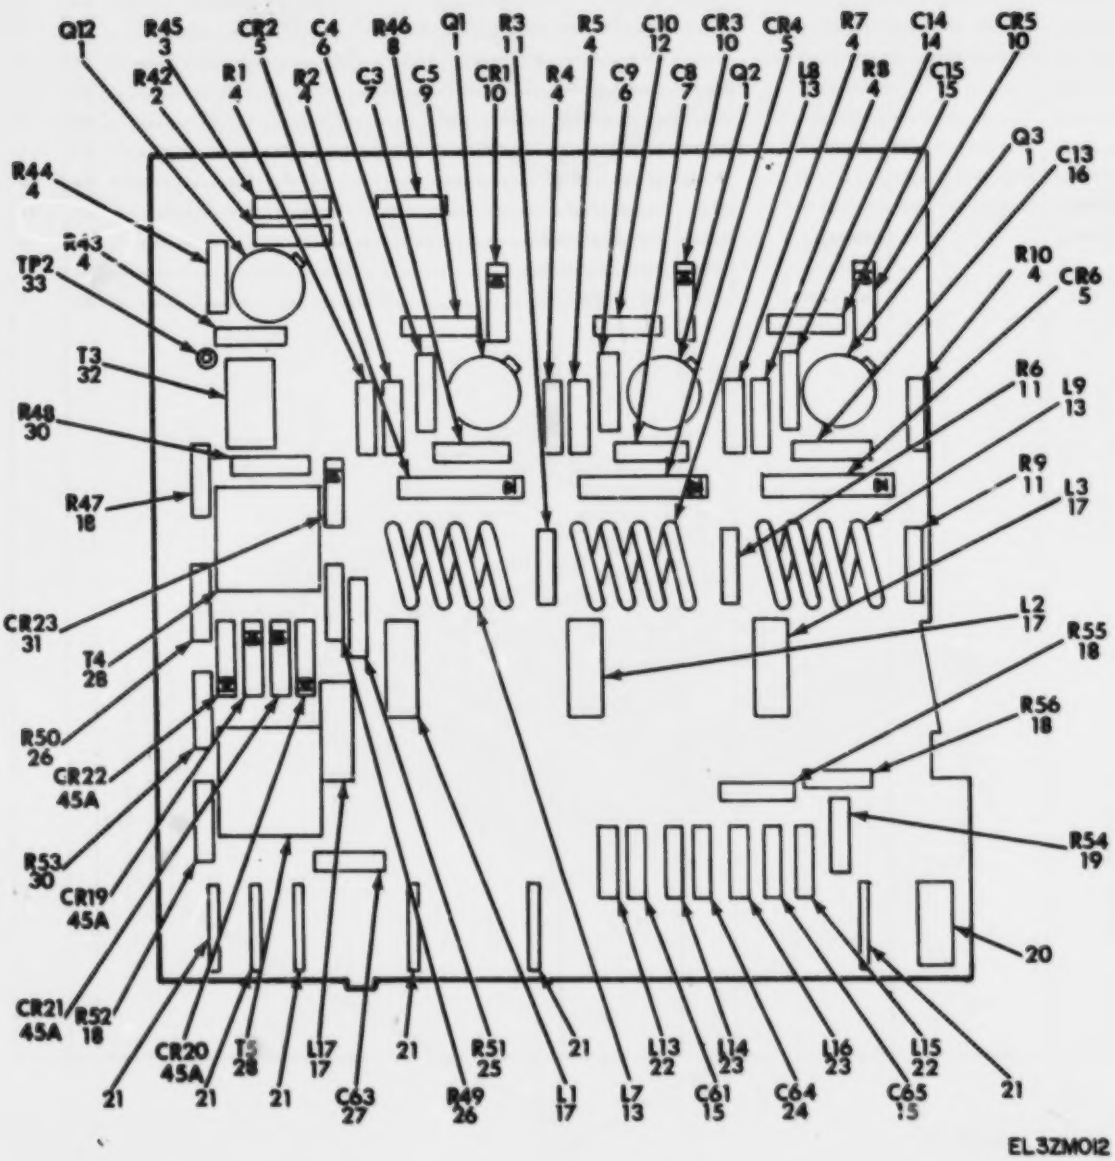

Figure 8. Phase Locked RF Generator (Sheet 1 of 3)



FRONT

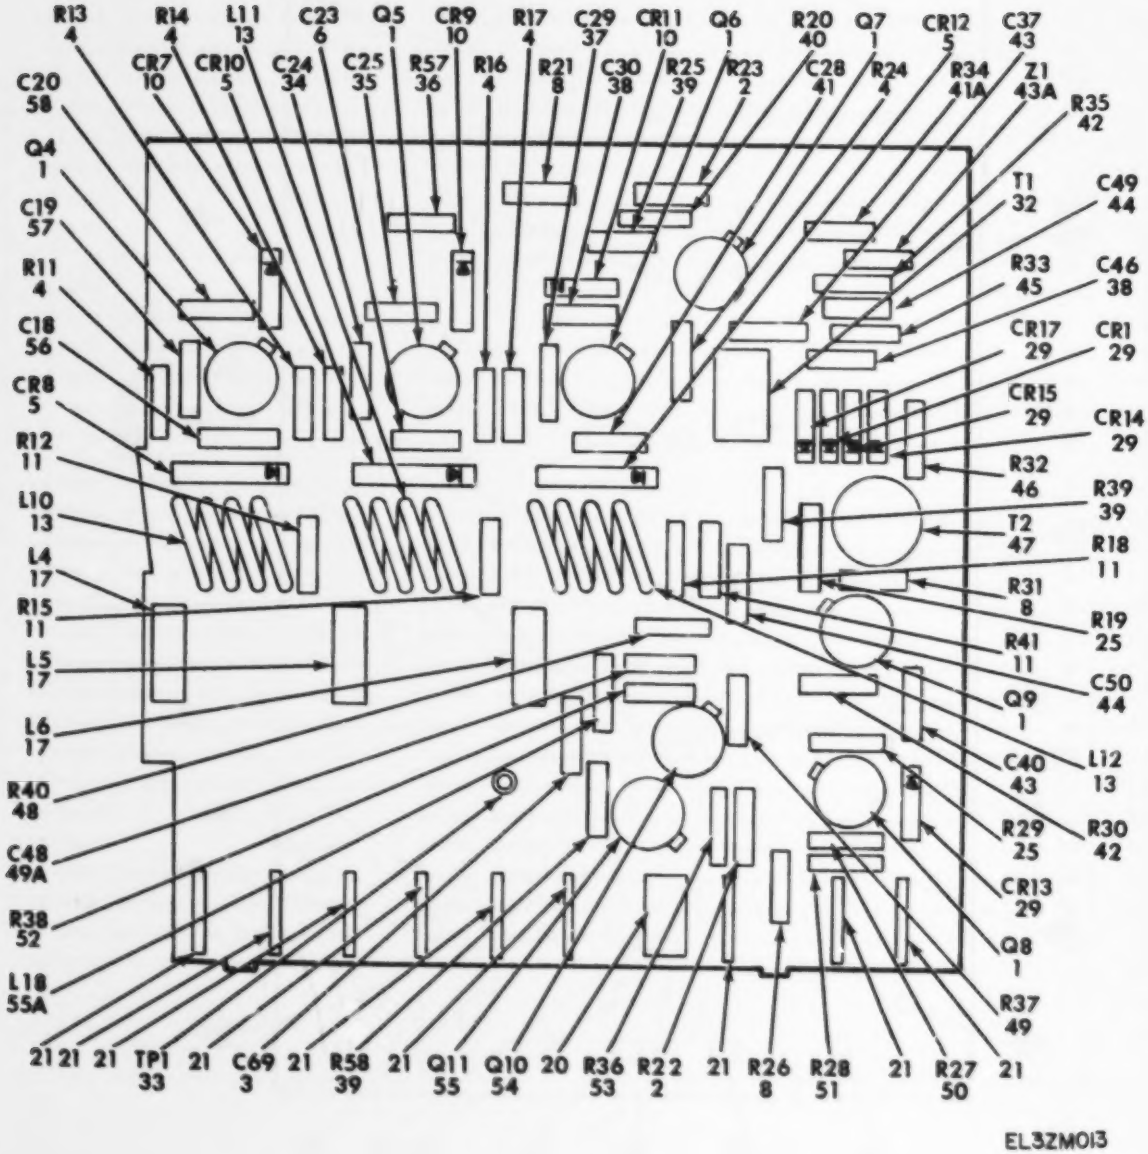

Figure 8. Phase Locked RF Generator (Sheet 2 of 3)

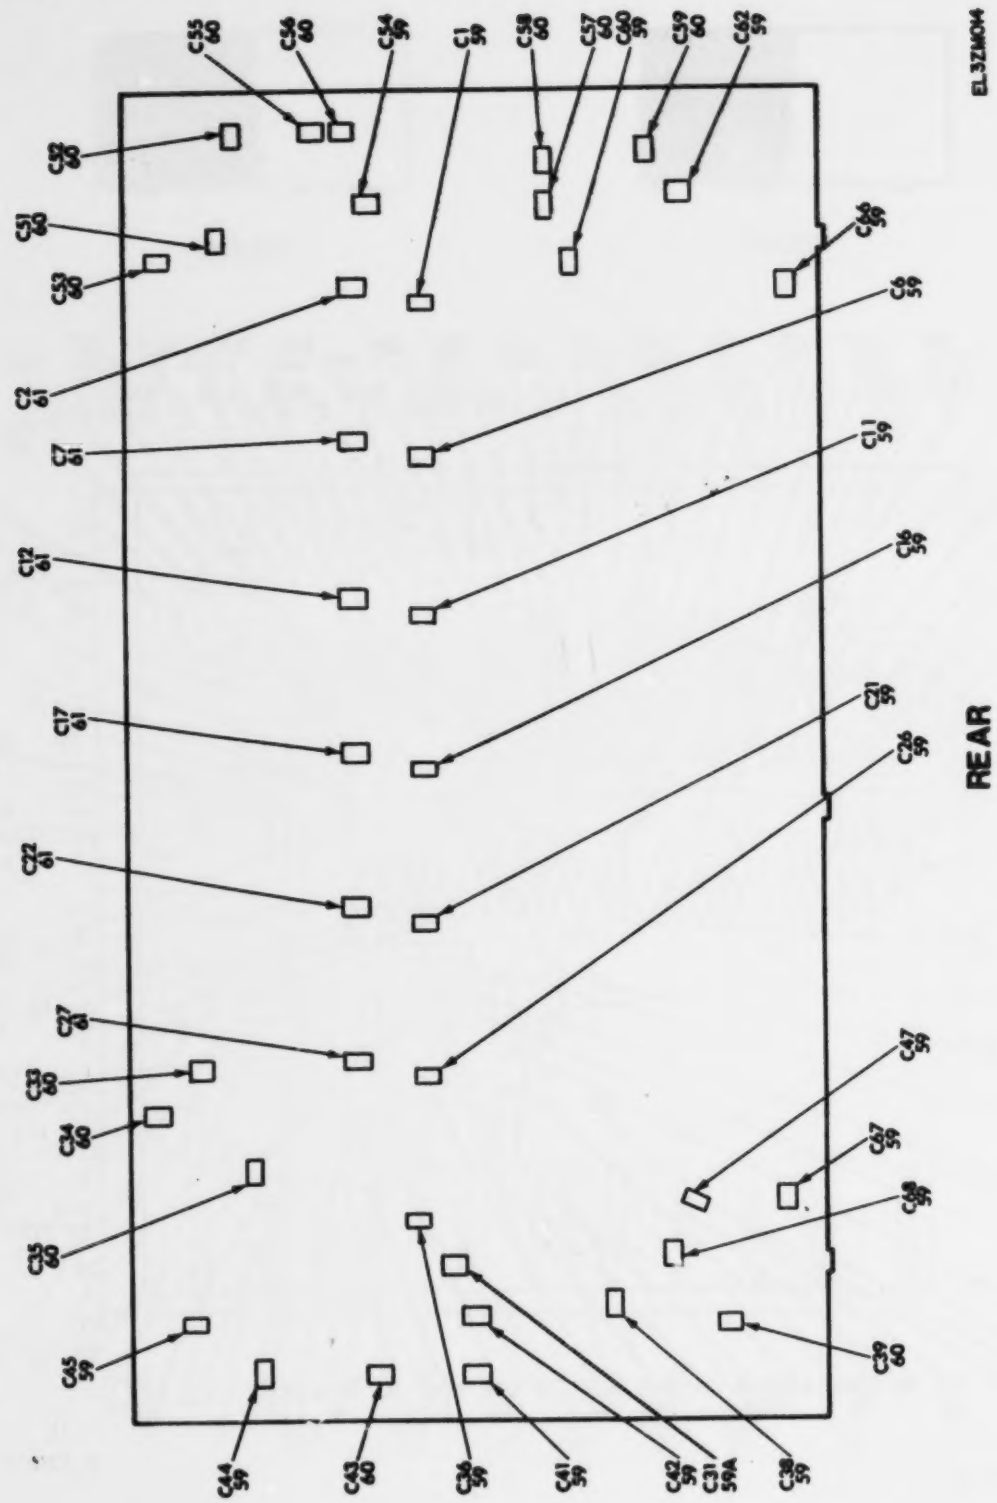

Figure 8. Phase Locked RF Generator (Sheet 3 of 3)

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0301 PHASE LOCKED RF GENERATOR		
8	1	PADZZ	5961-00-926-7294	JAN2N2857	81349	TRANSISTOR	EA	9
8	2	PADZZ	5905-00-782-4105	RL05GF221J	81349	RESISTOR,FIXED,COMP	EA	3
8	3	PADZZ	5905-00-947-7759	RC05GF510J	81349	RESISTOR,FIXED,COMP	EA	2
8	4	PADZZ	5905-00-782-4108	RL05GF472.	81349	RESISTOR,FIXED,COMP	EA	15
8	5	PADZZ	5961-01-019-6290	PG1025	01281	SEMICONDUCTOR DEVIC	EA	6
8	6	PADZZ	5910-00-526-7983	ML105A180J	04222	CAPACITOR,FIXED,CER	EA	3
8	7	PADZZ	5910-01-031-8059	SMA595775-829	80063	CAPACITOR,FIXED,CER	EA	2
8	8	PADZZ	5905-00-923-3534	RC05GF102J	81349	RESISTOR,FIXED,COMP	EA	4
8	9	PADZZ	5910-00-526-8005	ML105A470J	04222	CAPACITOR,FIXED,CER	EA	1
8	10	PADZZ	5961-00-408-0527	JAN1N4532	81349	SEMICONDUCTOR DEVIC	EA	6
8	11	PADZZ	5905-00-922-7215	RC05GF103J	81349	RESISTOR,FIXED,COMP	EA	7
8	12	PADZZ	5910-00-526-8004	ML105A560J	04222	CAPACITOR,FIXED,CER	EA	1
8	13	PADZZ		SMA595911-115	80063	COIL,AIR	EA	6
8	14	PADZZ		ML105A220J	04222	CAPACITOR,FIXE	EA	1
8	15	PADZZ	5910-00-203-3735	ML105A680J	04222	CAPACITOR,FIXED,CER	EA	3
8	16	PADZZ		ML105A100J	04222	CAPACITOR,FIXE	EA	1
8	17	PADZZ	5950-00-160-6157	418-135-22	06978	COIL,RADIO FREQUENC	EA	7
8	18	PADZZ	5905-00-897-2155	RC05GF160J	81349	RESISTOR,FIXED,COMP	EA	4
8	19	PADZZ	5905-00-897-2164	RL05GF620J	81349	RESISTOR,FIXED,COMP	EA	1
8	20	PADZZ	5315-00-182-6197	5204-4012	91662	GUIDE	EA	2
8	21	XDDZA		60-8240-0313-00070	91662	CONTACT,ELECTRICA	EA	15
8	22	PADZZ	5950-00-201-7486	ITU1041-4	09969	COIL,RADIO FREQUENC	EA	2
8	23	PADZZ	5950-00-201-7489	500-2099	93292	COIL,RADIO FREQUENC	EA	2
8	24	PADZZ	5910-00-201-0953	ML105A241J	04222	CAPACITOR,FIXED,CER	EA	1
8	25	PADZZ	5905-00-922-7216	RC05GF332J	81349	RESISTOR,FIXED,COMP	EA	3
8	26	PADZZ	5905-00-947-7840	RL05GF331J	81349	RESISTOR FIXED COMP	EA	2
8	27	PADZZ	5910-00-168-3466	ML105C103M	04222	CAPACITOR,FIXED	EA	1
8	28	PADZZ	5950-00-296-4735	318-0424-01	06978	TRANSFORMER,RADIO F	EA	2
8	29	PADZZ	5961-00-201-7132	HPA8338	28480	SEMICONDUCTOR DEVIC	EA	5
8	30	PADZZ	5905-00-919-0483	RC05GF680J	81349	RESISTOR FIXED COMP	EA	2
8	31	PADZZ	5961-00-421-8882	JAN1N4531	81349	SEMICONDUCTOR DEVIC	EA	1
8	32	PADZZ	5950-00-160-6159	318-230-02	06978	TRANSFORMER,RADIO F	EA	2
8	33	XDDZZ		206484	88245	TERMINAL STU	EA	2
8	34	PADZZ		ML105A300J	04222	CAPACITOR,FIXE	EA	1
8	35	PADZZ	5910-01-007-8766	ML105A101J	04222	CAPACITOR,FIXED,CER	EA	1
8	36	PADZZ	5905-00-401-7429	RCR05G751J5	81349	RESISTOR,FIXED,COMP	EA	1
8	37	PADZZ	5910-00-526-7810	ML105A330J	04222	CAPACITOR,FIXED,CER	EA	1
8	38	PADZZ	5910-00-359-5476	ML105A121J	04222	CAPACITOR,FIXED,CER	EA	2

SECTION II

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
					81349	RESISTOR FIXED COMP	EA	3
8	39	PADZZ	5905-00-912-2815	RC05GF153J	81349	RESISTOR,FIXED,COMP	EA	1
8	40	PADZZ	5905-00-939-3902	RC05GF390J	04222	CAPACITOR,FIXE	EA	1
8	41	PADZZ		ML105A240J	81349	RESISTOR,FIXED,COMP SELECT AT TEST	EA	1
8	41A	PADZZ	5905-01-035-5065	RCR05G103JS	81349	RESISTOR,FIXED,COMP SELECT AT TEST	EA	1
8	41A	PADZZ		RC05GF153K	81349	RESISTOR,FIXED,COMP SELECT AT TEST	EA	1
8	41A	PADZZ		RC05GF223K	81349	RESISTOR,FIXED,COMP SELECT AT TEST	EA	1
8	41A	PADZZ		RC05GF333K	81349	RESISTOR,FIXED,COMP SELECT AT TEST	EA	1
8	41A	PADZZ		RC05GF473K	81349	RESISTOR FIXED COMP SELECT AT TEST	EA	1
8	41A	PADZZ	5905-00-782-4103	RC05GF123J	81349	RESISTOR,FIXED,COMP SELECT AT TEST	EA	1
8	41A	PADZZ	5905-00-782-4104	RC05GF183J	81349	RESISTOR,FIXED,COMP SELECT AT TEST	EA	1
8	41A	PADZZ	5905-00-952-5156	RC05GF273J	81349	RESISTOR,FIXED,COMP SELECT AT TEST	EA	2
8	41A	PADZZ	5905-00-915-0981	RC05GF393J	81349	RESISTOR,FIXED,COMP	EA	2
8	42	PADZZ	5905-00-940-2667	RC05GF223J	04222	CAPACITOR,FIXED,CER	EA	5
8	43	PADZZ	5910-00-458-5804	ML105B102K	80063	ASSY,NETWORK	EA	2
8	43A	XDDZZ		SMA882685-3	81349	CAPACITOR,FIXED,CER	EA	1
8	44	PADZZ	5910-00-550-1691	CK06BX474M	81349	RESISTOR	EA	4
8	45	PADZZ	5905-00-946-9102	RC05GF151J	80063	SEMICONDUCTOR DEVIC MATCHED SET	EA	1
8	45A	PADZZ		SM-A-595827-6	81349	RESISTOR,FIXED,COMP	EA	1
8	46	PADZZ	5905-00-782-4109	RC05GF682J	09969	TRANSFORMER,RADIO F	EA	1
8	47	PADZZ	5950-00-160-6160	1TU1043-9	81349	RESISTOR,FIXED,COMP	EA	1
8	48	PADZZ	5905-00-466-1219	RCR05G823JS	81349	RESISTOR,FIXED,COMP	EA	1
8	49	PADZZ	5905-00-917-5525	RC05GF182J	81349	CAPACITOR	EA	1
8	49A	PADZZ		LK05BX473M	81349	RESISTOR,FIXED,COMP	EA	1
8	50	PADZZ	5905-00-967-4676	RC05GF333J	81349	RESISTOR,FIXED,COMP	EA	1
8	51	PADZZ	5905-00-914-2090	RC05GF561J	81349	RESISTOR,FIXED,COMP	EA	1
8	52	PADZZ	5905-00-923-3535	RC05GF124J	81349	RESISTOR,FIXED,COMP	EA	1
8	53	PADZZ	5905-00-782-4107	RC05GF471J	80063	TRANSISTOR	EA	1
8	54	PADZZ	5961-01-058-7785	SM-A-726664	81349	TRANSISTOR	EA	1
8	55	PADZZ	5961-00-911-6015	JANZN3251A	99800	COIL,RADIO FREQUENC	EA	1
8	55A	PADZZ		1782-40	04222	CAPACITOR,FIXED,CER	EA	1
8	56	PADZZ	5910-00-975-2947	ML105A120J	04222	CAPACITOR,FIXE	EA	1
8	57	PADZZ		ML105A270J	04222	CAPACITOR,FIXE	EA	19
8	58	PADZZ		ML105B820J	81349	CAPACITOR,FIXED,CER	EA	13
8	59	XDDZZ	5910-00-159-6861	CDR01BX332BKSM	04222	CAPACITOR,FIXED,CER	EA	6
8	60	PADZZ	5910-01-031-8031	ULA105C102M	96095	CAPACITOR,FIXED,CER		
8	61	PADZZ	5910-01-026-4882	ULA105A101K				

28/(29 BLANK)

FRONT

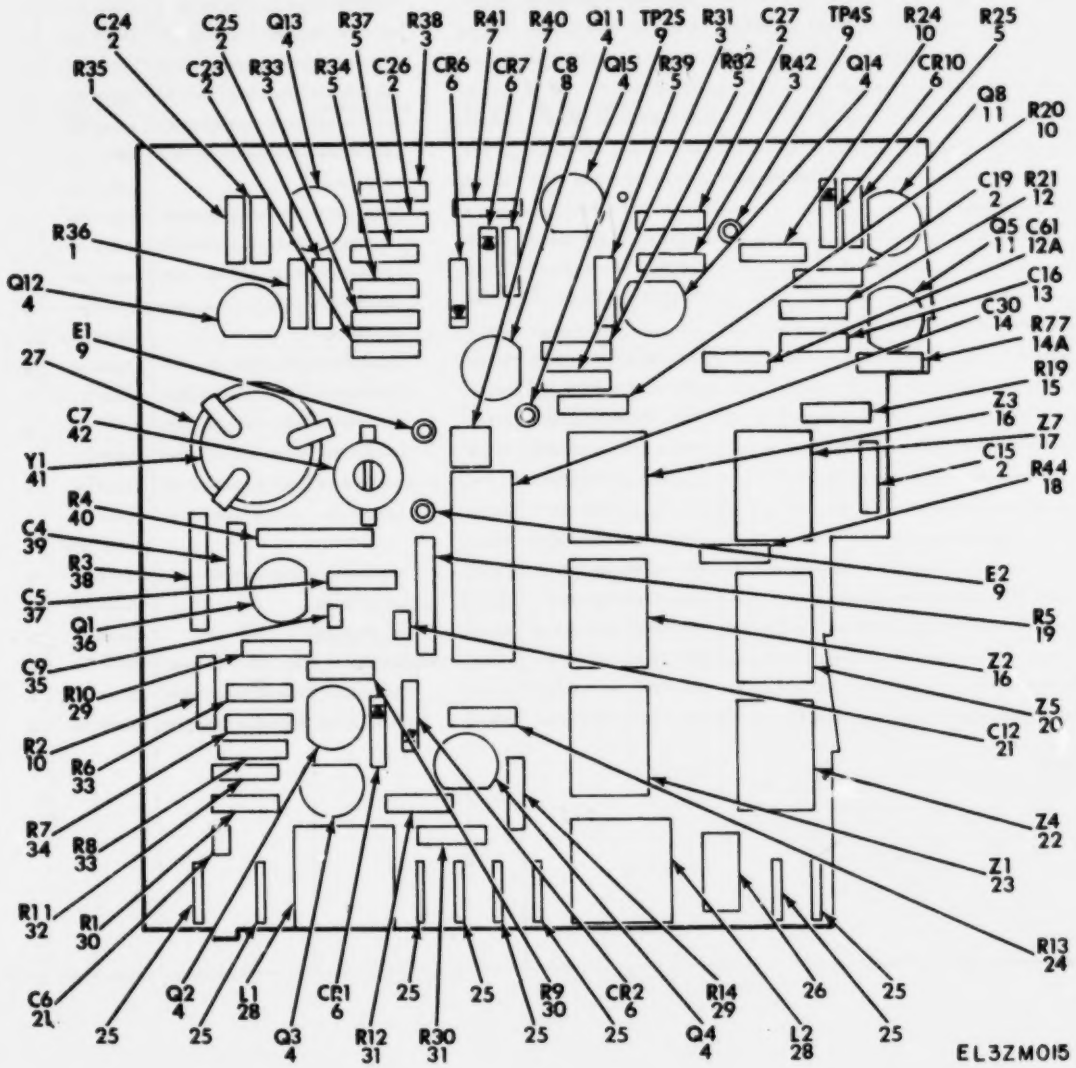

Figure 9. Dividers 10MC Oscillator (Sheet 1 of 3)

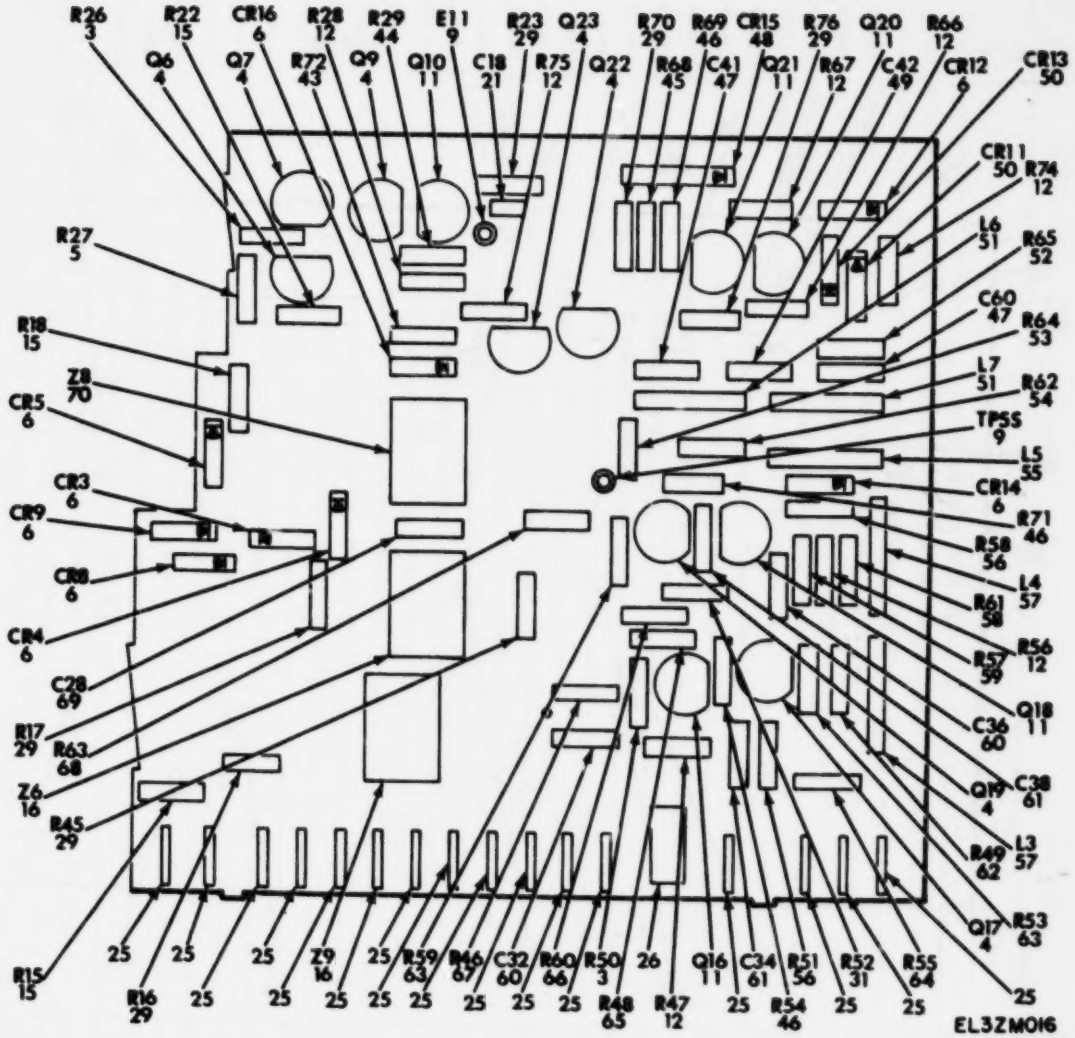

Figure 9. Dividers 10MC Oscillator (Sheet 2 of 3)

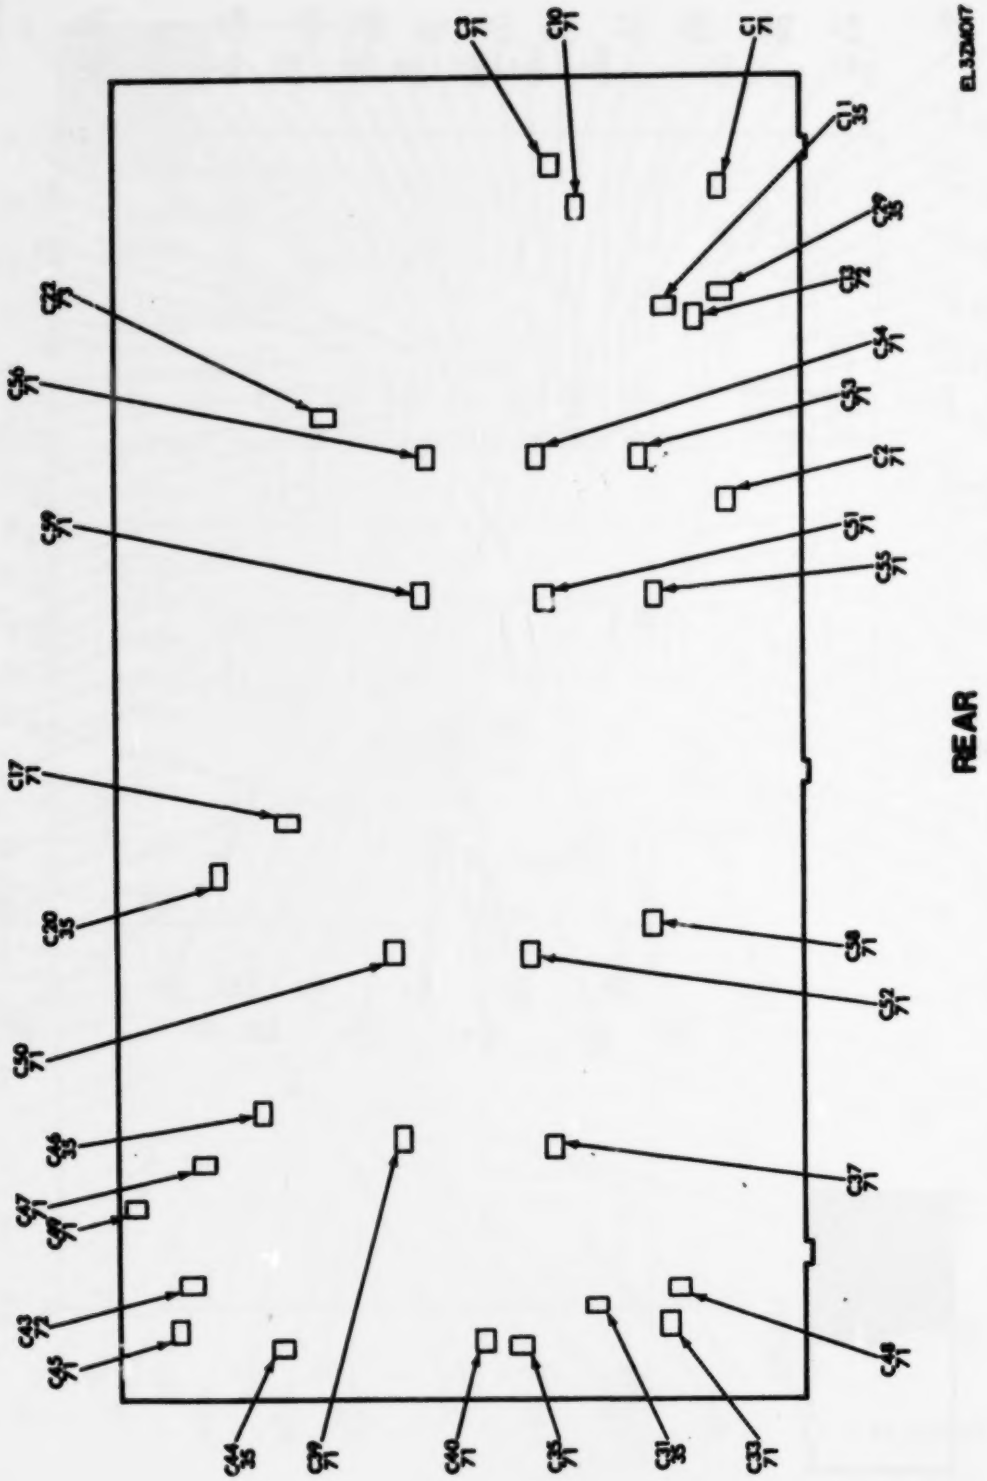

Figure 9. Dividers 10MC Oscillator (Sheet 3 of 3)

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0302 DIVIDERS 10 MC OSC		
9	1	PADZZ	5905-00-912-2815	RC05GF153J	81349	RESISTOR FIXED COMP	EA	2
9	2	PADZZ	5910-01-003-8766	ML105A101J	04222	CAPACITOR,FIXED,CER	EA	7
9	3	PADZZ	5905-00-940-2867	RC05GF223J	81349	RESISTOR,FIXED,COMP	EA	6
9	4	PADZZ	5961-00-134-1494	SMA726655	80063	TRANSISTOR	EA	15
9	5	PADZZ	5905-00-782-4108	RC05GF472J	81349	RESISTOR,FIXED,COMP	EA	6
9	6	PADZZ	5961-00-421-8882	JAN1N4531	81349	SEMICONDUCTOR DEVIC	EA	13
9	7	PADZZ	5905-00-782-4109	RC05GF682J	81349	RESISTOR,FIXED,COMP	EA	2
9	8	PADZZ		8111A100R2G22UK	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100A2G27OK	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100R2G33OK	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100R2G39OK	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100T2H22UK	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100T2H27OK	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100T2H33OK	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100T2H39OK	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100U2J22OK	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100U2J27OK	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100U2J33OK	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100U2J39OK	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8121A100C0G22OK	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8121A100C0G33OK	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8121A100C0G39OK	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100R2G22OJ	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100R2G24OJ	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100R2G27OJ	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100R2G30OJ	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100R2G33OJ	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100R2G36OJ	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100R2G39OJ	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ	5910-00-448-9248	8111A200T2H022OG	18796	CAPACITOR,FIXED,CER (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100T2H24OJ	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100T2H27OJ	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100T2H30OJ	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100T2H33OJ	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100T2H36OJ	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8111A100T2H39OJ	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8121A100C0G22OJ	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		8121A100C0G24OJ	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ	5910-01-039-8085	8121A100C0G27OJ	72982	CAPACITOR,FIXED,CER (SELECT-AT-TEST)	EA	1

SECTION II

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
9	8	PADZZ		0121A100C0G300J	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ	5910-01-006-6874	0121A100C0G330J	72982	CAPACITOR,FIXED,CER (SELECT-AT-TEST)	EA	1
9	8	PADZZ		0121A100C0G360J	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	8	PADZZ		0121A100C0G390J	72982	CAPACITO (SELECT-AT-TEST)	EA	1
9	9	PADZZ	5940-00-611-8492	203184	88245	TERMINAL,STUD	EA	6
9	10	PADZZ	5905-00-926-8453	RC05GF391J	81349	RESISTOR,FIXED,COMP	EA	3
9	11	PADZZ	5961-00-126-5245	SMA726650	80063	TRANSISTOR	EA	7
9	12	PADZZ	5905-00-922-7215	RC05GF103J	81349	RESISTOR,FIXED,COMP	EA	8
9	12A	PADZZ	5910-00-660-0850	CSR13G105MM	81349	CAPACITOR	EA	1
9	13	PADZZ	5910-00-201-0955	ML105B202K	04222	CAPACITOR,FIXED,CER	EA	1
9	14	PADZZ	5910-00-433-5446	M26655/2-0094	81349	CAPACITOR FIXED	EA	1
9	14A	PADZZ	5905-00-180-8301	RCR05G101JS	81349	RESISTOR,FIXED,COMP	EA	4
9	15	PADZZ	5905-00-922-7216	RC05GF332J	81349	RESISTOR,FIXED,COMP	EA	6
9	16	PADZZ	5962-00-126-0493	CC4367W	18324	MICROCIRCUIT,DIGITA	EA	6
9	17	PADZZ	5962-00-454-4039	S8424J	18324	MICROCIRCUIT,DIGITA	EA	1
9	18	PADZZ	5905-00-945-6957	RC05GF222J	81349	RESISTOR,FIXED,COMP	EA	1
9	19	PADZZ	5905-00-702-4439	RC07GF133J	81349	RESISTOR,FIXED,COMP	EA	6
9	20	PADZZ	5962-00-211-1260	CC4365	18324	MICROCIRCUIT,DIGITA	EA	3
9	21	PADZZ	5910-00-056-4884	ULA505C104KM	96095	CAPACITOR,FIXED,CER	EA	6
9	22	PADZZ	5962-00-463-3207	S8826J	18324	MICROCIRCUIT,DIGITA	EA	6
9	23	PADZZ		CC4368W	18324	MICROCIRCUIT,DIGITA	EA	1
9	24	PADZZ	5905-00-470-9163	RCR05G622JS	81349	RESISTOR,FIXED,COMP	EA	24
9	25	XDDZA		60-8240-0313-00070	91662	CONTACT,ELECTRICA	EA	2
9	26	PADZZ	5315-00-182-6197	5204-4012	91662	GUIDE	EA	1
9	27	PADZZ		294662	76530	INSULATOR,SPACER	EA	2
9	28	PADZZ	5950-00-185-9588	418-135-24	06978	COIL,RADIO FREQUENC	EA	8
9	29	PADZZ	5905-00-922-3534	RC05GF102J	81349	RESISTOR,FIXED,COMP	EA	2
9	30	PADZZ	5905-00-782-4106	RC05GF470J	81349	RESISTOR,FIXED,COMP	EA	3
9	31	PADZZ	5905-00-424-3798	RCR05G621JS	81349	RESISTOR,FIXED,COMP	EA	1
9	32	PADZZ	5905-00-914-2151	RC05GF100J	81349	RESISTOR FIXED COMP	EA	2
9	33	PADZZ	5905-00-940-2668	RC05GF472J	81349	RESISTOR,FIXED,COMP	EA	1
9	34	PADZZ		RC05GF822K	81349	RESISTOR,FIXE	EA	7
9	35	PADZZ	5910-01-031-8031	ULA105C102M	04222	CAPACITOR,FIXED,CER	EA	6
9	36	PADZZ	5961-00-201-7133	SPS6988H	04713	TRANSISTOR	EA	1
9	37	PADZZ	5910-00-451-4091	ML105A471J	04222	CAPACITOR,FIXED,CER	EA	1
9	38	PADZZ	5905-00-723-5251	RCU7GF222J	81349	RESISTOR,FIXED,COMP	EA	1
9	39	PADZZ	5910-00-201-0950	ML105A151J	04222	CAPACITOR,FIXED,CER	EA	1
9	40	PADZZ	5905-00-683-2246	RCU7GF473J	81349	RESISTOR,FIXED,COMP	EA	1
9	41	PADZZ	5955-00-548-1397	SMA595073-12	80063	CRYSTAL UNIT,QUARTZ	EA	1

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
9	42	PAOZZ	5910-00-013-9658	CV35A090	66486	CAPACITOR,VARIABLE	EA	6
9	43	PAOZZ	5905-00-421-8918	RCR05G302J5	81349	RESISTOR,FIXED,COMP	EA	1
9	44	PAOZZ	5905-00-782-4103	RC05GF123J	81349	RESISTOR FIXED COMP	EA	1
9	45	PAOZZ	5905-00-470-9480	RCR05G132J5	81349	RESISTOR,FIXED,COMP	EA	1
9	46	PAOZZ	5905-00-917-5524	RC05GF202J	81349	RESISTOR,FIXED,COMP	EA	3
9	47	PAOZZ	5910-01-031-8099	SMA595775-829	80063	CAPACITOR,FIXED,CER	EA	2
9	48	PAOZZ	5961-00-201-7134	SZA41	13327	SEMICONDUCTOR DEVIC	EA	1
9	49	PAOZZ		ML105A248J	04222	CAPACITOR,FIXE	EA	1
9	50	PAOZZ	5961-00-201-7132	HPA8338	28480	SEMICONDUCTOR DEVIC	EA	1
9	51	PAOZZ		1782-40	99800	COIL,RADIO FREQUENC	EA	2
9	52	PAOZZ	5905-00-948-8451	RC05GF511J	81349	RESISTOR,FIXED,COMP	EA	1
9	53	PAOZZ	5905-00-831-0745	RC05GF271J	81349	RESISTOR,FIXED,COMP	EA	1
9	54	PAOZZ	5905-00-943-9097	RC05GF201J	81349	RESISTOR FIXED COMP	EA	1
9	55	PAOZZ	5950-00-982-2375	1025-52	99800	COIL,RADIO FREQUENC	EA	1
9	56	PAOZZ	5905-00-939-1360	RC05GF820J	81349	RESISTOR,FIXED,COMP	EA	2
9	57	PAOZZ	5950-00-711-2692	1025-44	99800	COIL,RADIO FREQUENC	EA	2
9	58	PAOZZ	5905-00-946-9102	RC05GF151J	81349	RESISTOR	EA	1
9	59	PAOZZ	5905-00-947-5522	RC05GF203J	81349	RESISTOR	EA	1
9	60	PAOZZ	5910-00-201-0948	ML105B102J	04222	CAPACITOR,FIXED,CER	EA	2
9	61	PAOZZ		ML105A220J	04222	CAPACITOR,FIXE	EA	2
9	62	PAOZZ	5905-00-945-5291	RC05GF681J	81349	RESISTOR,FIXED,COMP	EA	1
9	63	PAOZZ	5905-00-947-6216	RC05GF270J	81349	RESISTOR FIXED C	EA	2
9	64	PAOZZ	5905-00-914-2090	RC05GF561J	81349	RESISTOR,FIXED,COMP	EA	1
9	65	PAOZZ	5905-00-924-3281	RC05GF122J	81349	RESISTOR,FIXED,COMP	EA	1
9	66	PAOZZ	5905-00-931-4126	RC05GF301J	81349	RESISTOR,FIXED,COMP	EA	1
9	67	PAOZZ	5905-00-957-2008	RC05GF560J	81349	RESISTOR,FIXED,C	EA	1
9	68	PAOZZ	5905-00-782-4105	RC05GF221J	81349	RESISTOR,FIXED,COMP	EA	1
9	69	PAOZZ	59 0-00-168-3466	ML105C103M	04222	CAPACITOR,FIXED	EA	1
9	70	PAOZZ	59e2-00-951-9428	CC4363W	18324	MICROCIRCUIT,DIGITA	EA	6
9	71	XBDZZ	5910-00-139-6861	CDR01BX332BKSM	81349	CAPACITOR,FIXED,CER	EA	23
9	72	PAOZZ	5910-01-026-4802	ULA105A101K	96095	CAPACITOR,FIXED,CER	EA	2
9	73	PAOZZ	5910-01-031-8040	ULA105A68J	96095	CAPACITOR,FIXED,CER	EA	1

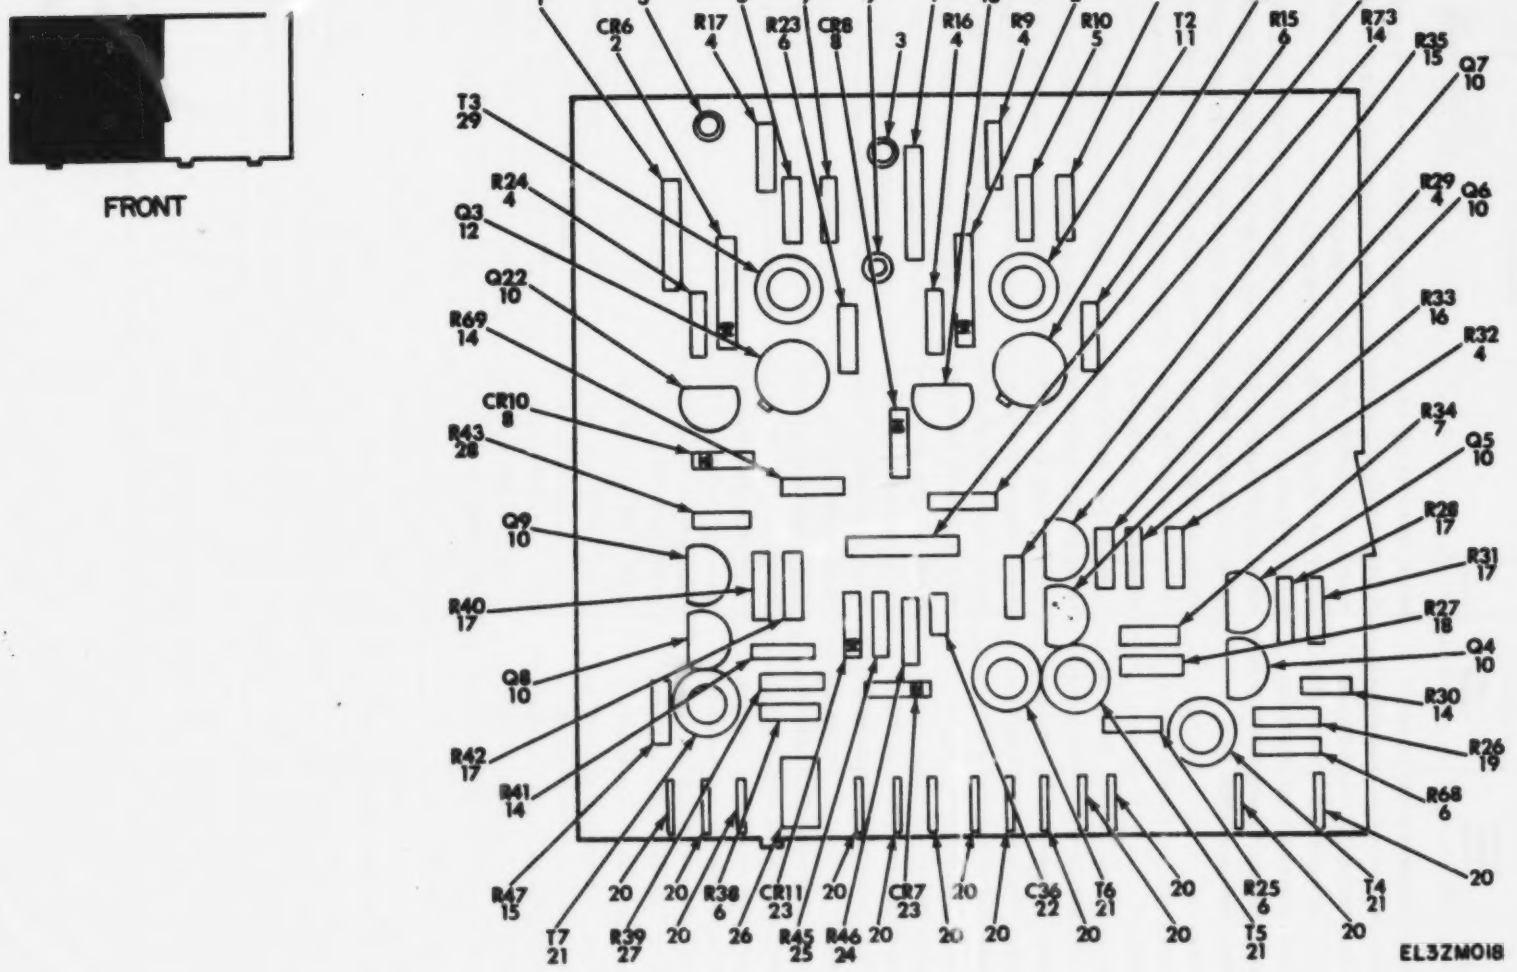

Figure 10. VCO and Digital/Analog Converter Assembly (Sheet 1 of 3)



FRONT

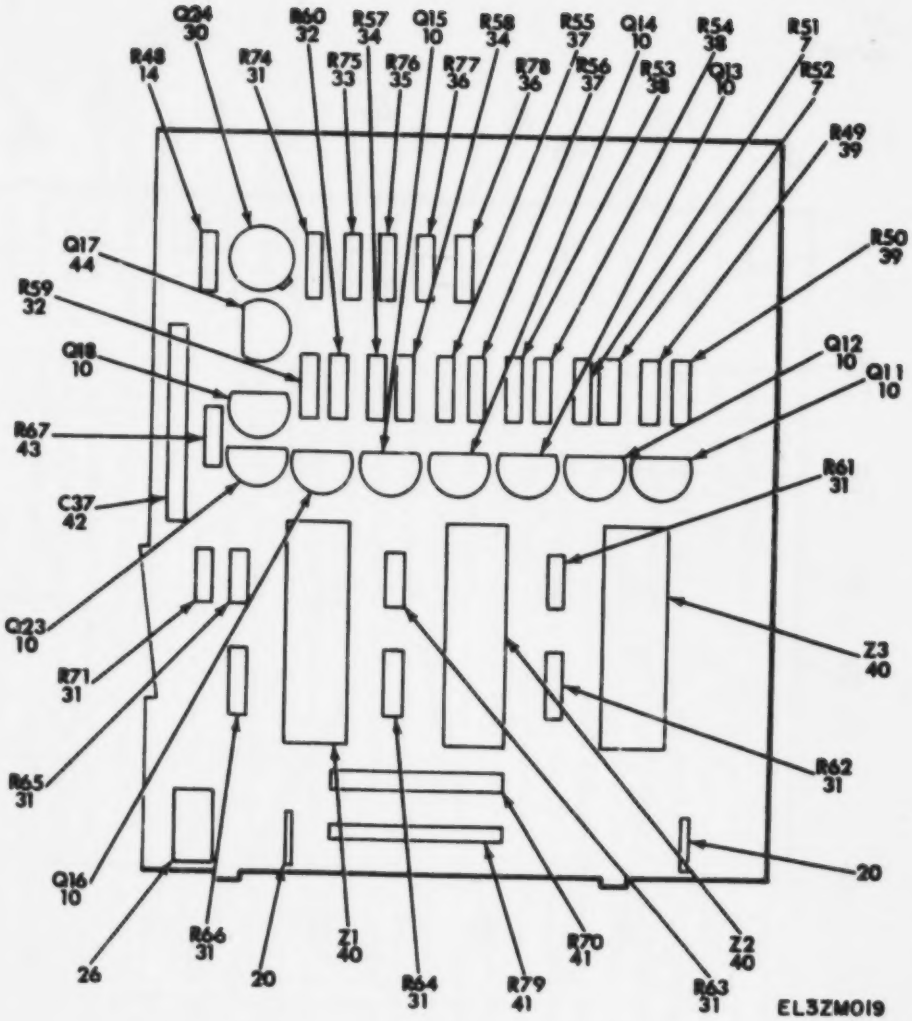

Figure 10. VCO AND Digital/Analog Converter Assembly (Sheet 2 of 3)

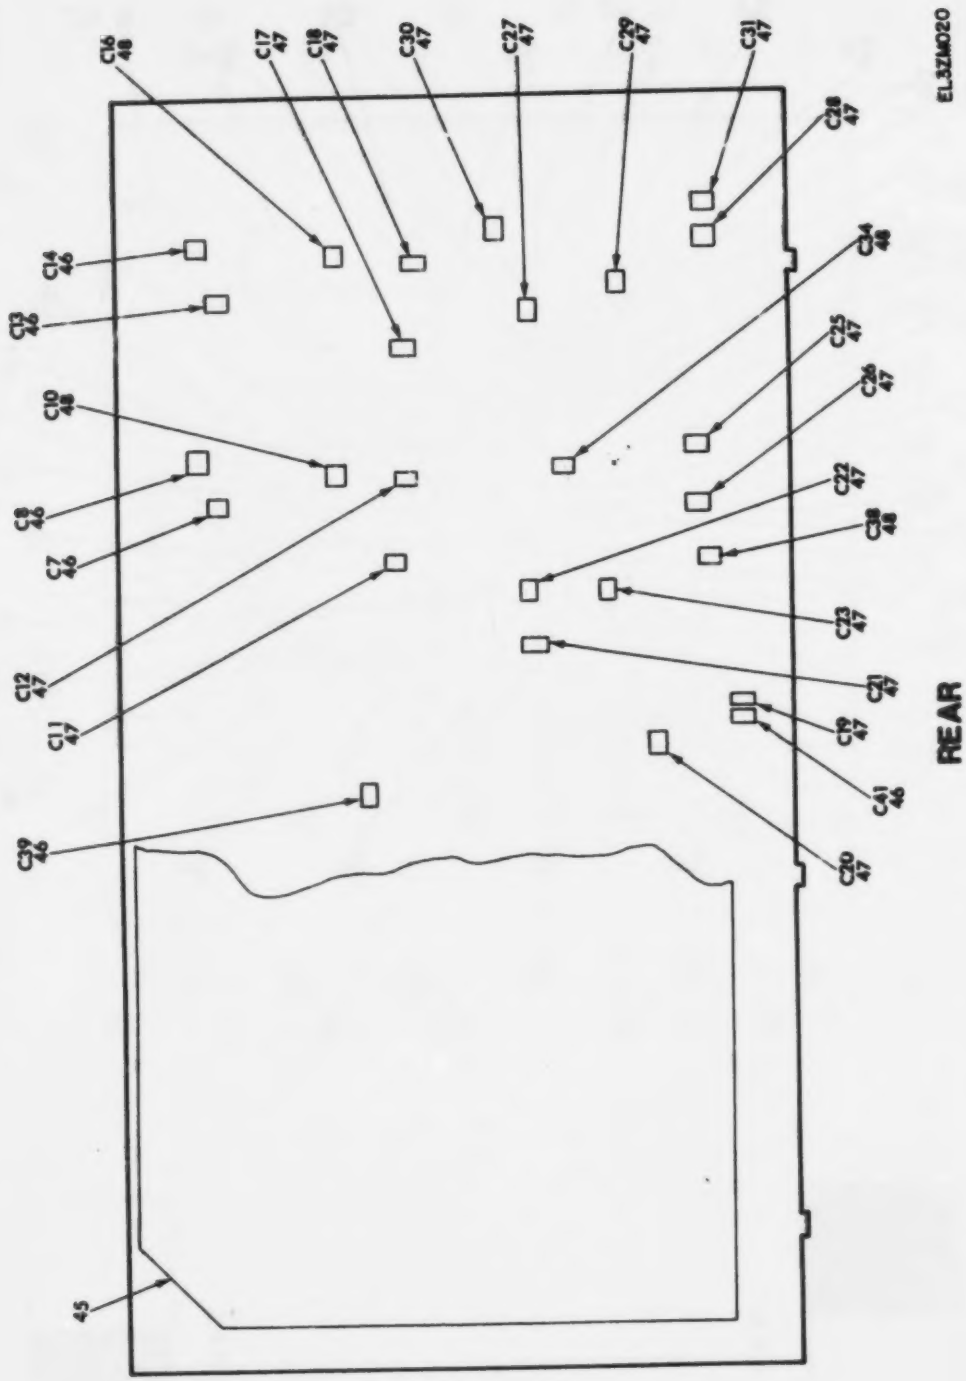

Figure 10. VCO and Digital/Analog Converter Assembly (Sheet 3 of 3)

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0303 VCO AND D-A CONVERTER ASSEMBLY		
10	1	PAOZZ	5950-00-981-5782	1025-56	99800	COIL,RADIO FREQUENC	EA	2
10	2	PAOZZ	5961-01-019-6290	PG1025	01281	SEMICONDUCTOR DEVIC	EA	2
10	3	PAOZZ	5940-00-411-8492	203184	88245	TERMINAL,STUD	EA	2
10	4	PAOZZ	5905-00-458-9500	RCR05G102JS	81349	RESISTOR,FIXED,COMP	EA	6
10	5	PAOZZ	5905-00-940-2667	RC05GF223J	81349	RESISTOR,FIXED,COMP	EA	2
10	6	PAOZZ	5905-00-180-8301	RCR05G101JS	81349	RESISTOR,FIXED,COMP	EA	5
10	7	PAOZZ	5905-00-912-2815	RC05GF153J	81349	RESISTOR FIXED COMP	EA	5
10	8	PAOZZ	5961-00-421-8882	JAN1N4531	81349	SEMICONDUCTOR DEVIC	EA	2
10	9	PAOZZ		8035	70528	EYELET,METALLIC	EA	1
10	10	PAOZZ	5961-00-134-1494	SMA726655	80063	TRANSISTOR	EA	16
10	11	PAOZZ	5950-00-201-7503	ITU1042-20	09969	TRANSFORMER,RADIO F	EA	1
10	12	PAOZZ		SM-A-618652-2	80063	TRANSISTOR	EA	2
10	13	PAOZZ	5905-00-801-2377	RC07GF750J	81349	RESISTOR,FIXED,COMP	EA	1
10	14	PAOZZ	5905-01-035-5065	RCR05G103JS	81349	RESISTOR,FIXED,COMP	EA	5
10	15	PAOZZ	5905-00-116-2396	RCR07G511JS	81349	RESISTOR,FIXED,COMP	EA	2
10	16	PAOZZ	5905-00-924-3317	RC05GF152J	81349	RESISTOR,FIXED,COMP	EA	1
10	17	PAOZZ	5905-00-922-7216	RC05GF332J	81349	RESISTOR,FIXED,COMP	EA	4
10	18	PAOZZ	5905-00-914-2089	RC05GF562J	81349	RESISTOR,FIXED,COMP	EA	1
10	19	PAOZZ	5905-00-942-3744	RC05GF822J	81349	RESISTOR,FIXED,COMP	EA	1
10	20	ADOZZA		60-8240-0313-00070	91662	CONTACT,ELECTRICA	EA	15
10	21	PAOZZ	5950-00-295-5659	ITU1043-3	09969	TRANSFORMER,RADIO F	EA	4
10	22	PAOZZ	5910-00-056-4864	ULA505C104KM	96095	CAPACITOR,FIXED,CER	EA	1
10	23	PAOZZ	5961-00-408-0527	JAN1N4532	81349	SEMICONDUCTOR DEVIC	EA	2
10	24	PAOZZ		RC05GF333K	81349	RESISTOR,FIXED,COMP	EA	1
10	25	PAOZZ		RC05GF154K	81349	RESISTOR,FIXE	EA	1
10	26	PAOZZ	5315-00-182-6197	5204-4012	91662	GUIDE	EA	2
10	27	PAOZZ	5905-00-965-6957	RC05GF222J	81349	RESISTOR,FIXED,COMP	EA	1
10	28	PAOZZ	5905-01-044-1504	RC05GF821K	81349	RESISTOR,FIXED,COMP	EA	1
10	29	PAOZZ	5950-00-201-7516	ITU1042-22	09969	TRANSFORMER,RADIO F	EA	1
10	30	PAOZZ		SS3747	04713	TRANSISTOR	EA	1
10	31	PAOZZ	5905-00-617-5096	RCR05G682JS	81349	RESISTOR,FIXED,COMP	EA	8
10	32	PAOZZ	5905-00-407-0083	RCR05G244JS	81349	RESISTOR,FIXED,COMP	EA	2
10	33	PAOZZ	5905-00-407-0089	RCR05G753JS	81349	RESISTOR,FIXED,COMP	EA	1
10	34	PAOZZ	5905-00-925-8535	RC05GF124J	81349	RESISTOR,FIXED,COMP	EA	2
10	35	PAOZZ	5905-00-925-8763	RC05GF334J	81349	RESISTOR,FIXED,COMP	EA	1
10	36	PAOZZ	5905-00-946-9103	RC05GF154J	81349	RESISTOR,FIXED,COMP	EA	2
10	37	PAOZZ	5905-00-915-0983	RC05GF623J	81349	RESISTOR,FIXED,COMP	EA	2
10	38	PAOZZ	5905-00-471-2226	RCR05G303JS	81349	RESISTOR,FIXED,COMP	EA	2

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
10	39	PADZZ		RLO5GF752G	81349	RESISTOR,FIXE	EA	2
10	40	PADZZ	5962-00-220-9042	SC628154H	04713	MICROCIRCUIT,DIGITA	EA	3
10	41	PADZZ	5905-00-195-6806	RC20GF102J	81349	RESISTOR,FIXED,COMP	EA	2
10	42	PADZZ	5910-00-460-0850	CSR13G105MM	81349	CAPACITOR	EA	1
10	43	PADZZ		RC05GF473K	81349	RESISTOR,FIXED,COMP	EA	1
10	44	PADZZ	5961-00-124-5245	SMA726058	80063	TRANSISTOR	EA	1
10	45	XBDZZ		SMC632171	80063	SHIELD,RADIO	EA	1
10	46	XBDZZ	5910-00-159-6861	CDR01BX332BKSN	81349	CAPACITOR,FIXED,CER	EA	6
10	47	PADZZ	5910-01-026-4802	ULA105A101K	96095	CAPACITOR,FIXED,CER	EA	16
10	48	PADZZ	5910-01-031-8031	ULA105C102M	04222	CAPACITOR,FIXED,CER	EA	4

40/(41 BLANK)

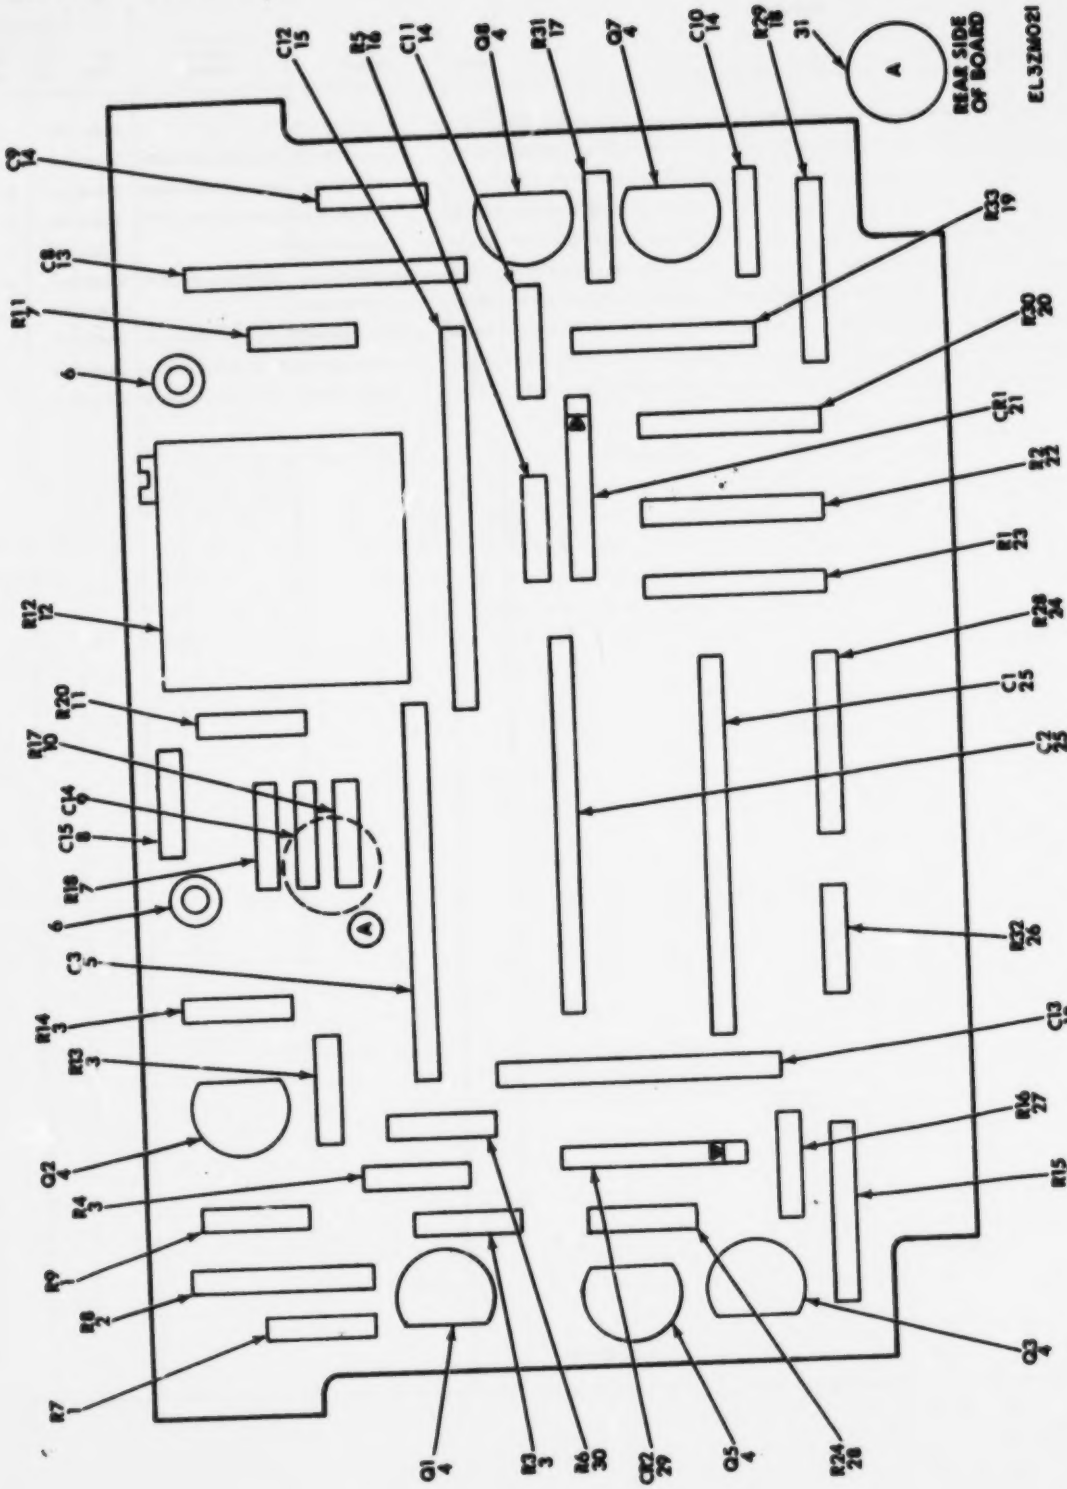

Figure 11. Transmit Audio and Comparator Assembly

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0304 TRANSMIT AUDIO AND COMPARATOR A SSEMBLY		
11	1	PADZZ	5905-00-944-9102	RC05GF151J	81349	RESISTOR	EA	2
11	2	PADZZ	5905-00-683-7723	RC07GF152J	81349	RESISTOR,FIXED,COMP	EA	1
11	3	PADZZ	5905-00-006-5561	RLR05C2702GA	81349	RESISTOR,FIXED,FILM	EA	4
11	4	PADZZ	5961-00-134-1494	SMA726655	80063	TRANSISTOR	EA	6
11	5	PADZZ		SV15-1035100	04411	CAPACITOR,FIXE	EA	1
11	6	PADZZ		2031A4	88245	TERMINAL,STU	EA	2
11	7	PADZZ	5905-00-782-4103	RC05GF123J	81349	RESISTOR FIXED COMP	EA	2
11	8	PADZZ		ML105B322K	04222	CAPACITOR,FIXE	EA	1
11	9	PADZZ		ML105A391J	04222	CAPACITOR,FIXE	EA	1
11	10	PADZZ	5905-00-471-2226	RCR05G303JS	81349	RESISTOR,FIXED,COMP	EA	1
11	11	PADZZ	5905-00-601-7424	RCR05G222JS	81349	RESISTOR,FIXED,COMP	EA	1
11	12	PADZZ		209-10-2K	84048	RESISTOR,VARIABLE	EA	1
11	13	PADZZ	5910-00-460-0850	CSR13G105MM	81349	CAPACITOR	EA	2
11	14	PADZZ	5910-00-168-3466	ML105C103M	04222	CAPACITOR,FIXED	EA	3
11	15	PADZZ	5910-00-495-0042	M39003/01-3076	81349	CAPACITOR,FIXED,ELE	EA	1
11	16	PADZZ	5905-00-914-4054	RC05GF243J	81349	RESISTOR,FIXED,COMP	EA	1
11	17	PADZZ	5905-00-782-4109	RC05GF682J	81349	RESISTOR,FIXED,COMP	EA	1
11	18	PADZZ	5905-00-965-5561	RN55D1102F	81349	RESISTOR,FIXED,FILM	EA	1
11	19	PADZZ	5905-00-752-3338	RC07GF102K	81349	RESISTOR,FIXED,COMP	EA	2
11	20	PADZZ	5905-00-889-0229	RN55D7500F	81349	RESISTOR,FIXED,FILM	EA	1
11	21	PADZZ	5961-00-421-8882	JAN1N4531	81349	SEMICONDUCTOR DEVIC	EA	1
11	22	PADZZ	5905-00-985-5607	RN55D1500F	81349	RESISTOR,FIXED,FILM	EA	1
11	23	PADZZ	5905-00-689-9777	RN55D9090F	81349	RESISTOR,FIXED,FILM	EA	1
11	24	PADZZ	5905-00-965-9085	RN55D9091F	81349	RESISTOR,FIXED,FILM	EA	1
11	25	PADZZ		SV15-1045100	04411	CAPACITOR,FIXE	EA	2
11	26	PADZZ	5905-00-914-2088	RC05GF512J	81349	RESISTOR,FIXED,COMP	EA	1
11	27	PADZZ		RC05GF153K	81349	RESISTOR,FIXED,COMP	EA	1
11	28	PADZZ	5905-01-035-5065	RCR05G103JS	81349	RESISTOR,FIXED,COMP	EA	1
11	29	PADZZ	5961-00-469-2417	1N4741	80131	SEMICONDUCTOR DEVIC	EA	1
11	30	PADZZ	5905-00-923-3534	RC05GF102J	81349	RESISTOR,FIXED,COMP	EA	1
11	31	XDDZZ		SMA882655	80063	PAD,VIBRATION	EA	1

43/(44 BLANK)

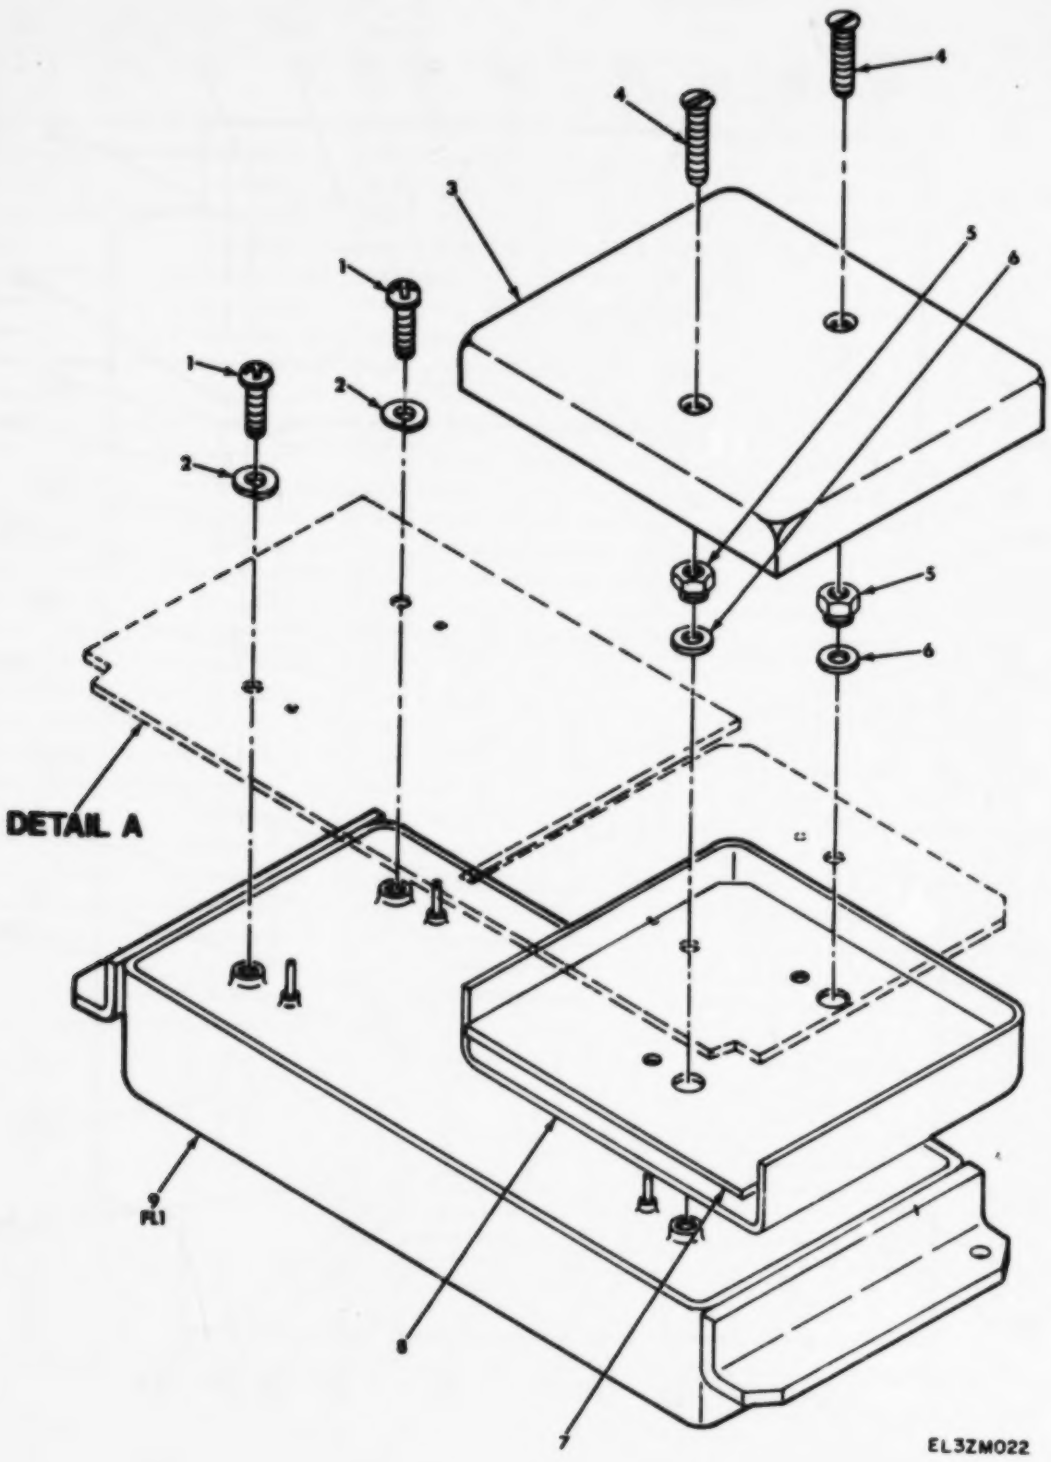

Figure 12. Guard IF Amplifier (Sheet 1 of 2)

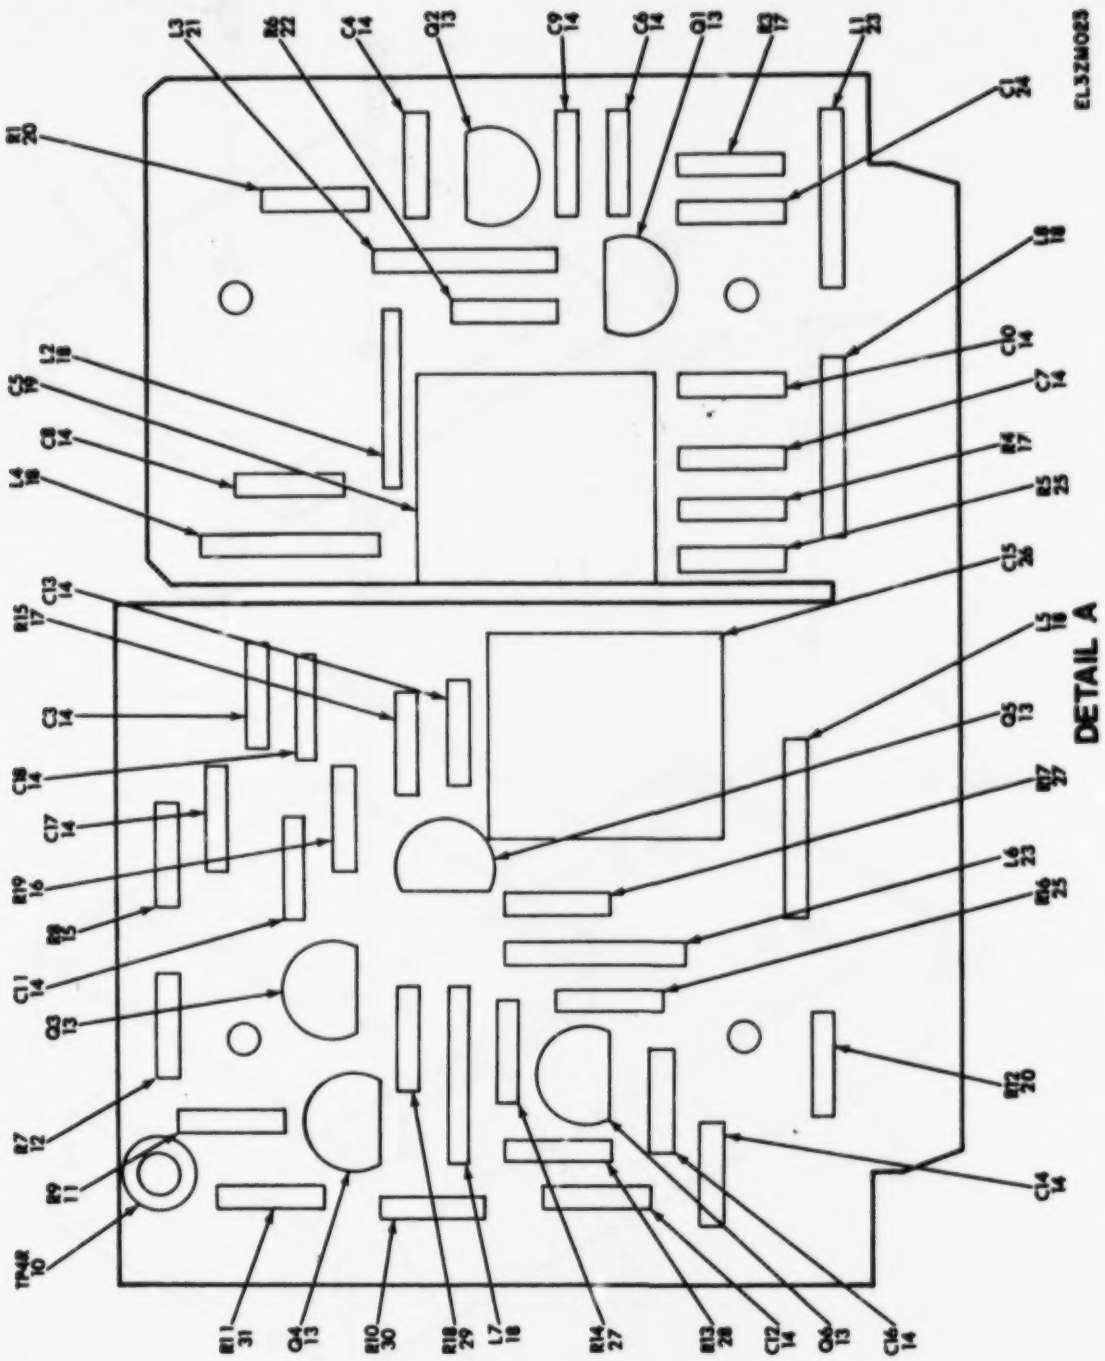

Figure 12. Guard IF Amplifier (Sheet 2 of 2)

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0305 GUARD IF AMPLIFIER		
12	1	PADZZ	5305-00-054-5635	MS51957-1	96906	SCREW,MACHINE	EA	2
12	2	PADZZ	5310-00-928-4690	MS35338-134	96906	WASHER,LOCK	EA	2
12	3	XADZZ		SMC616271	80063	COVER	EA	1
12	4	PADZZ	5305-00-884-1346	NAS662C0-2	80205	SCREW,MACHINE	EA	2
12	5	XDDZZ		SMC616273	80063	SPACER	EA	2
12	6	PADZZ	5365-00-216-1230	SMC596378-16	80063	SHIM	EA	2
12	7	XDDZZ		SMC616272	80063	INSULATOR	EA	1
12	8	XDDZZ		SMC616270	80063	SHIELD	EA	1
12	9	PADZZ	5915-01-077-8461	SM-A-595874-2	80063	FILTER,BANDPASS	EA	1
12	10	PADZZ		2031A4	06245	TERMINAL,STU	EA	1
12	11	PADZZ	5905-00-401-7426	RCR05G272JS	81349	RESISTOR,FIXED,COMP	EA	1
12	12	PADZZ	5905-00-917-5523	RC05GF182J	81349	RESISTOR,FIXED,COMP	EA	1
12	13	PADZZ	5961-00-134-1494	SNA726655	80063	TRANSISTOR	EA	6
12	14	PADZZ	5910-00-168-3466	ML105C103M	04222	CAPACITOR,FIXED	EA	14
12	15	PADZZ	5905-00-951-4082	RC05GF242J	81349	RESISTOR FIXED COMP	EA	1
12	16	PADZZ	5905-00-180-8301	RCR05G101JS	81349	RESISTOR,FIXED,COMP	EA	1
12	17	PADZZ		RC20GF332F	81349	RESISTOR,FIXE	EA	3
12	18	PADZZ	5950-00-711-2692	1025-44	99800	COIL,RADIO FREQUENC	EA	9
12	19	PADZZ	5910-00-176-7322	CM05ED270J03	81349	CAPACITOR,FIXED,MIC	EA	1
12	20	PADZZ		RC05GF562K	81349	RESISTOR,FIXE	EA	2
12	21	PADZZ	5950-00-135-4362	1782-28	99800	COIL,RADIO FREQUENC	EA	1
12	22	PADZZ	5905-00-458-9500	RCR05G102JS	81349	RESISTOR,FIXED,COMP	EA	1
12	23	PADZZ	5950-00-892-8301	1025-12	99800	COIL,RADIO FREQUENC	EA	2
12	24	PADZZ		ML105A331K	04222	CAPACITOR,FIXE	EA	1
12	25	PADZZ	5905-00-761-5758	RCR05G471JS	81349	RESISTOR,FIXED,COMP	EA	2
12	26	PADZZ	5910-00-176-7335	CM05FD121J03	81349	CAPACITOR,FIXED,MIC	EA	1
12	27	PADZZ	5905-01-035-5065	RLR05G103JS	81349	RESISTOR,FIXED,COMP	EA	2
12	28	PADZZ	5905-00-407-0088	RCR05G680JS	81349	RESISTOR,FIXED,COMP	EA	1
12	29	PADZZ		RC05GF331K	81349	RESISTOR,FIXE	EA	1
12	30	PADZZ	5905-00-350-7775	RL05GF220K	81349	RESISTOR,FIXED,COMP	EA	1
12	31	PADZZ	5905-00-180-8319	RCR05G681JS	81349	RESISTOR,FIXED,COMP	EA	1

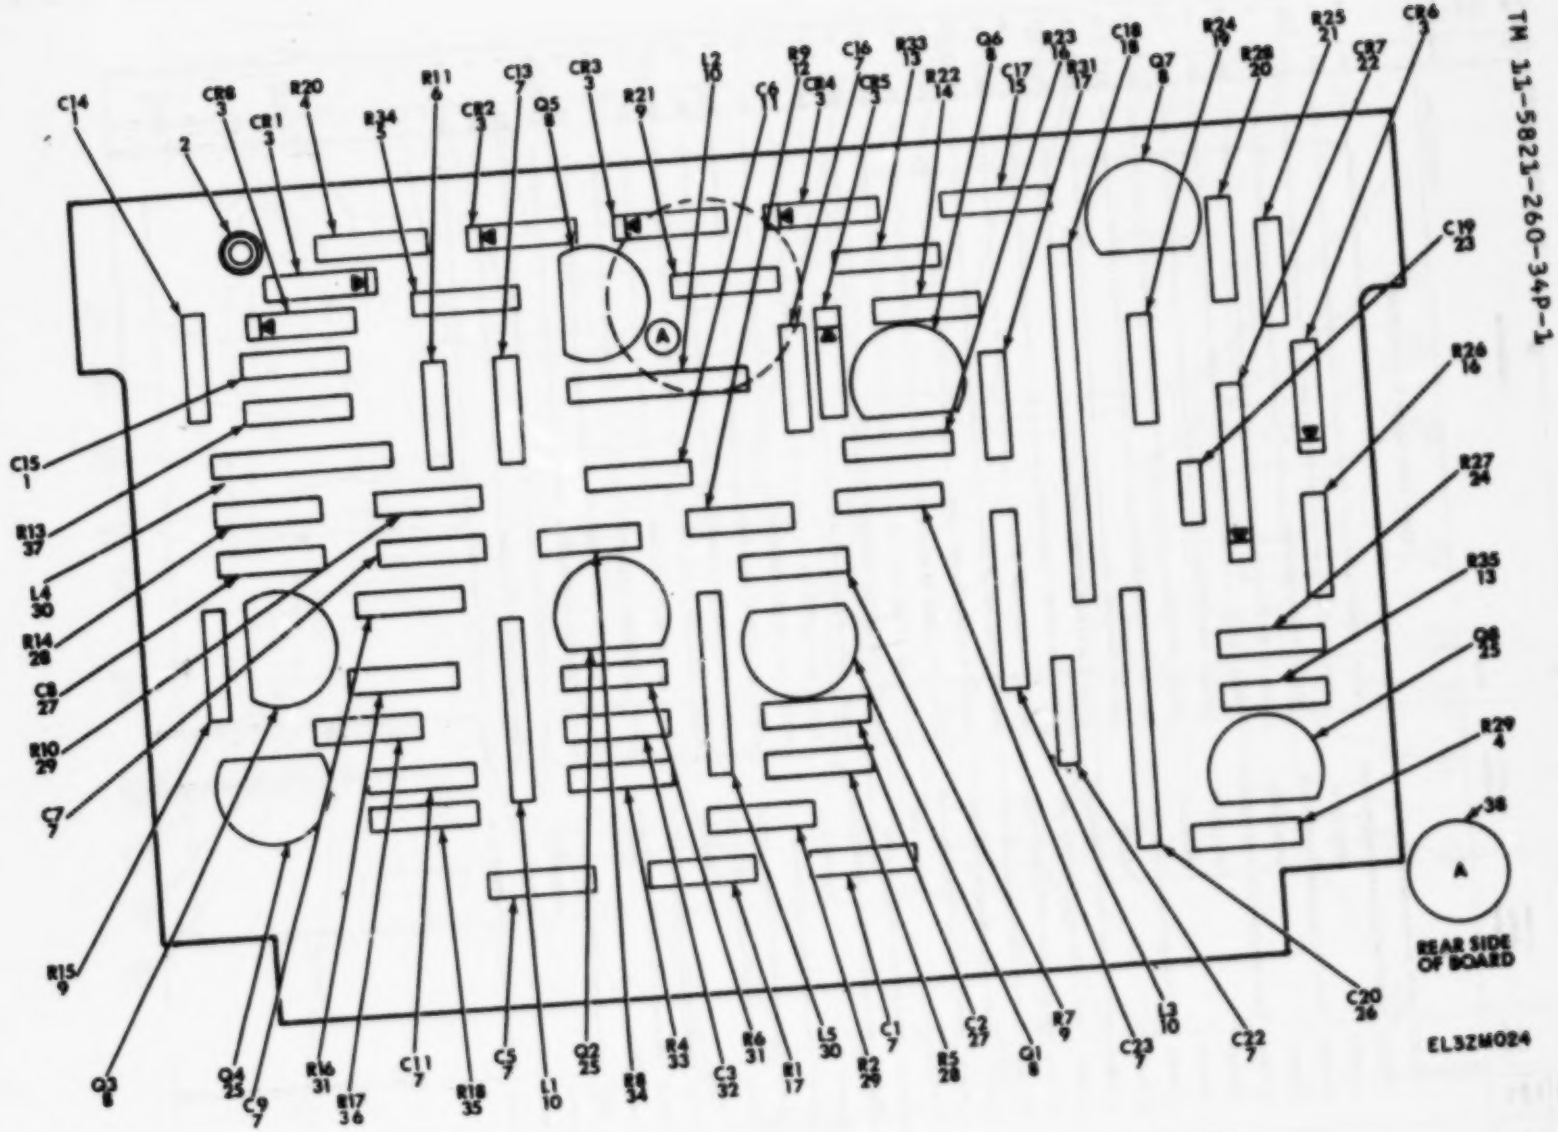

Figure 13. Guard Second IF, Detector and AGC Amplifier Assembly

SECTION II

(1) ILLUSTRATION FIG NO.	(1) ILLUSTRATION ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GALAP 0806 GUARD 2ND IF DETECTOR AND AGC A MPLIFIER		
13	1	PAOZZ	5910-00-483-3712	RL105A220K	04222	CAPACITOR,FIXED,CER	EA	2
13	2	PAOZZ		203164	08245	TERMINAL,STU	EA	1
13	3	PAOZZ	5961-00-441-8882	JAN1N4531	01349	SEMICONDUCTOR DEVIC	EA	7
13	4	PAOZZ		RC05GF333K	01349	RESISTOR,FIXED,COMP	EA	2
13	5	PAOZZ		RC05GF104K	01349	RESISTOR,FIXED	EA	1
13	6	PAOZZ	5905-00-401-3426	RCR05G274J5	01349	RESISTOR,FIXED,COMP	EA	1
13	7	PAOZZ	5910-00-168-3466	ML105C103M	04222	CAPACITOR,FIXED	EA	9
13	8	PAOZZ	5961-00-144-5245	SRA726658	80063	TRANSISTOR	EA	5
13	9	PAOZZ	5905-00-401-7424	RCR05G222J5	01349	RESISTOR,FIXED,COMP	EA	3
13	10	PAOZZ	5950-00-711-2892	1029-44	99800	COIL,RADIO FREQUENC	EA	3
13	11	PAOZZ		ML105B222M	04222	CAPACITOR,FIXED	EA	1
13	12	PAOZZ		RC05GF122K	01349	RESISTOR,FIXED	EA	1
13	13	PAOZZ	5905-00-781-5758	RCR05G471J5	01349	RESISTOR,FIXED,COMP	EA	2
13	14	PAOZZ		RC05GF683K	01349	RESISTOR,FIXED	EA	1
13	15	PAOZZ		ML105B102M	04222	CAPACITOR,FIXED	EA	1
13	16	PAOZZ	5905-00-458-9500	RCR05G102J5	01349	RESISTOR,FIXED,COMP	EA	2
13	17	PAOZZ		RC05GF332K	01349	RESISTOR,FIXED	EA	4
13	18	PAOZZ	5910-00-432-5448	MC6055/2-0094	01349	CAPACITOR,FIXED	EA	1
13	19	PAOZZ	5905-00-998-2393	RC05GF432J	01349	RESISTOR,FIXED,COMP	EA	1
13	20	PAOZZ		RL05GF223K	01349	RESISTOR,FIXED,COMP	EA	1
13	21	PAOZZ	5905-00-947-5522	RC05GF202J	01349	RESISTOR	EA	1
13	22	PAOZZ	5961-00-932-4026	1N4736A	80131	SEMICONDUCTOR DEVIC	EA	1
13	23	PAOZZ	5910-00-058-4864	ULA5U5C104MA	96095	CAPACITOR,FIXED,CER	EA	1
13	24	PAOZZ		RC05GF273K	01349	RESISTOR,FIXED	EA	3
13	25	PAOZZ	5961-00-134-1494	SRA726655	80063	TRANSISTOR	EA	1
13	26	PAOZZ	5910-00-007-2002	CSL3BL425M	01349	CAPACITOR,FIXED,CER	EA	2
13	27	PAOZZ	5910-00-201-7126	ML105A150K	04222	CAPACITOR,FIXED,CER	EA	2
13	28	PAOZZ	5905-00-409-2975	RCR05G820J5	01349	RESISTOR,FIXED,COMP	EA	2
13	29	PAOZZ		RL05GF153K	01349	RESISTOR,FIXED,COMP	EA	2
13	30	PAOZZ	5950-00-902-2379	1029-52	99800	COIL,RADIO FREQUENC	EA	2
13	31	PAOZZ	5905-00-180-8303	RCR05G152J5	01349	RESISTOR,FIXED,COMP	EA	1
13	32	PAOZZ		ML105C472M	04222	CAPACITOR,FIXED	EA	1
13	33	PAOZZ	5905-00-180-8315	RCR05G681J5	01349	RESISTOR,FIXED,COMP	EA	1
13	34	PAOZZ	5905-00-180-8301	RCR05G101J5	01349	RESISTOR,FIXED,COMP (SELECT-AT-TEST)	EA	A
13	35	PAOZZ		RC05GF332K	01349	RESISTOR,FIXED (SELECT-AT-TEST)	EA	1
13	36	PAOZZ		RC05GF470K	01349	RESISTOR,FIXED (SELECT-AT-TEST)	EA	1
13	37	PAOZZ	5905-00-407-0088	RCR05G680J5	01349	RESISTOR,FIXED,COMP (SELECT-AT-TEST)	EA	1
13	38	PAOZZ	5905-00-470-0369	RLR05G151J5	01349	RESISTOR,FIXED,COMP (SELECT-AT-TEST)	EA	1

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
13	34	PADZZ	5905-00-350-7775	RC05GF221K	81349	RESISTOR,FIXED,COMP (SELECT-AT-TEST).....	EA	1
13	35	PADZZ		RC05GF391K	81349	RESISTOR,FIXE.....	EA	1
13	36	PADZZ		RC05GF151K		RESISTOR,FIXED,COMP.....	EA	1
13	37	PADZZ	5905-00-401-7425	RCR05G271JS	81349	RESISTOR,FIXED,COMP.....	EA	1
13	38	XDDZZ		SHA88Z655	80063	PAD,VIBRATION.....	EA	1

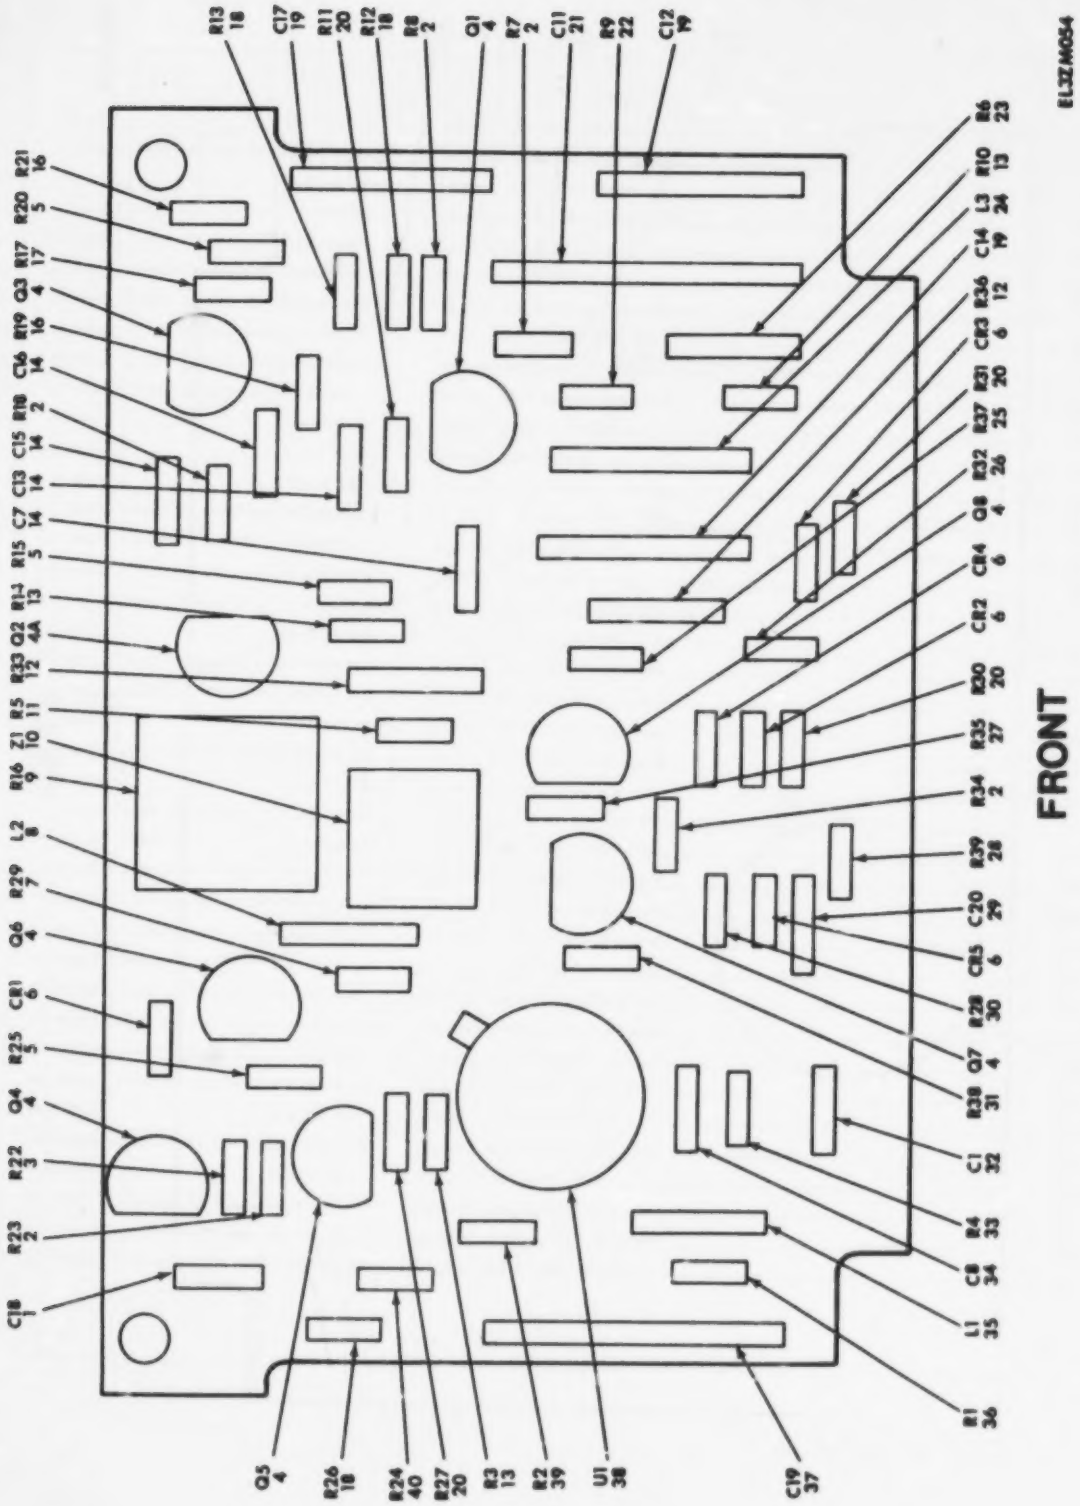

Figure 14. Guard Squelch Circuit (Sheet 1 of 2)

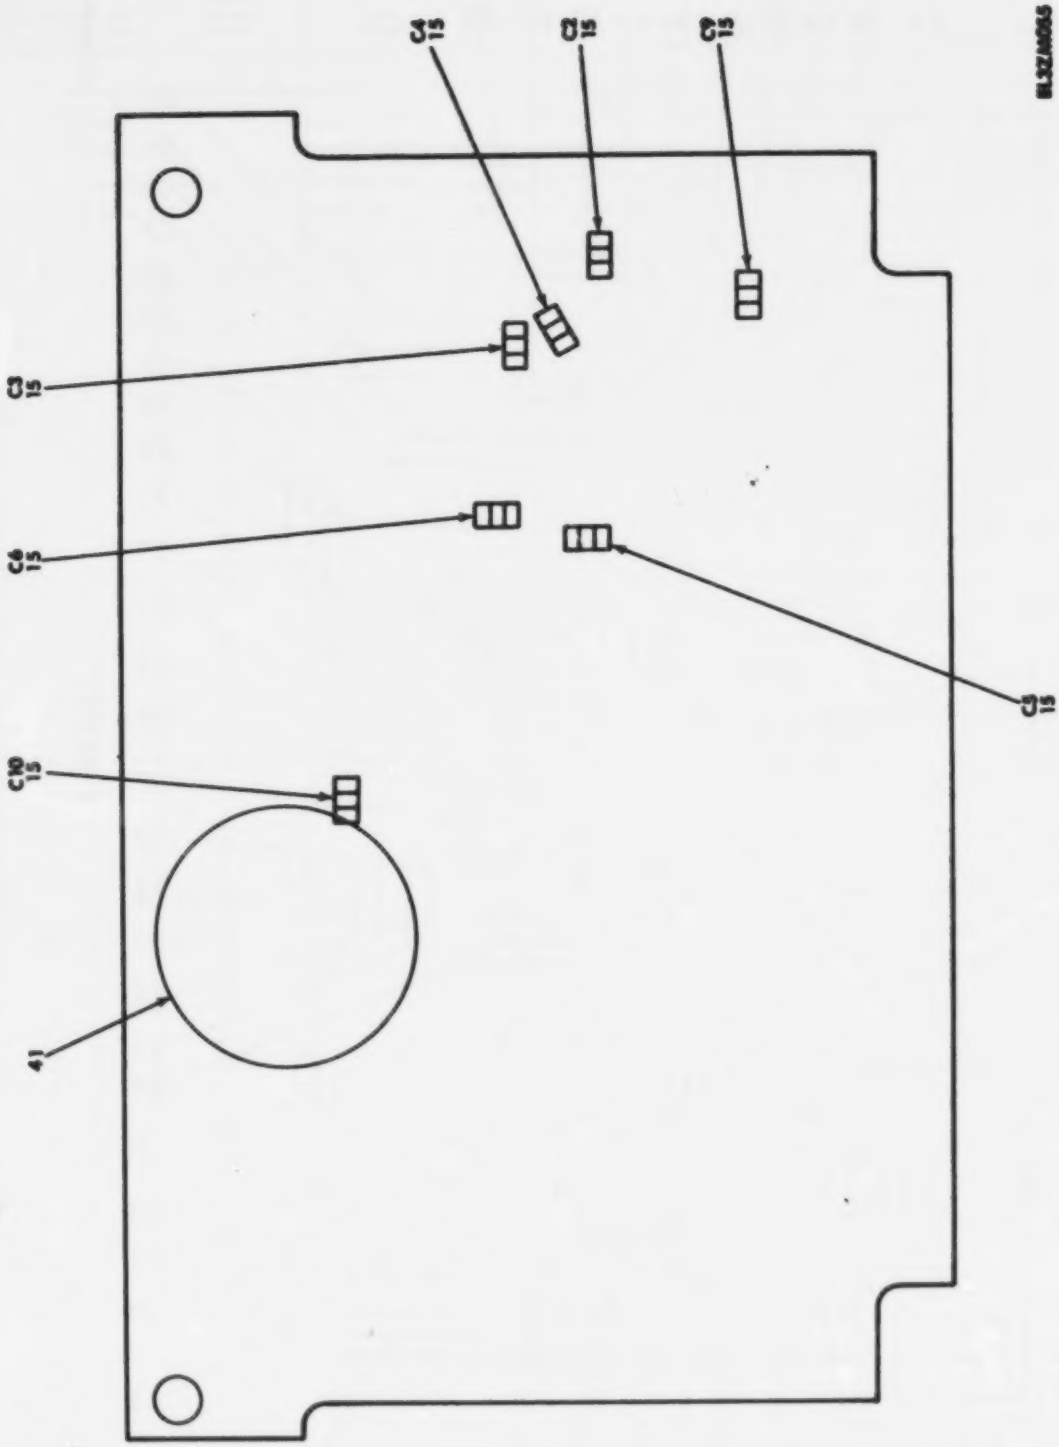

Figure 14. Guard Squelch Circuit (Sheet 2 of 2)

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0307 GUARD SQUELCH CIRCUIT		
14	1	PADZZ		ML109B332K	04222	CAP FXD CER DIEL	EA	1
14	2	PADZZ	5905-00-412-0760	RCR05G563JS	81349	RESISTOR,FIXED,COMP	EA	5
14	3	PADZZ		RCR05G183KS	81349	RES FIXED COMP	EA	1
14	4	PADZZ	5999-01-077-8602	SM-D-882661	80063	PRINTED WIRING BOAR	EA	1
14	4	PADZZ	5961-00-134-1494	SMA726655	80063	TRANSISTOR	EA	7
14	44	PADZZ	5961-00-174-5265	SMA726658	80063	TRANSISTOR	EA	1
14	5	PADZZ	5905-00-188-8301	RCR05G101JS	81349	RESISTOR,FIXED,COMP	EA	3
14	6	PADZZ	5961-00-421-8882	JAN1N4531	81349	SEMICONDUCTOR DEVIC	EA	5
14	7	PADZZ	5905-00-231-2917	RCR05G432JS	81349	RESISTOR,FIXED,COMP	EA	1
14	8	PADZZ	5950-00-802-2375	1025-52	99800	COIL,RADIO FREQUENC	EA	1
14	9	PADZZ		700-10-2K	74902	RESISTOR,VARIABLE,W	EA	1
14	10	PADZZ		418-134-04	06978	COIL,RADIO	EA	1
14	11	XADDD		RCR05G102KS	81349	RESISTOR,FIXED,COMP	EA	1
14	12	PADZZ	5905-00-247-2349	RCR07G152KS	81349	RESISTOR FIXED COMP	EA	2
14	13	PADZZ	5905-00-401-7427	RCR05G332JS	81349	RESISTOR,FIXED,COMP	EA	3
14	14	PADZZ	5910-00-169-3466	ML105C104M	04222	CAPACITOR,FIXED	EA	4
14	15	XBDZZ	5910-00-159-6861	CDR01BX332BKSM	81349	CAPACITOR,FIXED,CER	EA	7
14	16	PADZZ		RCR05G272KS	81349	RES FIXED COMP	EA	2
14	17	PADZZ	5905-00-466-1217	RCR05G683JS	81349	RESISTOR,FIXED,COMP	EA	1
14	18	PADZZ	5905-00-458-9346	RCR05G104KS	81349	RESISTOR,FIXED,COMP	EA	3
14	19	PADZZ		M26655-2-0086	81349	CAPACITOR,FIXE	EA	3
14	20	PADZZ	5905-00-689-1290	RCR05G512JS	8134	RESISTOR,FIXED,COMP	EA	4
14	21	PADZZ		M26655-2-0174	81349	CAPACITOR,FIXE	EA	1
14	22	PADZZ	5905-00-478-0369	RCR05G151JS	81349	RESISTOR,FIXED,COMP	EA	1
14	23	PADZZ	5905-00-141-1131	RCR07G010JS	81349	RESISTOR,FIXED,COMP	EA	1
14	24	PADZZ	5950-01-007-6576	DR-10,000	24759	COIL,RADIO FREQUENC	EA	1
14	25	PADZZ	5905-00-761-5758	RCR05G471JS	81349	RESISTOR,FIXED,COMP	EA	1
14	26	PADZZ	5905-00-177-7486	RCR05G221JS	81349	RESISTOR,FIXED,COMP	EA	1
14	27	PADZZ	5905-00-403-8837	RCR05G223JS	81349	RESISTOR,FIXED,COMP	EA	1
14	28	PADZZ	5905-00-617-5096	RCR05G682JS	81349	RESISTOR,FIXED,COMP	EA	1
14	29	PADZZ	5910-00-034-4864	ULA505C104KM	96905	CAPACITOR,FIXED,CER	EA	1
14	30	PADZZ	5905-00-411-1851	RLR05G562JS	81349	RESISTOR,FIXED,COMP	EA	1
14	31	PADZZ	5905-00-466-1215	RCR05G123JS	81349	RESISTOR,FIXED,COMP	EA	1
14	32	PADZZ		ML109B102M	04222	CAPACITOR,FIXE	EA	1
14	33	PADZZ	5905-00-492-7607	RCR05G103KS	81349	RESISTOR,FIXED,COMP	EA	1
14	34	PADZZ		ML109A561K	04222	CAPACITOR,FIXE	EA	1
14	35	PADZZ	5950-00-711-2692	1025-44	99800	COIL,RADIO FREQUENC	EA	1
14	36	PADZZ	5905-00-407-0082	RLR05G182JS	81349	RESISTOR,FIXED,COMP	EA	1
14	37	PADZZ	5910-00-433-5446	M26655/2-0094	81349	CAPACITOR FIXED	EA	1

SECTION II

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
14	38	PADZZ		86965A	80684	MICROCIRCUIT,LIN	EA	1
14	39	PADZZ	5905-00-197-0223	RCR05G750JS	81349	RESISTOR,FIXED,COMP	EA	1
14	40	PADZZ	5905-00-180-8313	RCR05G243JS	81349	RESISTOR,FIXED,COMP	EA	1
14	41	XDDZZ		SMA82655	80063	PAD VIBRATION	EA	1

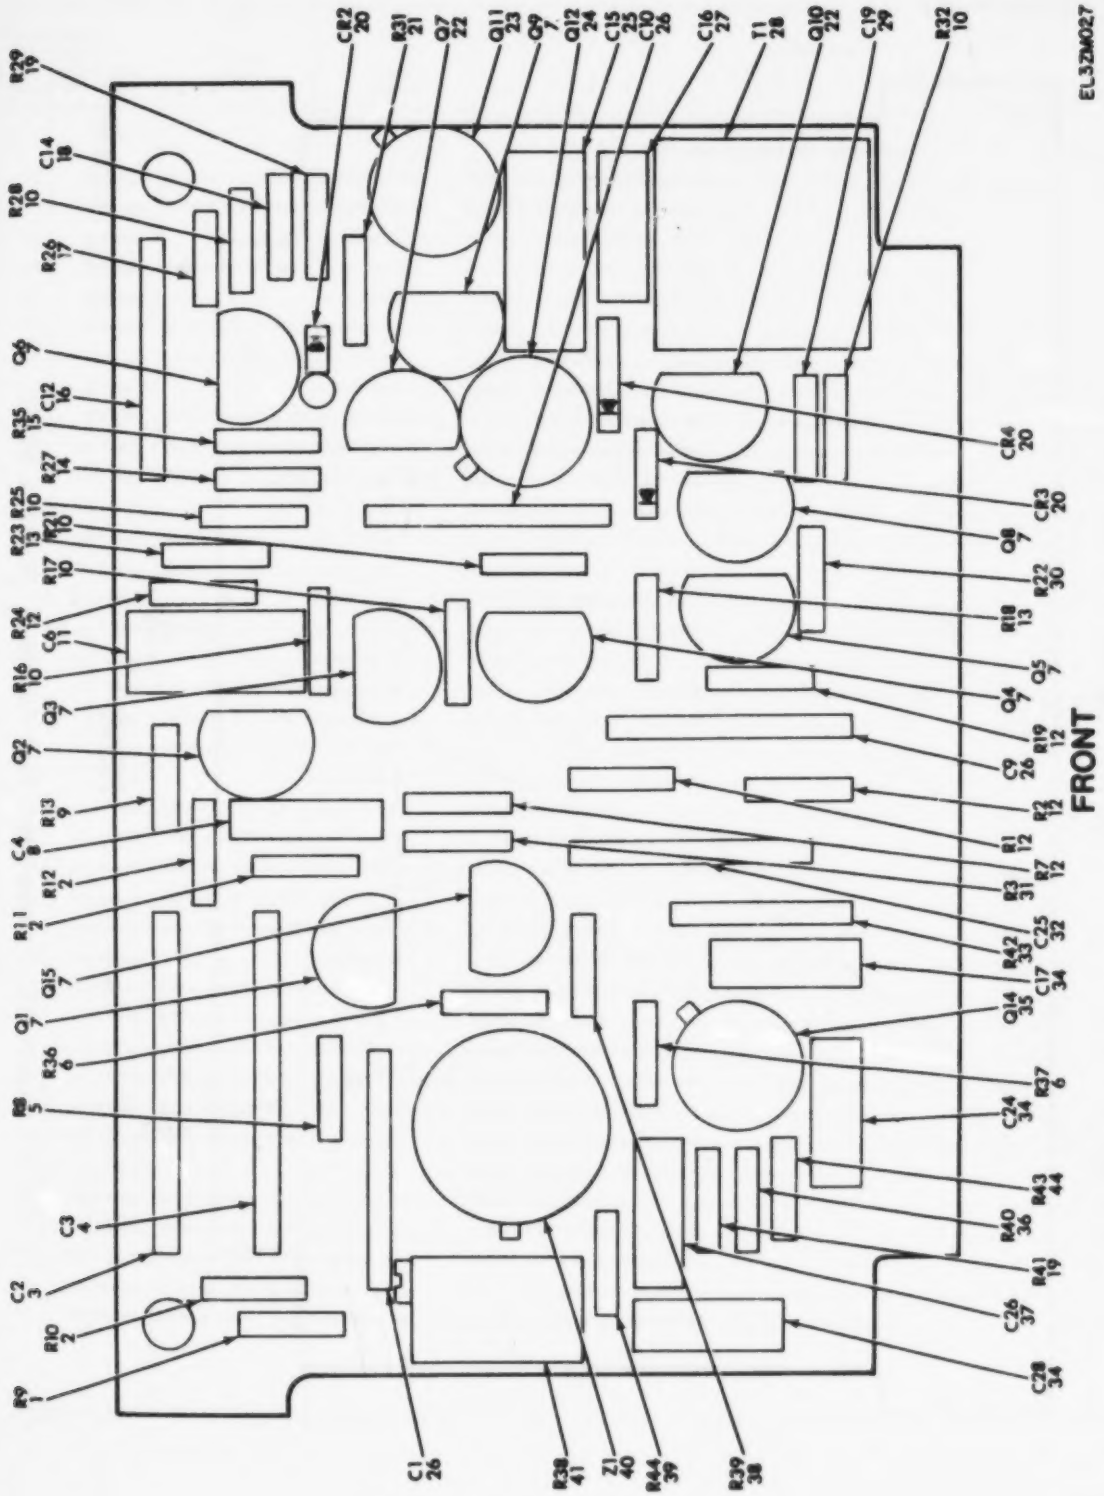

Figure 15. Audio Amplifier Assembly (Sheet 1 of 2)

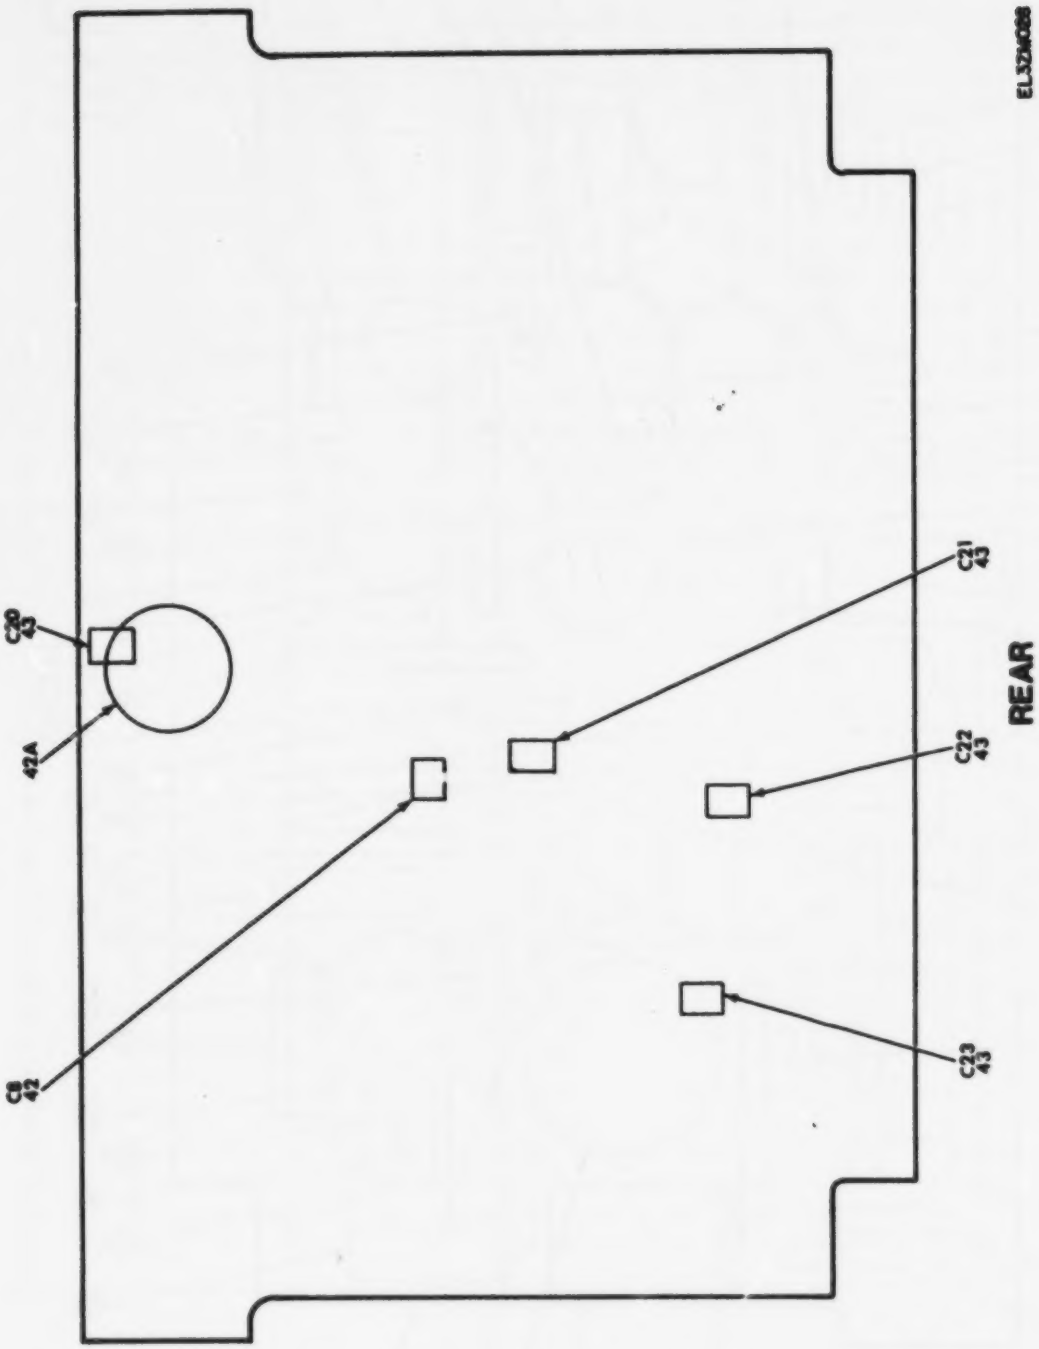

Figure 15. Audio Amplifier Assembly (Sheet 2 of 2)

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0308 AUDIO AMPLIFIER ASSEMBLY		
15	1	PADZZ	5905-00-006-6975	RLR05C1102GR	81349	RESISTOR,FIXED,FILM	EA	1
15	2	PADZZ	5905-00-012-0329	RLR05C1202GR	81349	RESISTOR,FIXED,FILM	EA	3
15	3	PADZZ		SY15-2232100	84411	CAPACITOR,FIXE	EA	1
15	4	PADZZ	5910-00-206-0362	SY15-2432100	84411	CAPACITOR,FIXED,PLA	EA	1
15	5	PADZZ		RC05GF332K	81349	RESISTOR,FIXE	EA	1
15	6	PADZZ	5905-00-915-0981	RC05GF393J	81349	RESISTOR,FIXED,COMP	EA	2
15	7	PADZZ	5961-00-134-1496	SMA726655	80063	TRANSISTOR	EA	9
15	8	PADZZ		LY07C681G	16299	CAPACITOR,FIXE	EA	1
15	9	PADZZ	5905-00-687-0089	RCR05G753JS	81349	RESISTOR,FIXED,COMP	EA	1
15	10	PADZZ	5905-01-035-5065	RCR05G103JS	81349	RESISTOR,FIXED,COMP	EA	1
15	11	PADZZ	5910-00-911-5906	T356C106K025AS	05397	CAPACITOR,FIXED,ELE	EA	6
15	12	PADZZ		RC05GF153K	81349	RESISTOR,FIXED,COMP	EA	1
15	13	PADZZ		RC05GF104K	81349	RESISTOR,FIXE	EA	5
15	14	PADZZ	5905-00-180-8301	RCR05G101JS	81349	RESISTOR,FIXED,COMP	EA	2
15	15	PADZZ		RC05GF683K	81349	RESISTOR,FIXE	EA	1
15	16	PADZZ	5910-01-060-6627	SMA693009-103	80063	CAPACITOR,FIXED,CER	EA	1
15	17	PADZZ		RC05GF391K	81349	RESISTOR,FIXE	EA	1
15	18	PADZZ	5910-00-206-0287	ML105A121K	04222	CAPACITOR,FIXED,CER	EA	1
15	19	PADZZ	5905-00-948-7266	RC05GF563J	81349	RESISTOR,FIXED,COMP	EA	2
15	20	PADZZ	5961-00-421-8882	JAN1N4531	81349	SEMICONDUCTOR DEVIC	EA	3
15	21	PADZZ		RC05GF472K	81349	RESISTOR,FIXE	EA	1
15	22	PADZZ	5961-00-124-5245	SMA726658	80063	TRANSISTOR	EA	2
15	23	PADZZ	5961-00-911-6015	JAN2N3251A	81349	TRANSISTOR	EA	1
15	24	PADZZ	5961-01-058-7785	SM-A-726664	80063	TRANSISTOR	EA	1
15	25	PADZZ	5910-00-771-0183	X22P15	05397	CAPACITOR,FIXED,ELE	EA	1
15	26	PADZZ	5910-00-460-0850	CSR13G105MM	81349	CAPACITOR	EA	3
15	27	PADZZ		EL50RC334M	20932	CAPACITOR,MULDE	EA	1
15	28	PADZZ	5950-00-206-0392	3170173	06978	TRANSFORMER,AUDIO F	EA	1
15	29	PADZZ	5910-00-936-0530	ML105C103K	04222	CAPACITOR,FIXED,CER	EA	1
15	30	PADZZ	5905-00-670-9480	RCR05G132JS	81349	RESISTOR,FIXED,COMP	EA	1
15	31	PADZZ	5905-00-915-0979	RC05GF163J	81349	RESISTOR FIXED COMP	EA	1
15	32	PADZZ	5910-00-513-0972	M39003-02-0213	81349	CAPACITOR,FIXED,ELE	EA	1
15	33	PADZZ	5905-00-686-8994	RC07GF122J	81349	RESISTOR,FIXED,COMP	EA	1
15	34	PADZZ		EL50RC474M	20932	CAPACITOR,MOLDE	EA	3
15	35	PADZZ	5961-01-077-8570	SM-A-882568	80063	TRANSISTOR	EA	1
15	36	PADZZ	5905-00-952-5194	RC05GF273J	81349	RESISTOR,FIXED,COMP	EA	1
15	37	PADZZ	5910-01-060-6627	MC602A103J	96095	CAPACITOR,FIXED,CER	EA	1
15	38	PADZZ	5905-01-008-0396	RLR05C102GM	81349	RESISTOR,FIXED,FILM	EA	1
15	39	PADZZ	5905-00-433-6483	RCR05G392JS	81349	RESISTOR,FIXED,COMP	EA	1

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
15	40	PAOZZ		M38510/10106BGC	01349	MICROCIRCUIT,LINEAR	EA	1
15	41	PAOZZ	5905-01-060-6626	850-20	75042	RESISTOR,VARIABLE,N	EA	1
15	42	PAOZZ	5910-01-031-8031	ULA105C102M	04222	CAPACITOR,FIXED,CER	EA	1
15	42A	XOOZZ		SMA082695	80063	PAD,VIBRATION	EA	1
15	43	PAOZZ	5910-01-026-4802	ULA105A101K	96095	CAPACITOR,FIXED,CER	EA	4
15	44	PAOZZ		RC05GF470K	81349	RESISTOR,FIXE	EA	1

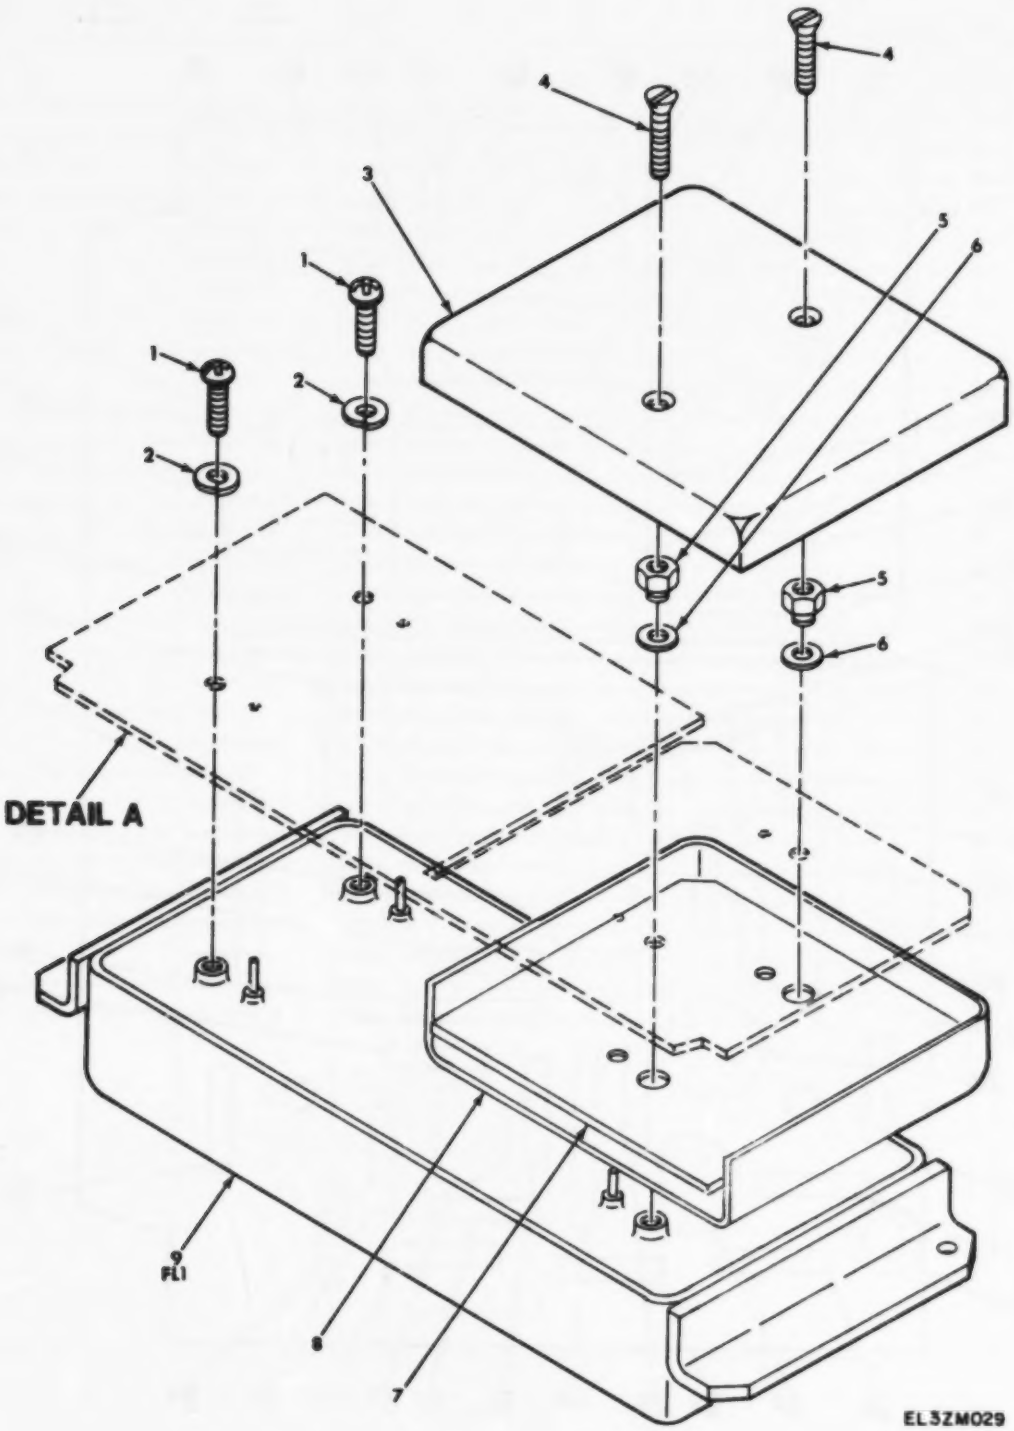

Figure 16. Main IF Amplifier Assembly (Sheet 1 of 2)

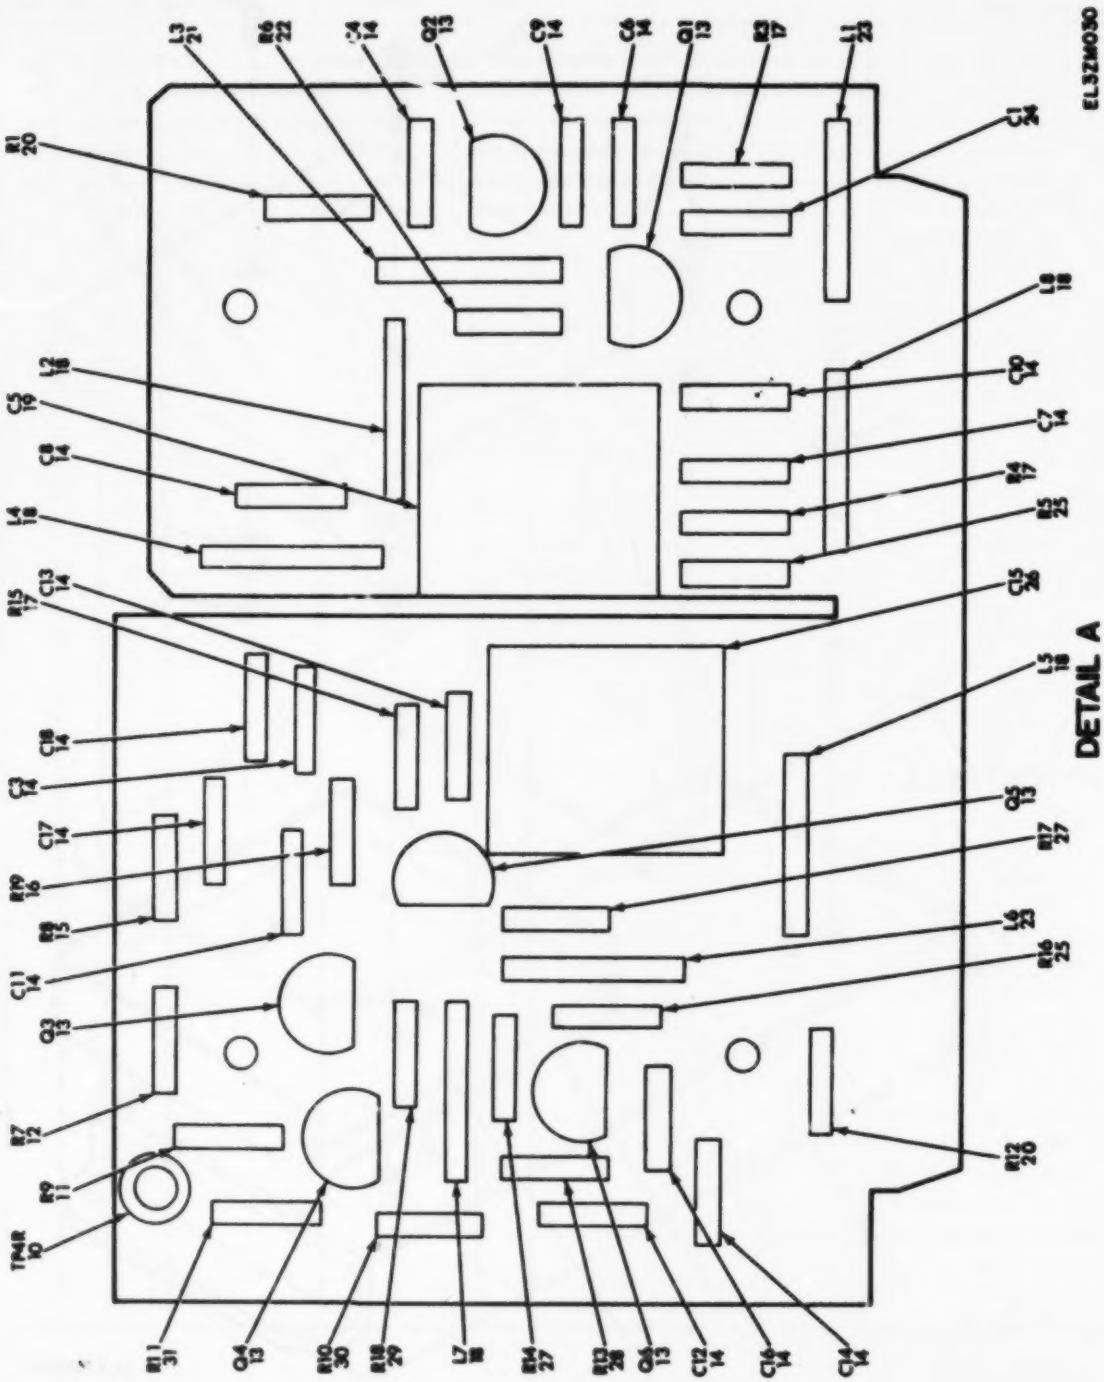

Figure 16. Main IF Amplifier Assembly (Sheet 2 of 2)

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0311 MAIN IF AMPLIFIER		
16	1	PAFZZ	5305-00-054-5635	MS51957-1	96906	SCREW,MACHINE	EA	2
16	2	PAFZZ	5310-00-928-2690	MS35338-134	96906	WASHER,LOCK	EA	2
16	3	XADZZ		SMC618271	80063	COVER	EA	1
16	4	PADZZ	5305-00-884-1366	NAS662C0-2	80205	SCREW,MACHINE	EA	2
16	5	XDDZZ		SMC618273	80063	SPACER	EA	2
16	6	XDDZZ		SMC596378-16	80063	SHIM	EA	2
16	7	XDDZZ		SMC618272	80063	INSULATOR	EA	1
16	8	XDDZZ		SMC618270	80063	SHIELD	EA	1
16	9	PADZZ	5915-01-077-8462	SM-A-595874-4	80063	FILTER,BANDPAS	EA	1
16	10	PAUZZ		2931A4	88245	TERMINAL,STU	EA	1
16	11	PADZZ	5905-00-401-7426	RCR05G272J5	81349	RESISTOR,FIXED,COMP	EA	1
16	12	PADZZ	5905-00-917-5523	RC05GF182J	81349	RESISTOR,FIXED,COMP	EA	1
16	13	PADZZ	5961-00-134-1494	SMAT26655	80063	TRANSISTOR	EA	6
16	14	PADZZ	5910-00-168-3466	ML105C103M	04222	CAPACITOR,FIXED	EA	14
16	15	PADZZ	5905-00-951-4682	RC05GF242J	81349	RESISTOR FIXED COMP	EA	1
16	16	PADZZ	5905-00-180-8301	RCR05G101J5	81349	RESISTOR,FIXED,COMP	EA	1
16	17	PADZZ		RL05GF332K	81349	RESISTOR,FIXE	EA	3
16	18	PADZZ	5950-00-711-2692	1025-44	99800	COIL,RADIO FREQUENC	EA	5
16	19	PADZZ	5910-00-176-7322	CM05ED270J03	81349	CAPACITOR,FIXED,MIC	EA	1
16	20	PADZZ		RC05GF562K	81349	RESISTOR,FIXE	EA	2
16	21	PADZZ	5950-00-135-4362	1782-28	99800	COIL,RADIO FREQUENC	EA	1
16	22	PADZZ	5905-00-458-9560	RCR05G102J5	81349	RESISTOR,FIXED,COMP	EA	1
16	23	PADZZ	5950-00-892-8301	1025-12	99800	COIL,RADIO FREQUENC	EA	2
16	24	PADZZ		ML105A331K	04222	CAPACITOR,FIXE	EA	1
16	25	PADZZ	5905-00-761-5758	RCR05G471J5	81349	RESISTOR,FIXED,COMP	EA	2
16	26	PADZZ	5910-00-176-7335	CM05FD121J03	81349	CAPACITOR,FIXED,MIC	EA	1
16	27	PADZZ	5905-01-035-5065	RCR05G103J5	81349	RESISTOR,FIXED,COMP	EA	2
16	28	PADZZ	5905-00-407-0088	RCR05G680J5	81349	RESISTOR,FIXED,COMP	EA	1
16	29	PAUZZ		RC05GF331K	81349	RESISTOR,FIXE	EA	1
16	30	PADZZ	5905-00-350-7775	RC05GF220K	81349	RESISTOR,FIXED,COMP	EA	1
16	31	PADZZ	5905-00-180-8315	RCR05G681J5	81349	RESISTOR,FIXED,COMP	EA	1

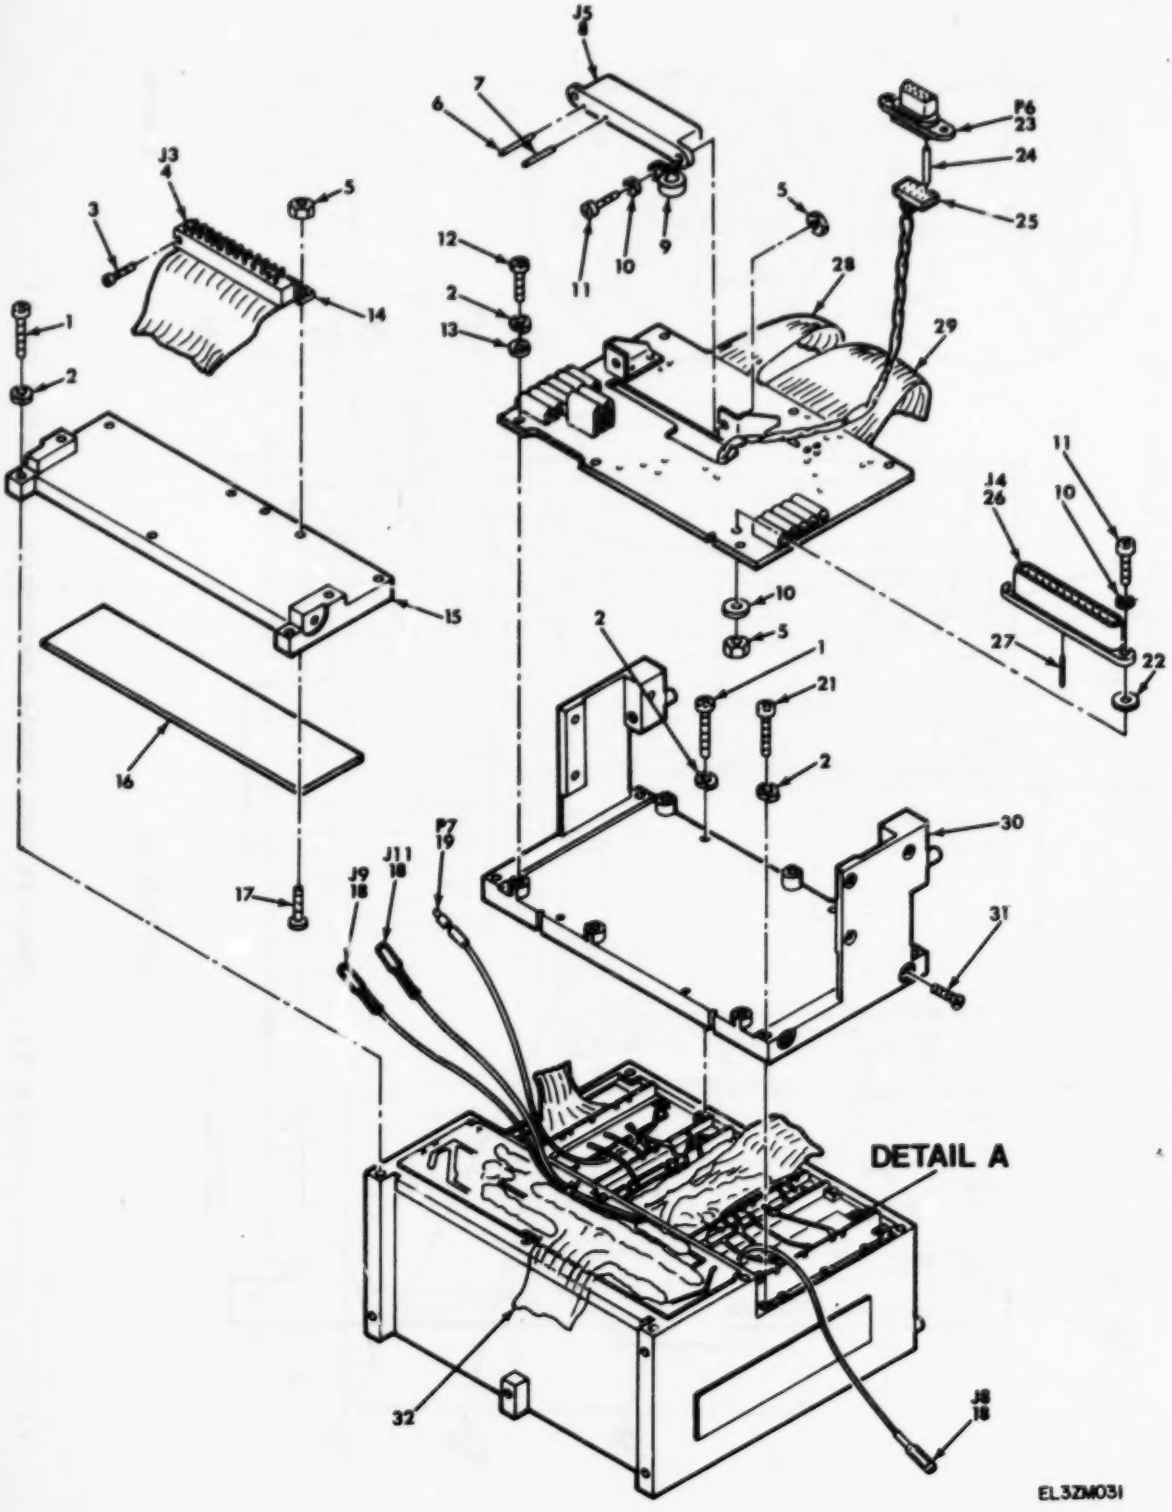

Figure 17. Chassis and Cable Assembly (Sheet 1 of 4)

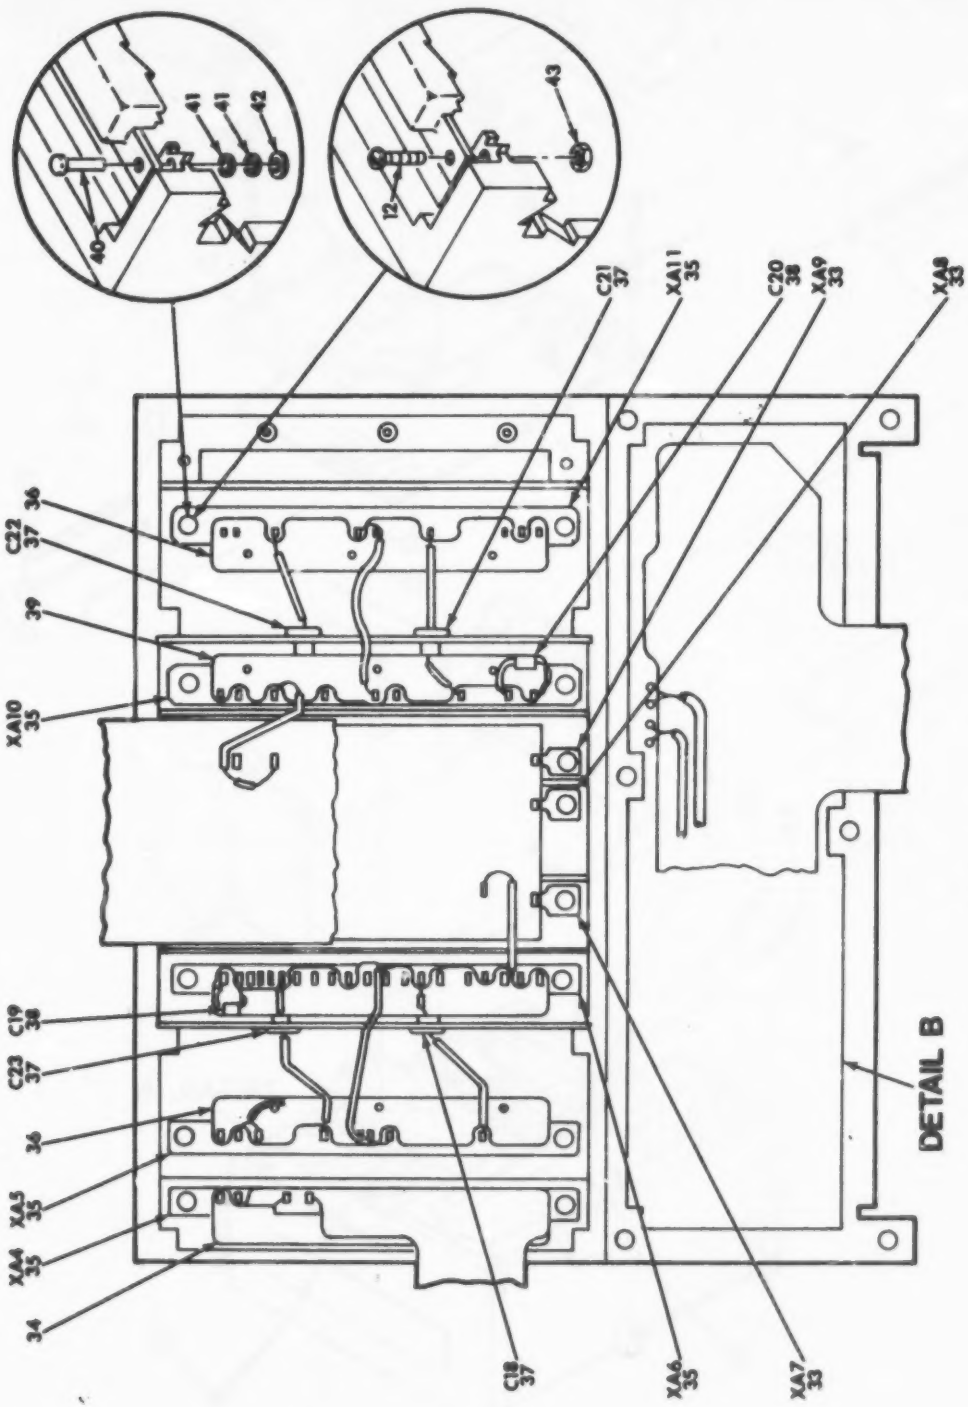

Figure 17. Chassis and Cable Assembly (Sheet 2 of 4)

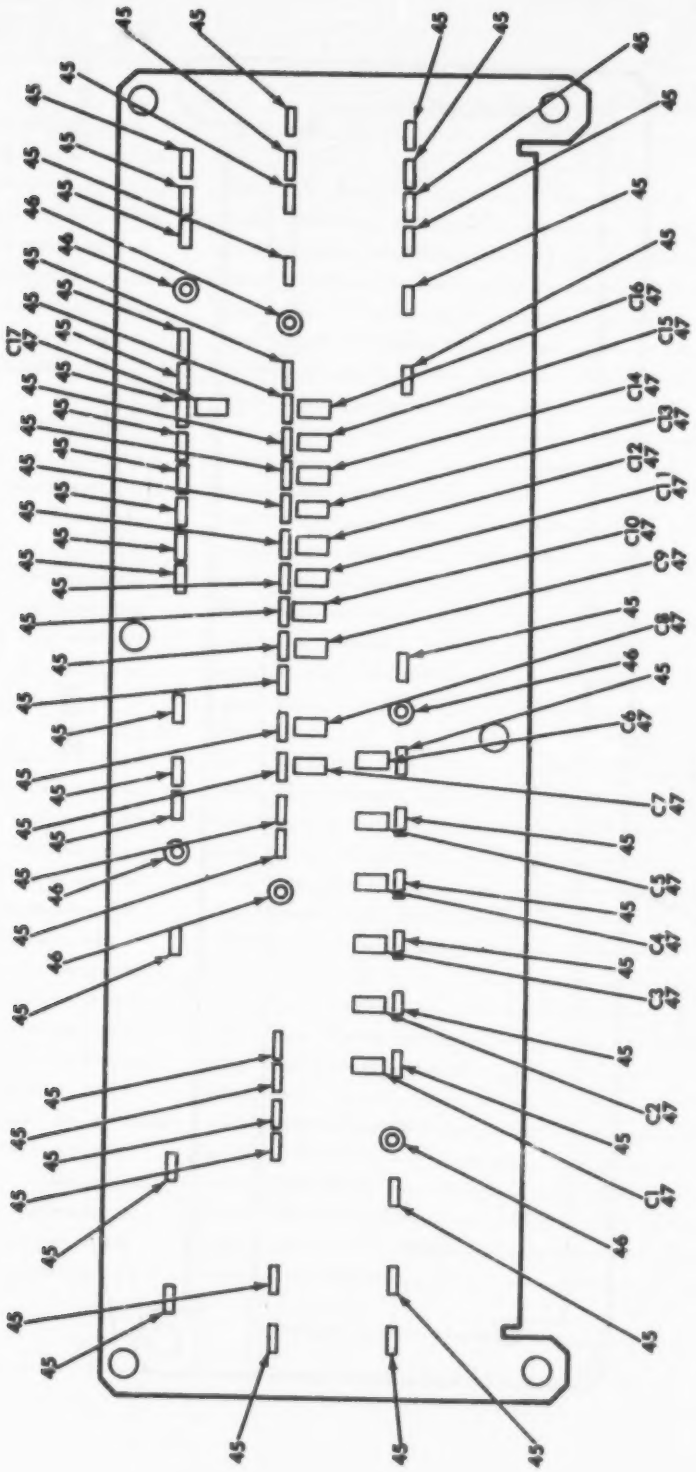

Figure 17. Chassis and Cable Assembly (Sheet 3 of 4)

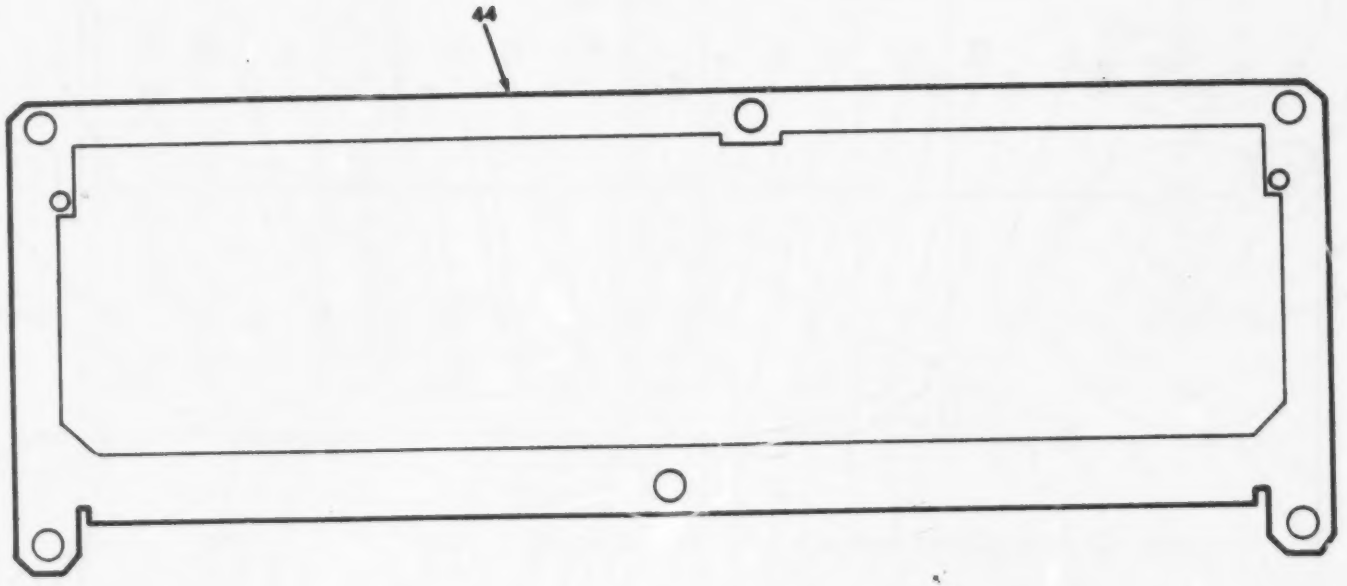

Figure 17. Chassis and Cable Assembly (Sheet 4 of 4)

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0312 CHASSIS AND CABLE ASSEMBLY		
17	1	PADZZ	5305-00-054-5640	MS51957-6	96906	SCREW,MACHINE	EA	10
17	2	PAUZZ	5310-00-928-2690	MS35338-134	96906	WASHER,LOCK	EA	20
17	3	PADZZ	5320-00-168-7323	SMB595946-10	80063	RIVET,TUBULAR	EA	2
17	4	PADZZ	5935-00-134-5355	SMA617902-3	80063	CONNECTOR,RECEPTACL	EA	1
17	5	PADZZ	5310-00-880-7010	MS21042L02	96906	NUT,SELF-LOCKING,EX	EA	4
17	6	PADZZ	5999-00-463-3168	220-844-02	02660	CONTACT,ELECTRICAL	EA	6
17	7	PADZA	5999-00-168-4022	220-834-04	02660	CONTACT,ELECTRICAL	EA	31
17	8	PADZZ	5935-00-419-5417	223-698	29587	CONNECTOR BODY,RECE	EA	1
17	9	XDDZZ	5340-00-245-4820	1-8JNA	95987	CLAMP,LOOP	EA	1
17	10	XDDZZ		SMC617837-7	80063	WASHER,FLAT	EA	8
17	11	PADZZ	5305-00-054-5639	MS51957-5	96906	SCREW,MACHINE	EA	4
17	12	PADZZ	5305-00-054-5637	MS51957-3	96906	SCREW,MACHINE	EA	22
17	13	PADZZ	5310-00-595-6761	MS15795-802	96906	WASHER,FLAT	EA	6
17	14	XDDZZ		SMC618094	80063	BRACKET,CONNECTOR	EA	1
17	15	XADZZ		SMB618201	80063	CTRICAL EQUIPMENT	EA	1
17	16	PADZZ	5970-00-168-4271	SMC692753	80063	INSULATOR,PLATE	EA	1
17	17	PADZZ	5305-00-727-8833	MS51959-3	96906	SCREW,MACHINE	EA	2
17	18	PADZZ	5995-00-054-8848	SMA597837-2	80063	CABLE ASSEMBLY,RADI	EA	3
17	19	PADZZ	5821-00-724-1691	SMD618286	80063	PRINTED CABLE ASSEM	EA	1
17	21	PADZZ	5305-00-054-5641	MS51957-7	96906	SCREW,MACHINE	EA	4
17	22	XDDZZ		SMC596378-18	80063	WASHER,FLAT	EA	2
17	23	PADZZ	5935-00-763-0858	223-1109	29587	CONNECTOR BODY,RECE	EA	1
17	24	PAUZA	5999-00-497-9274	220-845-02	02660	CONTACT,ELECTRICAL	EA	7
17	25	PADZZ	5935-00-168-7997	SM-C-632345	80063	SUPPORT,CONNECTOR	EA	1
17	26	PAUZZ	5935-00-134-5337	223-1233	02660	CONNECTOR BODY,RECE	EA	1
17	27	PAUZA	5999-00-168-4021	220-871-02	02660	CONTACT,ELECTRICAL	EA	31
17	28	PADZZ	5995-01-060-6735	SMD658095	80063	PRINTED CABLE ASSEM	EA	1
17	29	PADZZ	5995-01-060-6736	SMC658097	80063	PRINTED CABLE ASSEM	EA	1
17	30	PADZZ	5821-00-177-3511	SMB618203	80063	COVER,RADIO	EA	1
17	31	PADZZ	5305-00-054-5648	MS51957-14	96906	SCREW,MACHINE	EA	4
17	32	PADZZ	5995-00-056-8850	SMA597837-1	80063	CABLE ASSEMBLY,RADI	EA	1
17	33	PADZZ	5935-00-168-4125	SMA595807-2	80063	CONNECTOR,RECEPTACL	EA	3
17	34	PADZZ	5821-00-168-3623	SMC632174	80063	STRIP	EA	1
17	35	PAUZZ	5935-00-111-1881	259-20-30-233	71785	CONNECTOR,ELECTRICA	EA	54
17	36	PADZZ	5821-00-168-3624	SMC618887	80063	STRIP	EA	2
17	37	PADZZ		FLA505C102M	96095	CAPACITOR,FIXE	EA	4
17	38	PADZZ	5910-00-168-3466	ML105C103M	04222	CAPACITOR,FIXED	EA	2
17	39	PADZZ	5940-00-168-3375	SMC618888	80063	TERMINAL STRIP,GROU	EA	2
17	40	PAUZZ	5320-00-680-4039	MS16539-67	96906	RIVET,TUBULAR	EA	16

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
17	41	XDDZZ		SMC596378-20	80063	WASHER,FLAT	EA	32
17	42	PADZZ	5310-00-181-6034	SMC617837-12	80063	WASHER,FLAT	EA	16
17	43	PADZZ	5961-00-848-5808	MS35649-224	96906	NUT,PLAIN,HEXAGON	EA	16
17	44	XDDZZ		SMD618269	80063	CHASSIS,ELECTRICAL	EA	1
17	45	XDDZA		60-8240-0283-00070	91662	CAL,STRAIGHT	EA	37
17	46	PADZZ	5935-01-077-8334	5204-4112	91662	CONNECTOR,PIN	EA	6
17	47	XDDZZ	5910-00-159-6861	CDR01BX332BKSN	81349	CAPACITOR,FIXED,CER	EA	17

68/(69 BLANK)

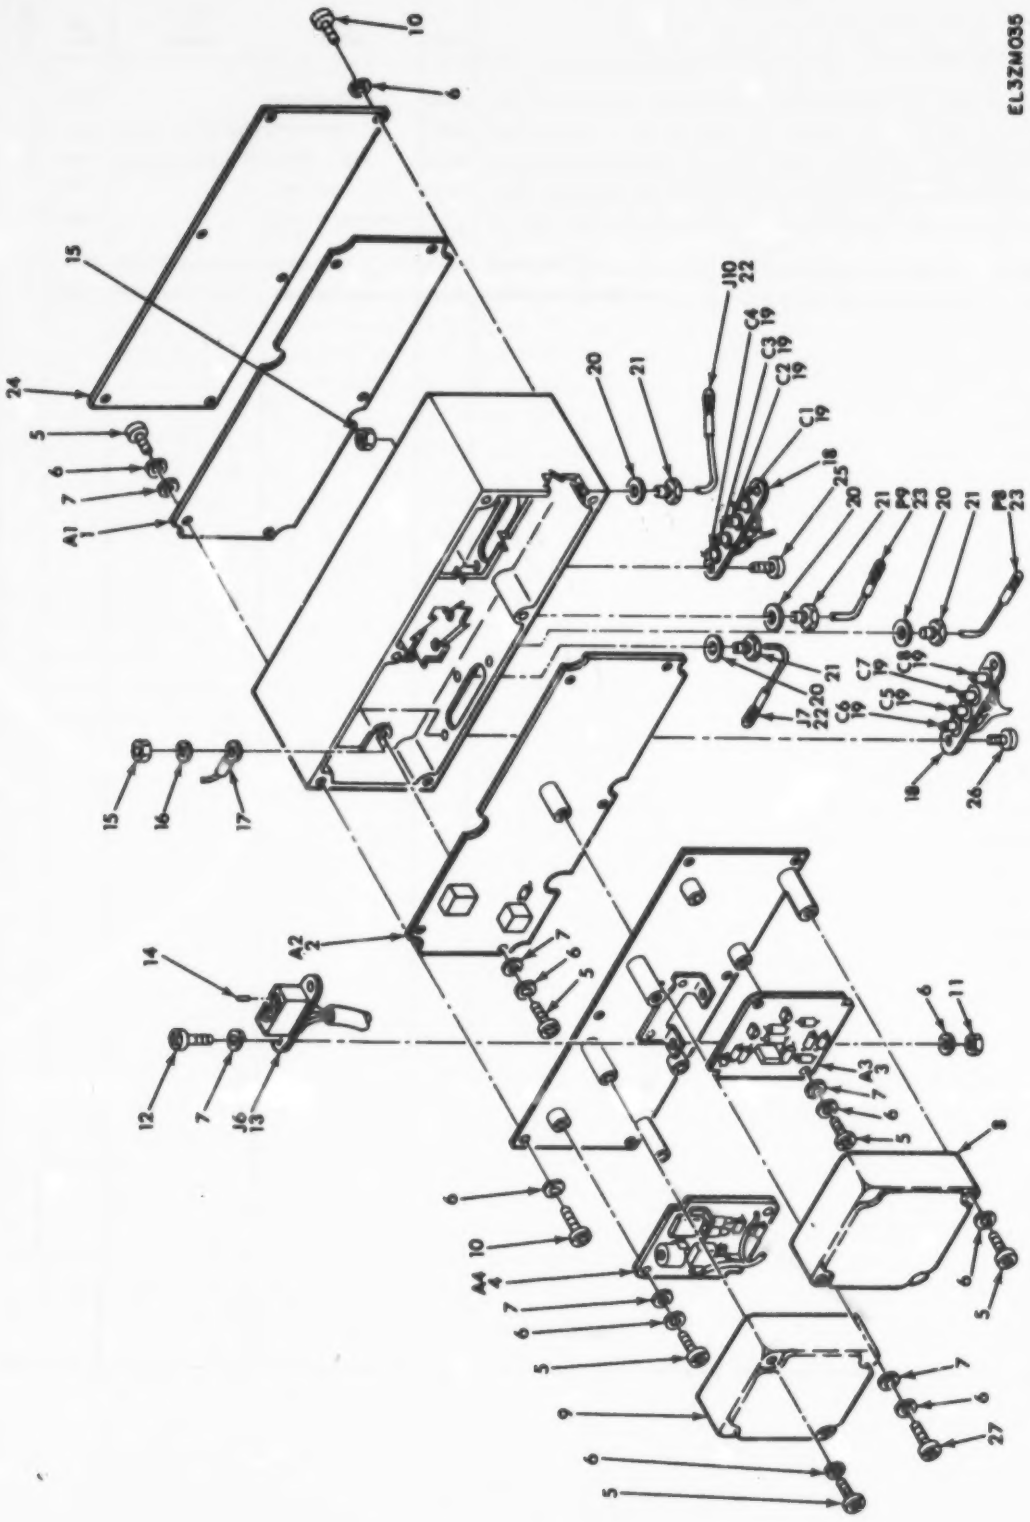

Figure 18. Main RF Amplifier Mixer Assembly

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 04 MAIN RF AMPLIFIER MIXER ASSEMBLY		
18	1	PAMDL	5821-00-926-3303	SMB618297	80063	CIRCUIT CARD ASSEMB	EA	1
18	2	PAMDL	5821-00-727-4253	SMB632012	80063	CIRCUIT CARD ASSEMB	EA	1
18	3	PAMDL	5821-00-727-4249	SMB596143	80063	CIRCUIT CARD ASSEMB	EA	1
18	4	PAMDL	5821-00-728-8084	SMB596140	80063	CIRCUIT CARD ASSEMB	EA	1
18	5	PAHZZ	5305-00-054-5637	MS51957-5	96906	SCREW,MACHINE	EA	1
18	6	PAHZZ	5310-00-928-2690	MS35338-134	96906	WASHER,LOCK	EA	18
18	7	XBHZZ		SMC617837-3	80063	WASHER,FLAT	EA	33
18	8	PAHZZ	5841-01-077-8483	SM-C-882639	80063	COVER,OSCILLATOR	EA	17
18	9	XAHZZ		SMC882638	80063	COVER,OSCILLATOR	EA	1
18	10	PAHZZ	5305-00-054-5636	MS51957-2	96906	SCREW,MACHINE	EA	1
18	11	PAHZZ	5961-00-868-5808	MS35649-224	96906	NUT,PLAIN,HEXAGON	EA	12
18	12	PAHZZ	5305-00-054-5638	MS51957-4	96906	SCREW,MACHINE	EA	2
18	13	PAHZZ	5935-00-114-8767	223-1209	29367	INSERT,ELECTRICAL C	EA	2
18	14	PAHZZ	5999-00-463-3168	220-844-02	02660	CONTACT,ELECTRICAL	EA	1
18	15	PAHZZ	5310-00-880-7010	MS21042L02	96906	NUT,SELF-LOCKING,EX	EA	7
18	16	PAHZZ	5310-00-543-6652	MS35333-69	96906	WASHER,LOCK	EA	4
18	17	PAHZZ	5940-00-569-7247	341	79963	TERMINAL,LUG	EA	1
18	18	PAHZZ	5821-00-091-9164	SMC618436	80063	PLATE,FILTER MOUNTI	EA	1
18	19	PAHZZ	5910-00-782-5000	C404-C07X5T0152M	15450	CAPACITOR,FIXED,CER	EA	2
18	20	PAHZZ	5310-00-929-6395	MS35338-136	96906	WASHER,LOCK	EA	8
18	21	XBHZZ		SMB618442	80063	BUSHING,GROUNDING	EA	4
18	22	PAHZZ	5995-00-056-8848	SMA597837-2	80063	CABLE ASSEMBLY,RADI	EA	4
18	23	PAHZZ	5995-00-056-8850	SMA597837-1	80063	CABLE ASSEMBLY,RADI	EA	2
18	24	XBHZZ		SMC618439	80063	COVER,MAIN RECEIVER	EA	2
18	25	PAHZZ	5305-00-727-8833	MS51959-3	96906	SCREW,MACHINE	EA	1
18	26	PAHZZ	5305-00-764-2984	MS51959-4	96906	SCREW,MACHINE	EA	3
18	27	PAHZZ	5305-00-054-5643	MS51957-9	96906	SCREW,MACHINE	EA	1

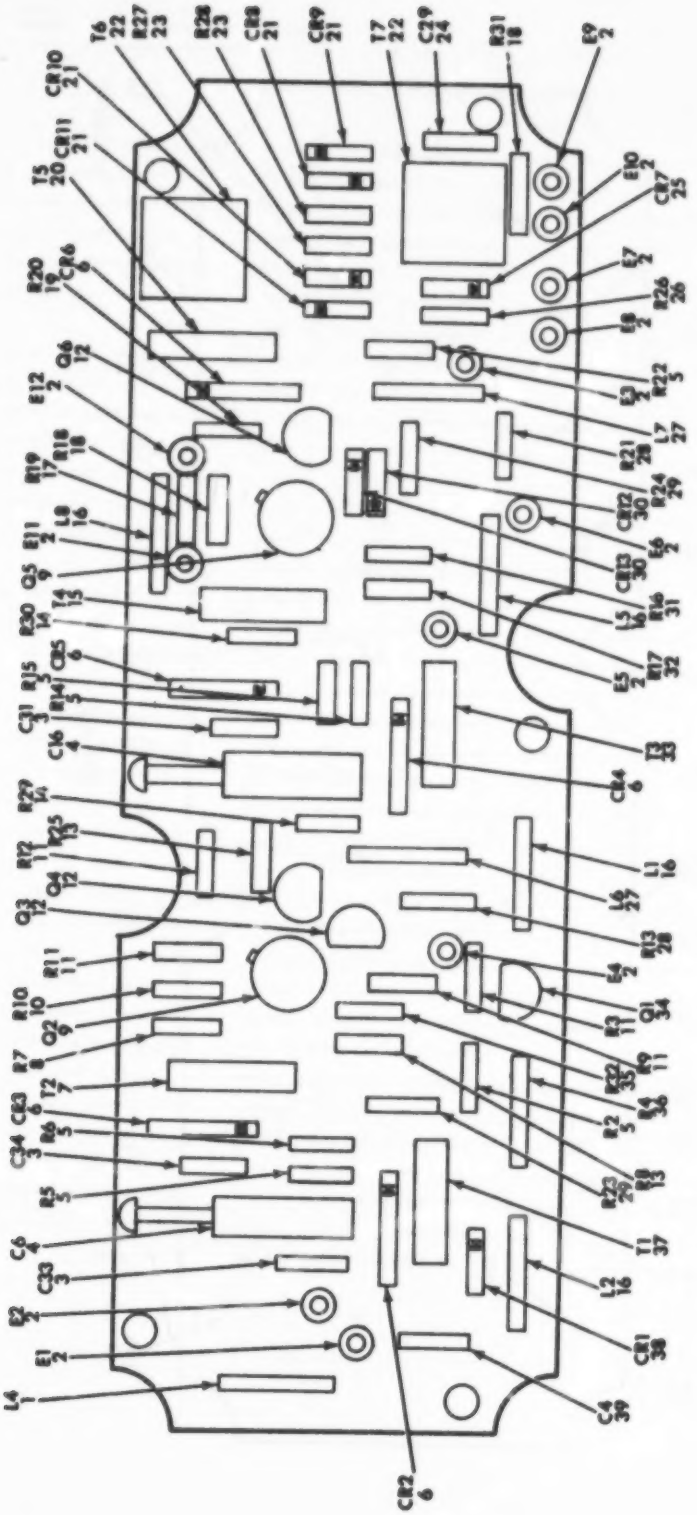

Figure 19. Main Receiver, RF Amplifier and Mixer (Sheet 1 of 2)

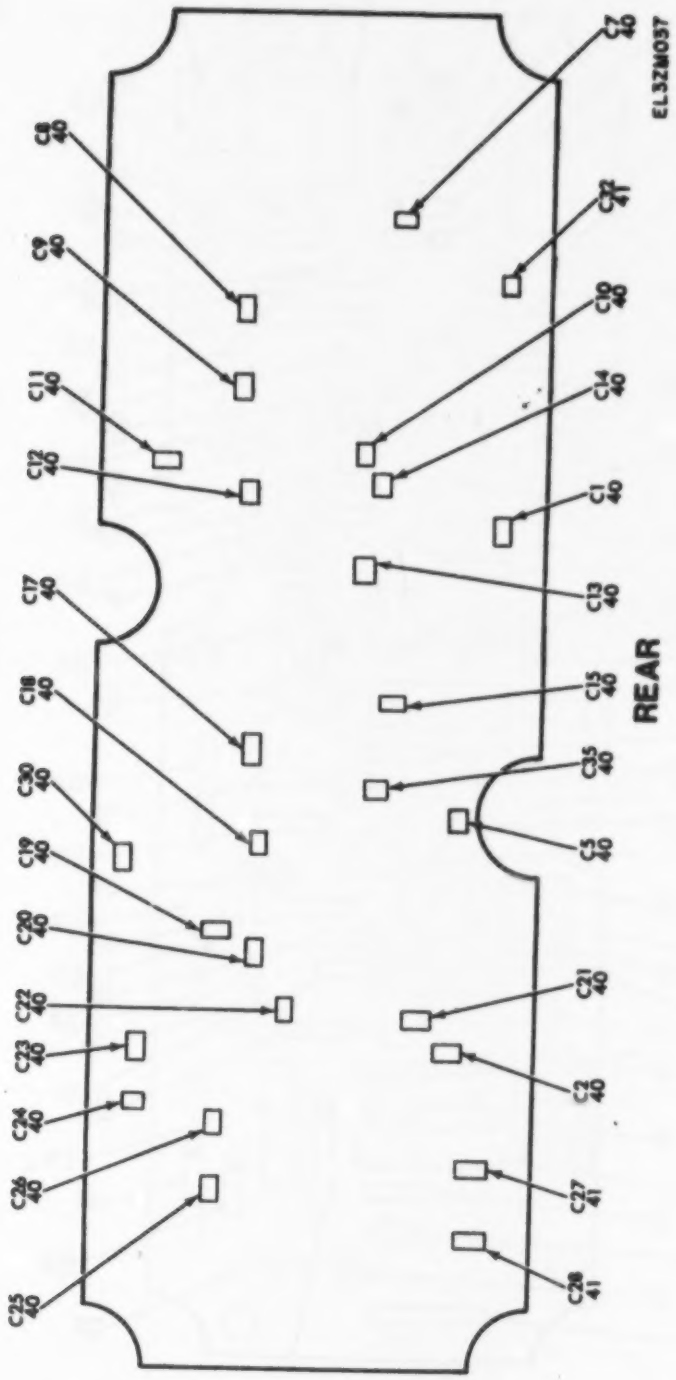

Figure 19. Main Receiver, RF Amplifier and Mixer (Sheet 2 of 2)

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0401 MAIN RECEIVER,RF AMPLIFIER AND MIXER		
19	1	PADZZ	5930-00-405-3739	09-4416-1X	06540	COIL,ELECTRICAL	EA	1
19	2	PADZZ	5940-00-611-8492	2W3184	88245	TERMINAL,STUD	EA	12
19	3	PADZZ	5910-00-903-7706	SMA595775-109	80063	CAPACITOR,VARIABLE	EA	3
19	4	PADZZ	5910-00-208-0440	530-006	72982	CAPACITOR,VARIABLE	EA	2
19	5	PADZZ	5905-00-904-5390	RC05GF473J	81349	RESISTOR,FIXED,COMP	EA	6
19	6	PADZZ	5961-00-526-7961	SMA595833-12	80063	SEMICONDUCTOR DEVIC	EA	1
19	7	XDDZZ		SMA595910-7	80063	TRANSFORMER,RADIO	EA	1
19	8	PADZZ	5905-00-948-2393	RC05GF432J	81349	RESISTOR,FIXED,COMP	EA	1
19	9	PADZZ	5961-00-926-7296	JAN2N2857	81349	TRANSISTOR	EA	2
19	10	PADZZ	5905-00-925-8762	RC05GF220J	81349	RESISTOR,FIXED,COMP	EA	1
19	11	PADZZ	5905-00-923-3534	RC05GF102J	81349	RESISTOR,FIXED,COMP	EA	4
19	12	PADZZ	5961-00-134-1496	SMA726655	80063	TRANSISTOR	EA	3
19	13	PADZZ	5905-00-912-2815	RC05GF153J	81349	RESISTOR FIXED COMP	EA	2
19	14	PADZZ	5905-00-917-5526	RC05GF912J	81349	RESISTOR,FIXED,COMP	EA	2
19	15	XDDZZ		SMA595910-9	80063	TRANSFORMER,RADIO	EA	1
19	16	PADZZ	5930-00-059-5920	1025-20	99800	COIL,RADIO FREQUENC	EA	4
19	17	PADZZ	5905-00-917-5524	RC05GF202J	81349	RESISTOR,FIXED,COMP (SELECT-AT-TEST)	EA	1
19	17	PADZZ	5905-00-951-4682	RC05GF242J	81349	RESISTOR FIXED COMP (SELECT-AT-TEST)	EA	1
19	17	PADZZ	5905-00-940-2668	RC05GF272J	81349	RESISTOR,FIXED,COMP (SELECT-AT-TEST)	EA	1
19	17	PADZZ	5905-00-421-8918	RCR05G302J5	81349	RESISTOR,FIXED,COMP (SELECT-AT-TEST)	EA	1
19	17	PADZZ	5905-00-922-7216	RC05GF332J	81349	RESISTOR,FIXED,COMP (SELECT-AT-TEST)	EA	1
19	17	PADZZ	5905-00-917-5525	RC05GF362J	81349	RESISTOR,FIXED,COMP (SELECT-AT-TEST)	EA	1
19	18	PADZZ	5905-00-853-8921	RC05GF750J	81349	RESISTOR,FIXED,COMP	EA	1
19	19	PADZZ	5905-00-945-4957	RC05GF222J	81349	RESISTOR,FIXED,COMP	EA	2
19	20	XDDZZ		SMA595910-10	80063	TRANSFORMER,RADIO	EA	1
19	21	PADZZ	5961-00-299-6161	MS1498	13327	SEMICONDUCTOR DEVIC	EA	1
19	22	PADZZ	5950-00-296-4735	318-0224-01	06978	TRANSFORMER,RADIO F	EA	4
19	23	PADZZ	5905-00-947-7840	RC05GF331J	81349	RESISTOR FIXED COMP	EA	1
19	24	PADZZ	5910-01-031-8063	ML105A300K	04222	CAPACITOR,FIXED,CER	EA	2
19	25	PADZZ	5961-00-421-8882	JAN1N4531	81349	SEMICONDUCTOR DEVIC	EA	1
19	26	PADZZ	5905-00-922-7216	RC05GF332J	81349	RESISTOR,FIXED,COMP	EA	1
19	27	PADZZ	5930-00-904-1820	1025-38	99800	COIL,RADIO FREQUENC	EA	1
19	28	PADZZ	5905-00-782-4107	RC05GF471J	81349	RESISTOR,FIXED,COMP	EA	2
19	29	PADZZ	5905-00-922-7215	RC05GF103J	81349	RESISTOR,FIXED,COMP	EA	2
19	30	PADZZ	5961-00-201-7132	HPA8338	28480	SEMICONDUCTOR DEVIC	EA	2
19	31	PADZZ	5905-00-946-6352	RC05GF752J	81349	RESISTOR,FIXED,COMP	EA	2
19	32	PADZZ	5905-00-951-4682	RC05GF242J	81349	RESISTOR FIXED COMP	EA	1
19	33	XDDZZ		SMA595910-8	80063	TRANSFORMER,RADIO	EA	1

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
19	34	PADZZ	5961-00-124-5295	SMA72e658	80063	TRANSISTOR	EA	1
19	35	PADZZ	5905-00-967-5522	RC05GF203J	01349	RESISTOR	EA	1
19	36	PAUZZ	5905-00-116-2396	RCR07G511J5	01349	RESISTOR,FIXED,COMP	EA	1
19	37	XDUZZ		SMA595910-6	80063	TRANSFORMER,RADIO	EA	1
19	38	PADZZ	5961-00-201-7517	SMA617936-1	80063	SEMICONDUCTOR DEVIC	EA	1
19	39	PADZZ		ML109A36DK	04222	CAPACITOR,FIXE	EA	1
19	40	PAUZZ	5910-01-031-0031	ULA105C10ZM	04222	CAPACITOR,FIXED,CER	EA	24
19	41	XDDZZ	5910-00-159-6861	CDR01BX332BKSM	81349	CAPACITOR,FIXED,CER	EA	3

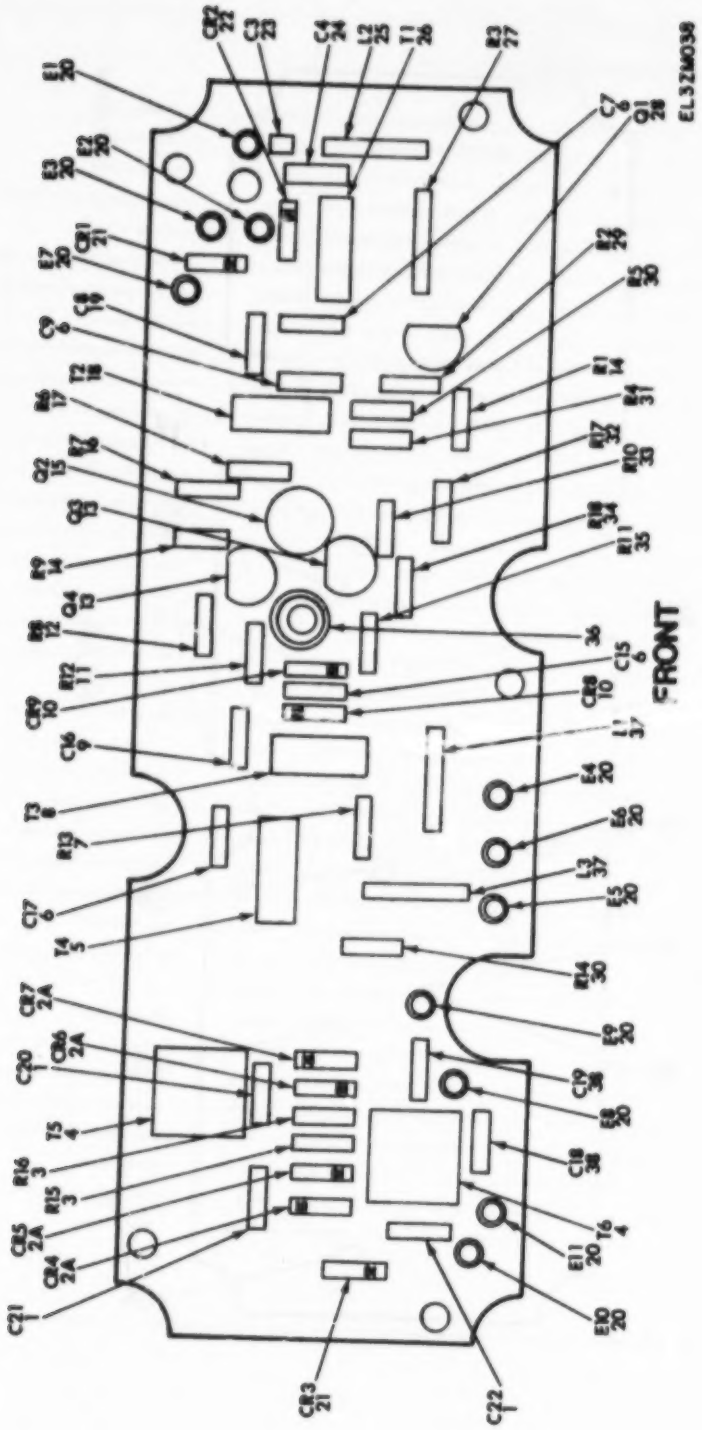

Figure 20. Guard RF Amplifier and Mixer Assembly (Sheet 1 of 2)

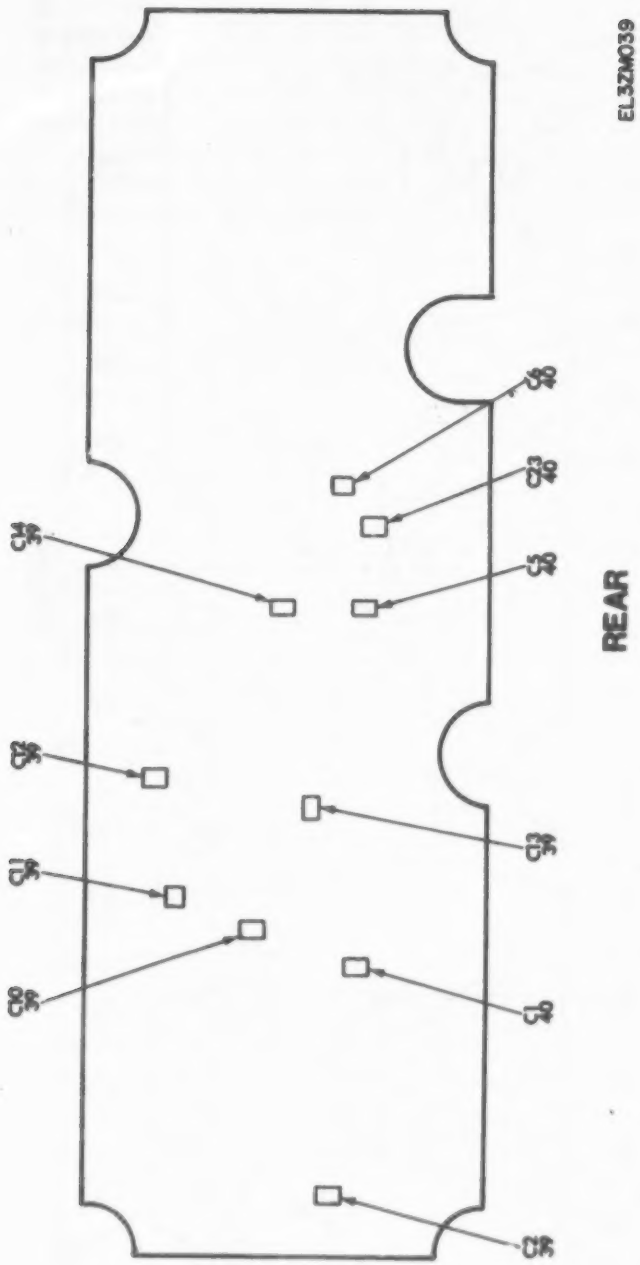

Figure 20. Guard RF Amplifier and Mixer Assembly (Sheet 2 of 2)

(1) ILLUSTRATION (a) FIG NO.	(b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0402 GUARD RF AMPLIFIER AND MIXER AS SEMBLY		
20	1	PAUZZ		ML105B102M	04222	CAPACITOR,FIXE	EA	3
20	2	PADZZ		SMA595827-5	80063	SEMICONDUCTOR DEVICE	EA	4
20	3	PAUZZ		RCU5GF331R	81349	RESISTOR,FIXE	EA	2
20	4	PADZZ	5950-00-496-4735	316-0224-01	06078	TRANSFORMER,RADIO F	EA	2
20	5	XDDZZ		SMA595910-12	80063	TRANSFORMER,RADIO	EA	1
20	6	PAUZZ	5910-00-526-7983	ML105A180J	04222	CAPACITOR,FIXED,CER	EA	4
20	7	PADZZ	5905-00-350-7775	RCU5GF221R	81349	RESISTOR,FIXED,COMP	EA	1
20	8	XDDZZ		SMA595911-51	80063	CCTL,ATR	EA	1
20	9	PADZZ	5910-01-077-8335	SM-A-595775-159	80063	CAPACITOR,FIXE SELECT AT TEST	EA	1
20	9	PADZZ	5910-01-077-8326	SM-A-595775-229	80063	CAPACITOR,FIXE SELECT AT TEST	EA	1
20	9	PADZZ	5910-01-077-8329	SM-A-595775-279	80063	CAPACITOR,FIXE SELECT AT TEST	EA	1
20	10	PADZZ	5961-00-408-0527	JANIN4554	81349	SEMICONDUCTOR DEVIC	EA	1
20	11	PAUZZ	5905-00-914-2088	RCU5GF512J	81349	RESISTOR,FIXED,COMP	EA	2
20	12	PAUZZ	5905-00-923-8534	RCU5GF102J	81349	RESISTOR,FIXED,COMP	EA	1
20	13	PADZZ	5961-00-126-1496	SMA726655	80063	TRANSISTOR	EA	1
20	14	PAUZZ	5905-00-915-0979	RC05GF163J	81349	RESISTOR FIXED COMP	EA	2
20	15	PADZZ	5961-00-926-7296	JANIN2857	81349	TRANSISTOR	EA	1
20	16	PAUZZ	5905-00-967-7038	RCU5GF911J	81349	RESISTOR,FIXED,COMP	EA	1
20	17	PAUZZ	5905-00-914-2151	RCU5GF100J	81349	RESISTOR FIXED COMP	EA	1
20	18	XDDZZ		SMA595910-11	80063	TRANSFORMER,RADIO	EA	1
20	19	PADZZ	5910-00-905-7706	SMA595775-139	80063	CAPACITOR,VARIABLE	EA	1
20	20	PAUZZ	5940-00-414-8492	203184	88245	TERMINAL,STUD	EA	11
20	21	PAUZZ	5961-00-421-8882	JANIN4531	81349	SEMICONDUCTOR DEVIC	EA	2
20	22	PAUZZ	5961-00-201-7517	SMA617936-1	80063	SEMICONDUCTOR DEVIC	EA	1
20	23	PAUZZ	5910-01-026-4804	ULA10SA10ER	56095	CAPACITOR,FIXED,CER	EA	1
20	24	PAUZZ	5910-01-031-8025	ML10SA150J	04222	CAPACITOR,FIXED,CER	EA	1
20	25	PADZZ	5950-00-961-9599	1025-26	99800	CCTL,RADIO FREQUENC	EA	1
20	26	PAUZZ		500-2001-7	93292	TRANSFORMER,RADI	EA	1
20	27	PAUZZ	5905-00-116-2394	RLR07651IJS	81349	RESISTOR,FIXED,COMP	EA	1
20	28	PADZZ	5961-00-129-5245	SMA726656	80063	TRANSISTOR	EA	1
20	29	PADZZ		RC05GF470R	81349	RESISTOR,FIXE	EA	1
20	30	PAFUL	5905-00-924-7410	RCU5GF332J	81349	RESISTOR,FIXED,COMP	EA	1
20	31	PAUZZ	5905-00-904-5390	RCU5GF473J	81349	RESISTOR,FIXED,COMP	EA	2
20	32	PAUZZ	5905-00-924-7215	RCU5GF103J	81349	RESISTOR,FIXED,COMP	EA	1
20	33	PAUZZ	5905-00-458-9500	RLR05G102JS	81349	RESISTOR,FIXED,COMP	EA	1
20	34	PAUZZ		RCU5GF1d3K	81349	RESISTOR,FIXE	EA	1
20	35	PAUZZ	5905-00-180-8361	RLR05G1U1JS	81349	RESISTOR,FIXED,COMP	EA	1
20	36	XDDZZ		SM6692764	80063	SPACER	EA	1

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
20	37	PAOZZ	5950-00-039-5920	1025-20	99800	COIL,RADIO FREQUENC	EA	2
20	38	PAOZZ	5910-00-160-3486	ML105C103M	04222	CAPACITOR,FIXED	EA	2
20	39	PAOZZ	5910-01-031-8031	ULA105C102M	04222	CAPACITOR,FIXED,CER	EA	6
20	40	PAOZZ	5910-00-159-6861	CDR01BX332BKSM	81349	CAPACITOR,FIXED,CER	EA	4

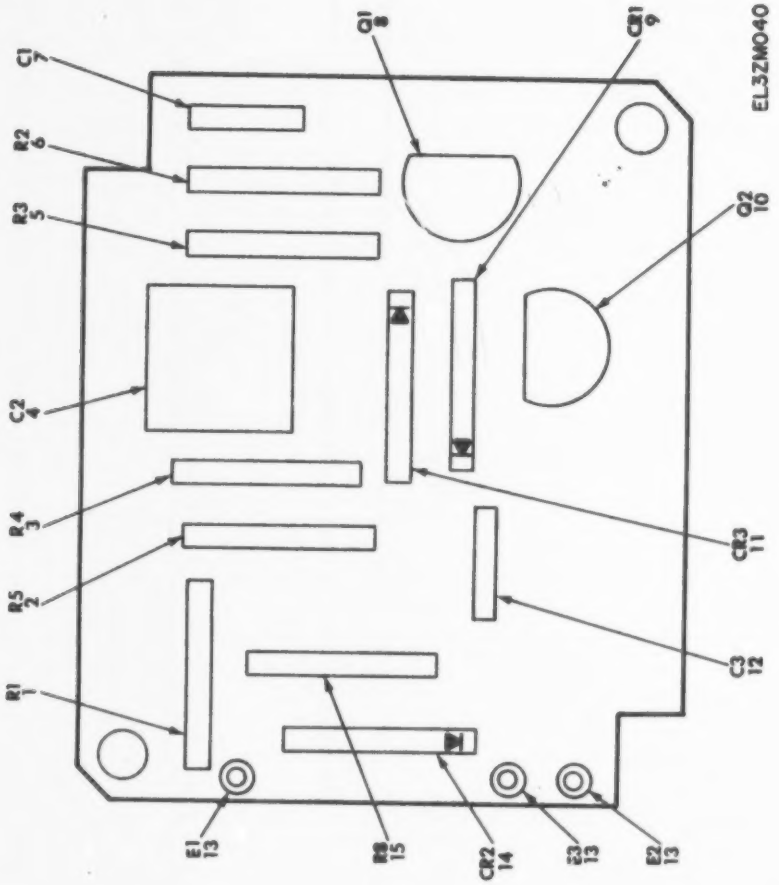

Figure 21. Noise Generator

(1) ILLUSTRATION (a) FIG NO.	(b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0403 NOISE GENERATOR		
21	1	PADZZ	5905-00-465-9557	RCU7GF100K	81349	RESISTOR,FIXED,COMP	EA	1
21	2	PADZZ	5905-00-682-4097	RC07GF302J	81349	RESISTOR,FIXED,COMP	EA	1
21	3	PADZZ	5905-00-726-5344	RC07GF153K	81349	RESISTOR,FIXED,COMP	EA	1
21	4	PADZZ		CK16M223M	86335	CAPACITOR,FIXED,CER	EA	1
21	5	PADZZ		RCU7GF303K	81349	RESISTOR,FIXE	EA	1
21	6	PADZZ	5905-00-726-6435	RL07GF331K	81349	RESISTOR,FIXED,COMP	EA	1
21	7	PADZZ	5910-00-458-5804	ML105B102K	04222	CAPACITOR,FIXED,CER	EA	1
21	8	PADZZ	5961-01-058-7786	SR-A-726661	80063	TRANSISTOR	EA	1
21	9	PADZZ	5961-00-526-7974	CUD14322	16352	SEMICONDUCTOR DEVIC	EA	1
21	10	PADZZ	5961-00-134-1496	SMA726655	80063	TRANSISTOR	EA	1
21	11	PADZZ	5961-00-938-1135	JAN1N4148	81349	SEMICONDUCTOR DEVIC	EA	1
21	12	PADZZ	5910-01-031-8046	ML105A100K	04222	CAPACITOR,FIXED,CER	EA	1
21	13	XDDZZ		706484	88245	TERMINAL STU	EA	1
21	14	PADZZ		JAN1N3064	07688	SEMICONDUCTOR DE	EA	3
21	15	PADZZ	5905-00-752-3340	RC07GF472K	81349	RESISTOR,FIXED,COMP	EA	1

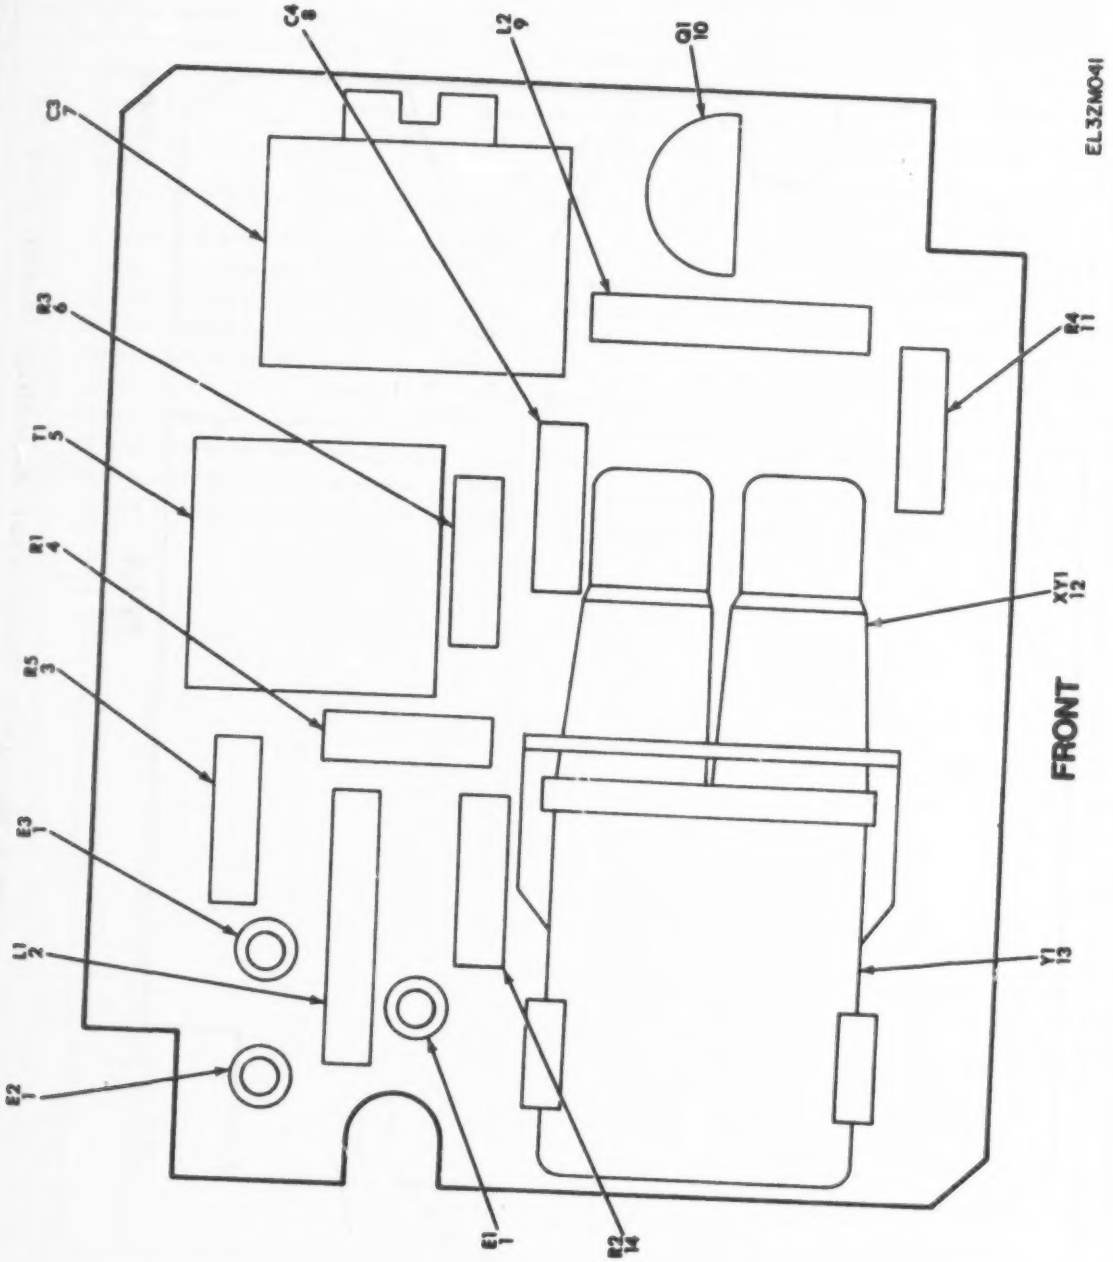

Figure 22. Guard Receiver Oscillator Assembly (Sheet 1 of 2)

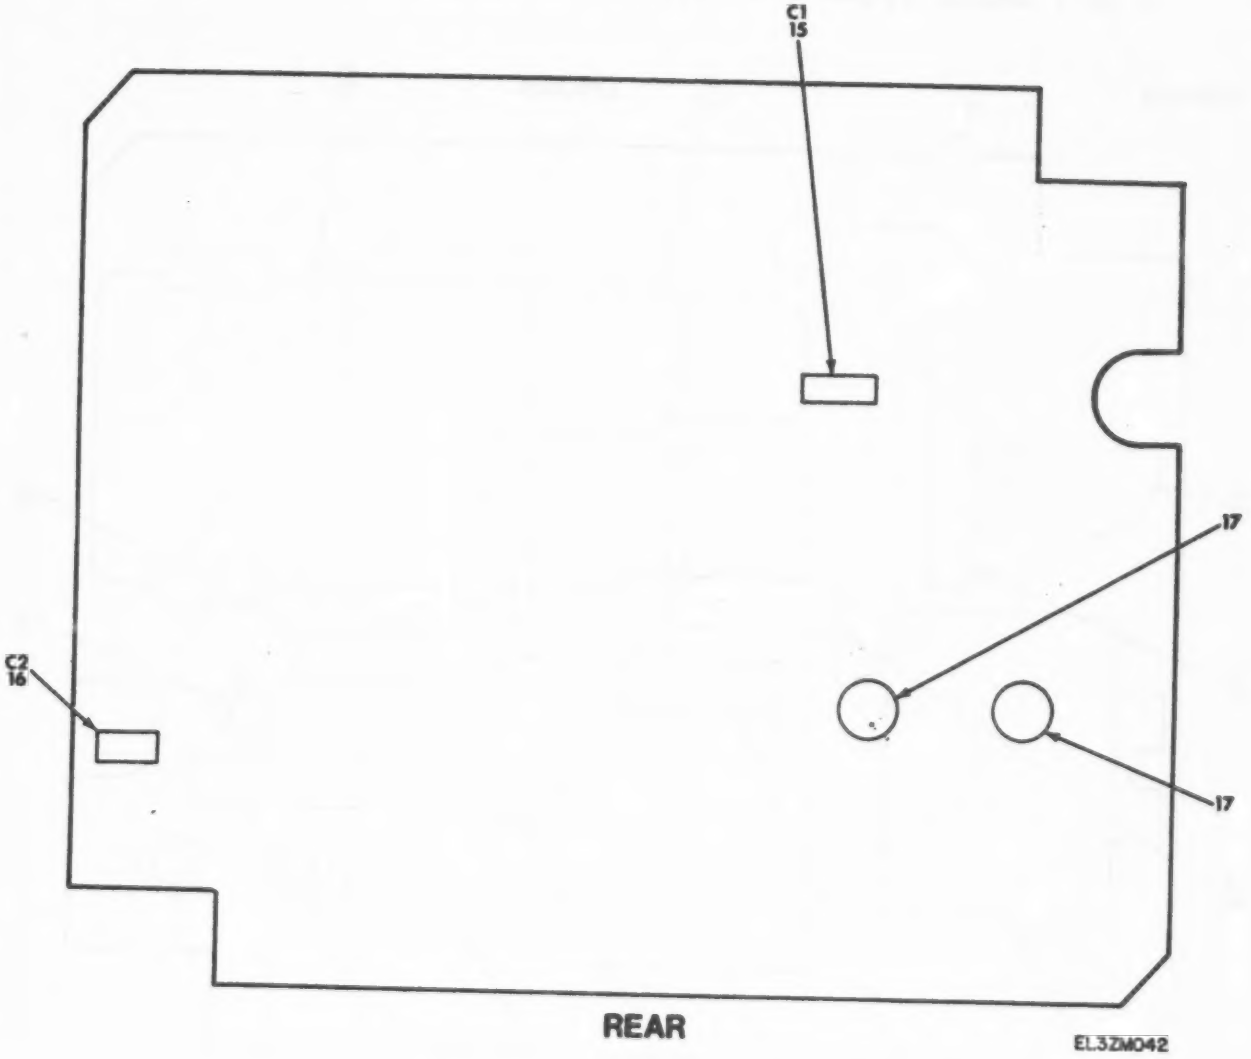

Figure 22. Guard Receiver Oscillator Assembly (Sheet 2 of 2)

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0404 GUARD RECEIVER USC ASSEMBLY		
22	1	PAD44	5940-00-411-8492	203184	88245	TERMINAL,STUD	EA	3
22	2	PADZZ	5950-00-946-7781	1025-48	99800	COIL,RADIO FREQUENC	EA	1
22	3	PADZZ		RC05GF470K	81349	RESISTOR,FIXE	EA	1
22	4	PADZZ		RC05GF822K	81349	RESISTOR,FIXE	EA	1
22	5	PADZZ		318-220-02	06078	TRANSFORMER,RADIO	EA	1
22	6	PADZZ		RC05GF472K	81349	RESISTOR,FIXE	EA	1
22	7	PAD44	5910-00-879-6053	538-007-5-5-18PF A	15450	CAPACITOR,VARIABL	EA	1
22	8	PADZZ	5910-00-458-5804	ML10SB102K	04222	CAPACITOR,FIXED,CER	EA	1
22	9	PADZZ	5950-00-059-5921	1025-08	99800	COIL,RADIO FREQUENC	EA	1
22	10	PADZZ	5961-00-201-7133	SPS6968M	04713	TRANSISTOR	EA	1
22	11	PADZZ	5905-00-761-5758	RCR05G471JS	81349	RESISTOR,FIXED,COMP	EA	1
22	12	PADZZ	5955-00-908-8636	8004-1G17	91506	CRYSTAL	EA	1
22	13	PADZZ		CR83U	81349	CRYSTAL UNIT	EA	1
22	14	PADZZ	5905-00-407-6082	RCR05G182JS	81349	RESISTOR,FIXED,COMP	EA	1
22	15	XDDZZ	5910-00-159-6861	CDR01BX332BKSM	81349	CAPACITOR,FIXED,CER	EA	1
22	16	PADZZ	5910-01-031-8031	ULA10SC102M	04222	CAPACITOR,FIXED,CER	EA	1
22	17	PAD44	5320-00-433-4073	SM8595946-1	80063	RIVET,TUBULAR	EA	2

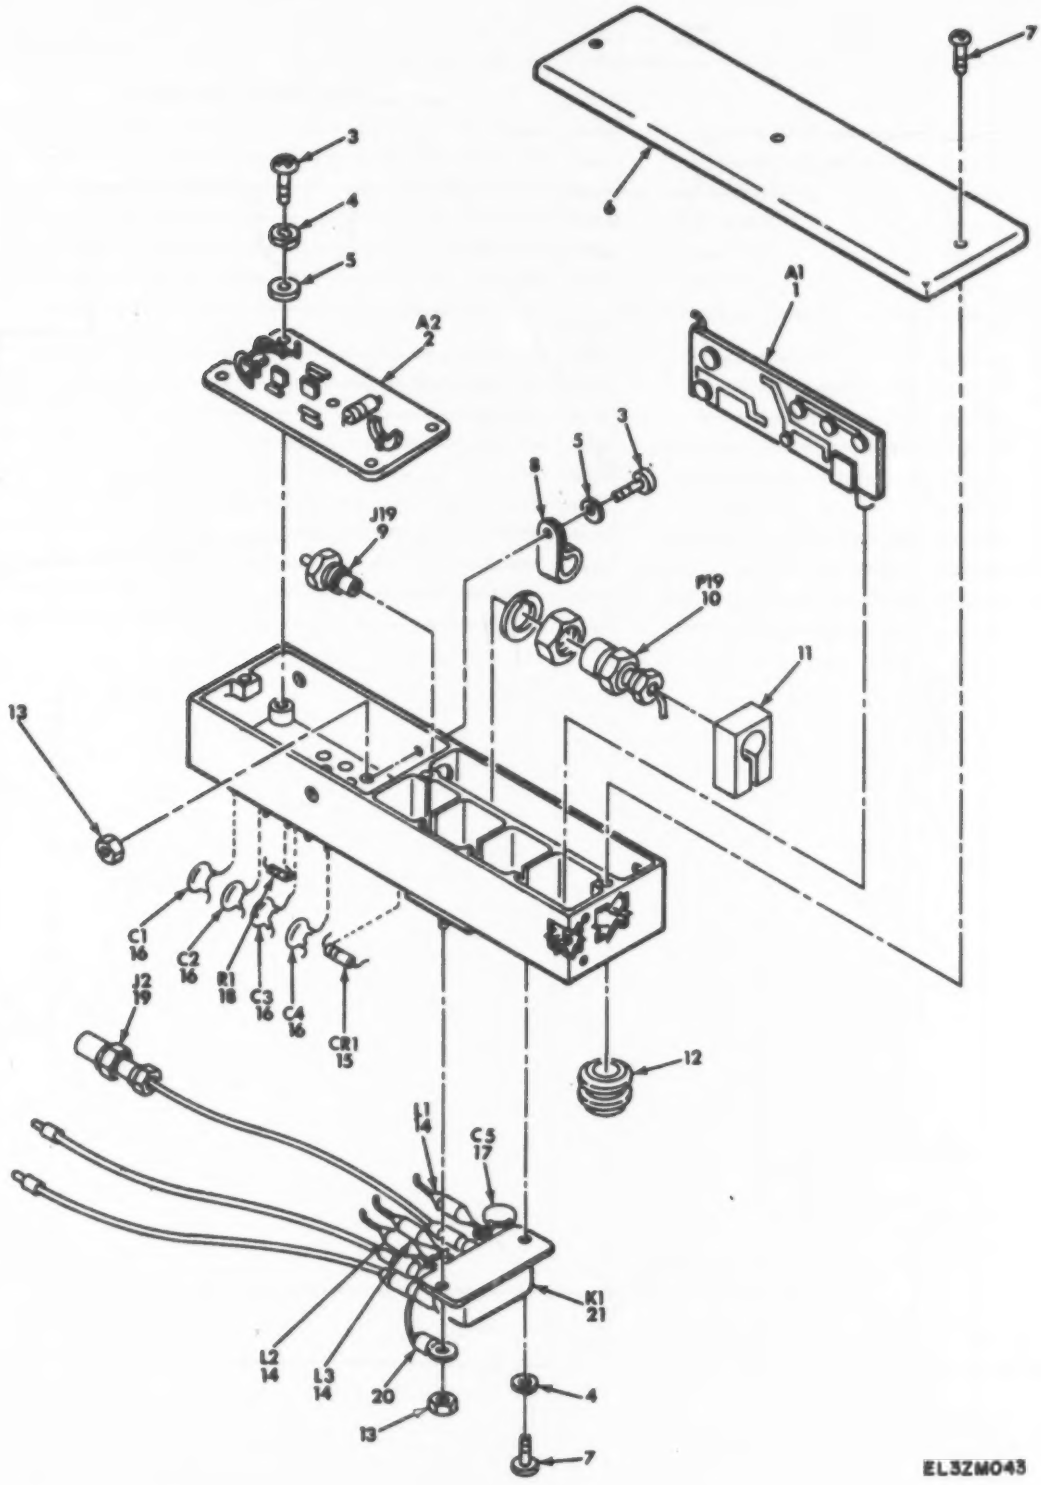

Figure 23. RF Coupler and Filter Assembly

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 05 RF COUPLER AND FILTER ASSEMBLY		
23	1	PAODL	5921-00-724-1711	SM8618293	80063	CIRCUIT CARD ASSEMB	EA	1
23	2	PAODL	5821-01-057-6414	SM8605967	80063	CIRCUIT CARD ASSEMB	EA	1
23	3	PAHZZ	5305-00-054-5637	MS51957-3	96906	SCREW,MACHINE	EA	5
23	4	PAHZZ	5310-00-928-2690	MS35338-134	96906	WASHER,LOCK	EA	5
23	5	XBHZZ		SMC617837-3	80063	WASHER,FLAT	EA	5
23	6	XBHZZ		SMC618213	80063	COVER,ELECTRICAL	EA	1
23	7	PAHZZ	5305-00-054-5636	MS51957-2	96906	SCREW,MACHINE	EA	6
23	8	PAHZZ	5340-00-245-4820	1-8JNA	95987	CLAMP,LOOP	EA	1
23	9	PAHZZ	5935-00-782-6166	66937-000-000	94375	CONNECTOR,RECEPTACL	EA	1
23	10	PAHZZ	5935-00-762-0412	66901-000-801	94375	CONNECTOR,PLUG,ELEC	EA	1
23	11	XBHZZ		SMC632302	80063	SUPPORT,CONNECTOR	EA	1
23	12	PAHZZ	5325-00-174-5317	MS35489-4	96906	GROMMET,RUBBER	EA	1
23	13	PAHZZ	5310-00-880-7010	MS21042L02	96906	NUT,SELF-LOCKING,EX	EA	2
23	14	PAHZZ	5915-00-116-2766	70202-1	82142	SUPPRESSOR,PARASITI	EA	3
23	15	PAHZZ	5961-00-148-4501	1N4003	04713	SEMICONDUCTOR DEVIC	EA	1
23	16	PAHZZ	5910-00-889-4618	CK60BX101M	81349	CAPACITOR,FIXED,CER	EA	4
23	17	PAHZZ	5910-00-838-9421	CK60AW103M	81349	CAPACITOR,FIXED,CER	EA	1
23	18	PAHZZ	5905-00-686-4528	RC07GF332K	81349	RESISTOR,FIXED,COMP	EA	1
23	19	PAHZZ	5935-00-728-5605	7016-3	95712	CONNECTOR,RECEPTACL	EA	1
23	20	PAHZZ	5940-00-569-7267	341	79963	TERMINAL,LUG	EA	1
23	21	PAHZZ	5945-00-829-9969	SMA617905-1	80063	RELAY,ARMATURE	EA	1

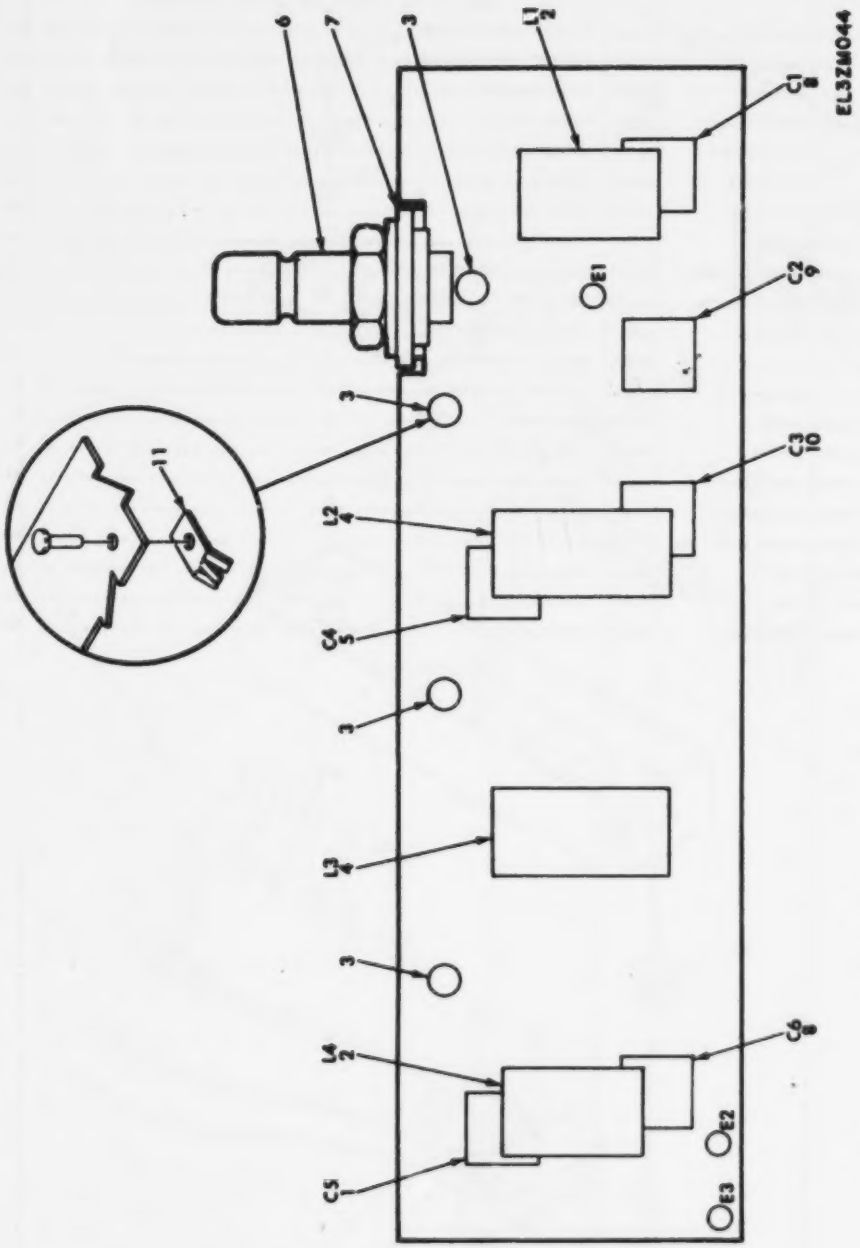

Figure 24. Low Pass Filter Circuit Card

(1) ILLUSTRATION (a) FIG. NO.	(b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0502 LOW PASS FILTER CIRCUIT CARD		
24	1	PAOZZ	5910-00-901-3957	UYU127OF	73899	CAPACITOR,FIXED,CER	EA	1
24	2	XDDZZ		SMA595911-14	80063	COIL,AIR	EA	2
24	3	PADZZ	5320-00-081-7418	MS16535-12	96906	RIVET,TUBULAR	EA	4
24	4	XDDZZ		SMA595911-15	80063	COIL,RADIO FREQUENC	EA	2
4	5	PADZZ	5910-00-432-8218	UYU130OF	73899	CAPACITOR,FIXED,CER	EA	1
4	6	PADZZ	5935-00-782-6166	66937-000-000	94375	CONNECTOR,RECEPTACL	EA	1
4	7	XADZZ		SMB618312	80063	CR,COAXIAL	EA	1
4	8	PADZZ		UYU118OF	73899	CAPACITOR,FIXE	EA	2
4	9	PADZZ		UYU122OF	73899	CAPACITOR,FIXE	EA	1
4	10	PADZZ	5910-00-489-9990	UYU14R7C	73899	CAPACITOR,FIXED,CER	EA	1
4	11	XDDZZ		SMB618313	80063	CLIP,SPRING TENSION	EA	3

best copy available

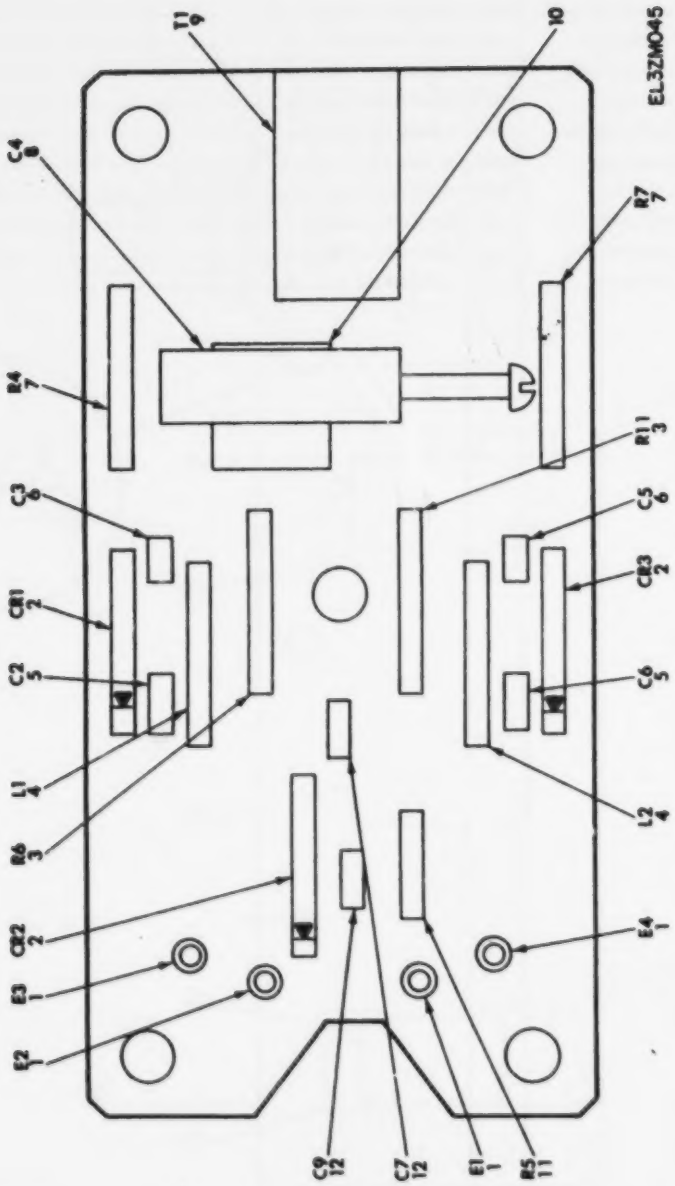

Figure 25. RF Coupler Circuit Card

(1) ILLUSTRATION (a) FIG NO.	(b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0503 RF COUPLER CIRCUIT CARD		
25	1	PADZZ	5940-00-411-8492	203184	88245	TERMINAL,STUD	EA	4
25	2	PADZZ	5961-00-526-7975	SMA995820-1	80063	SEMICONDUCTOR DEVIC	EA	1
25	3	PADZZ	5905-00-051-0161	M22684-01-0033	81349	RESISTOR,FIXED,FILM	EA	2
25	4	PADZZ	5950-00-716-4085	1025-32	99800	COIL,RADIO FREQUENC	EA	2
25	5	PADZZ	5910-01-060-6628	SMA595799-69	80063	CAPACITOR,FIXED,CER	EA	2
25	6	PADZZ	5910-00-201-7551	RLA305A100J	96095	CAPACITOR,FIXED,CER	EA	2
25	7	PADZZ	5905-00-490-0247	RLR07C791GR	81349	RESISTOR,FIXED,FILM	EA	2
25	8	PADZZ	5910-00-206-0440	530-006	72982	CAPACITOR,VARIABLE	EA	2
25	9	XDDZZ		ITU1143-2	09969	TRANSFORMER,RADIO F	EA	1
25	10	XDDZZ		SMB692V02	80063	SPACER	EA	1
25	11	PADZZ	5905-00-922-7218	RCU5GF392J	81349	RESISTOR,FIXED,COMP	EA	1
25	12	PADZZ	5910-00-285-2265	ULA505C102RM	96095	CAPACITOR,FIXED,CER	EA	2

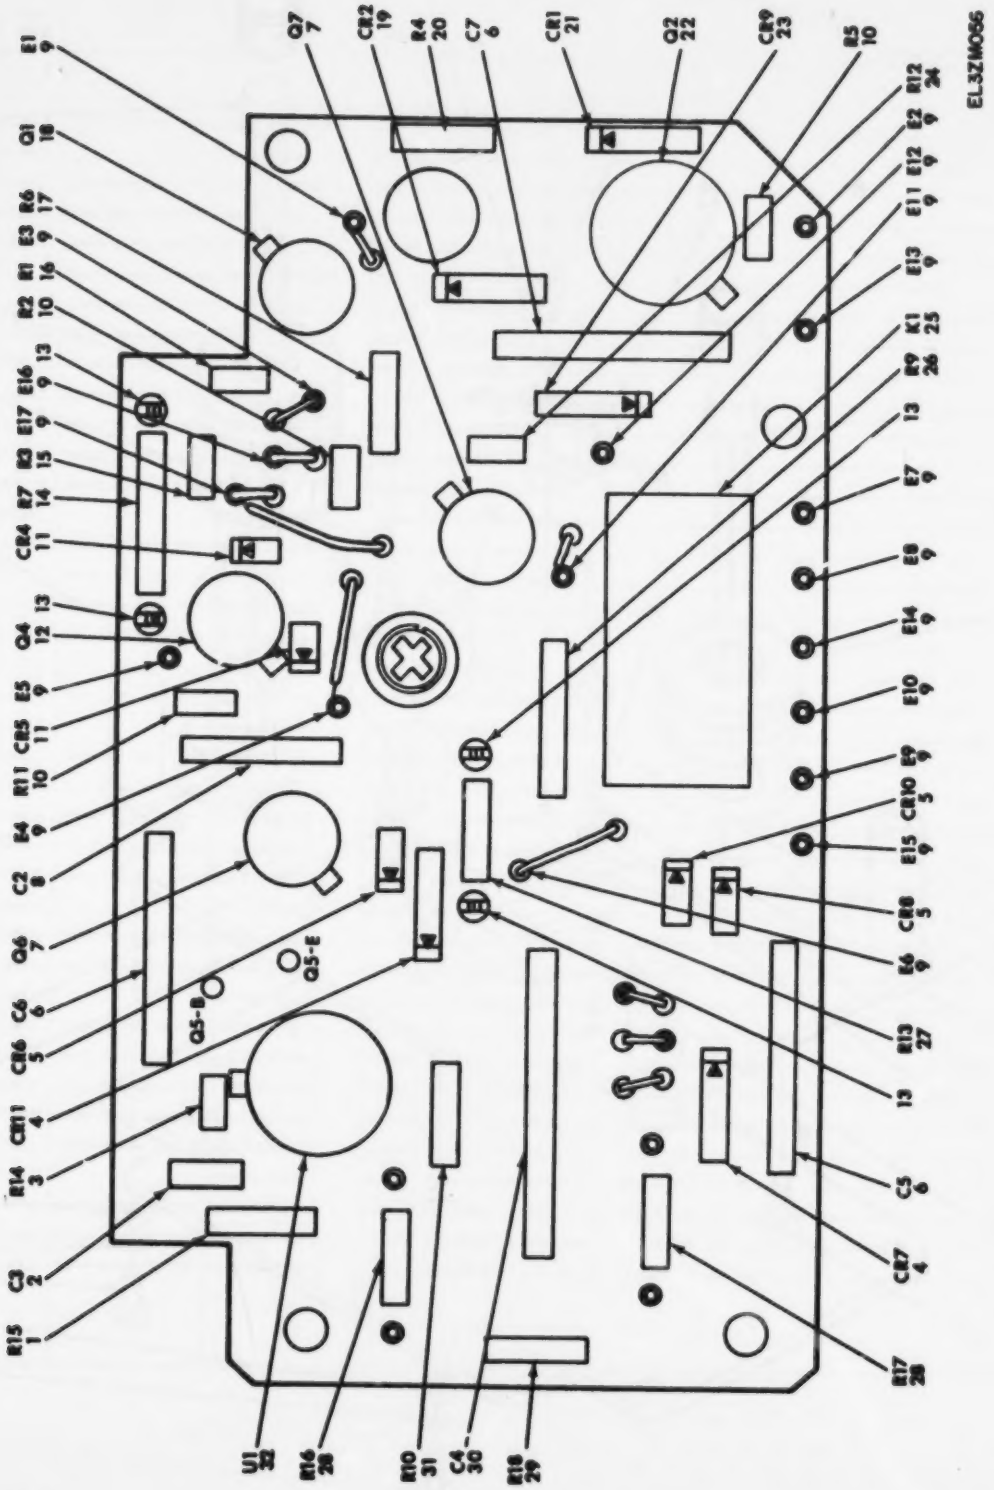

Figure 26. Power Supply (Sheet 1 of 2)

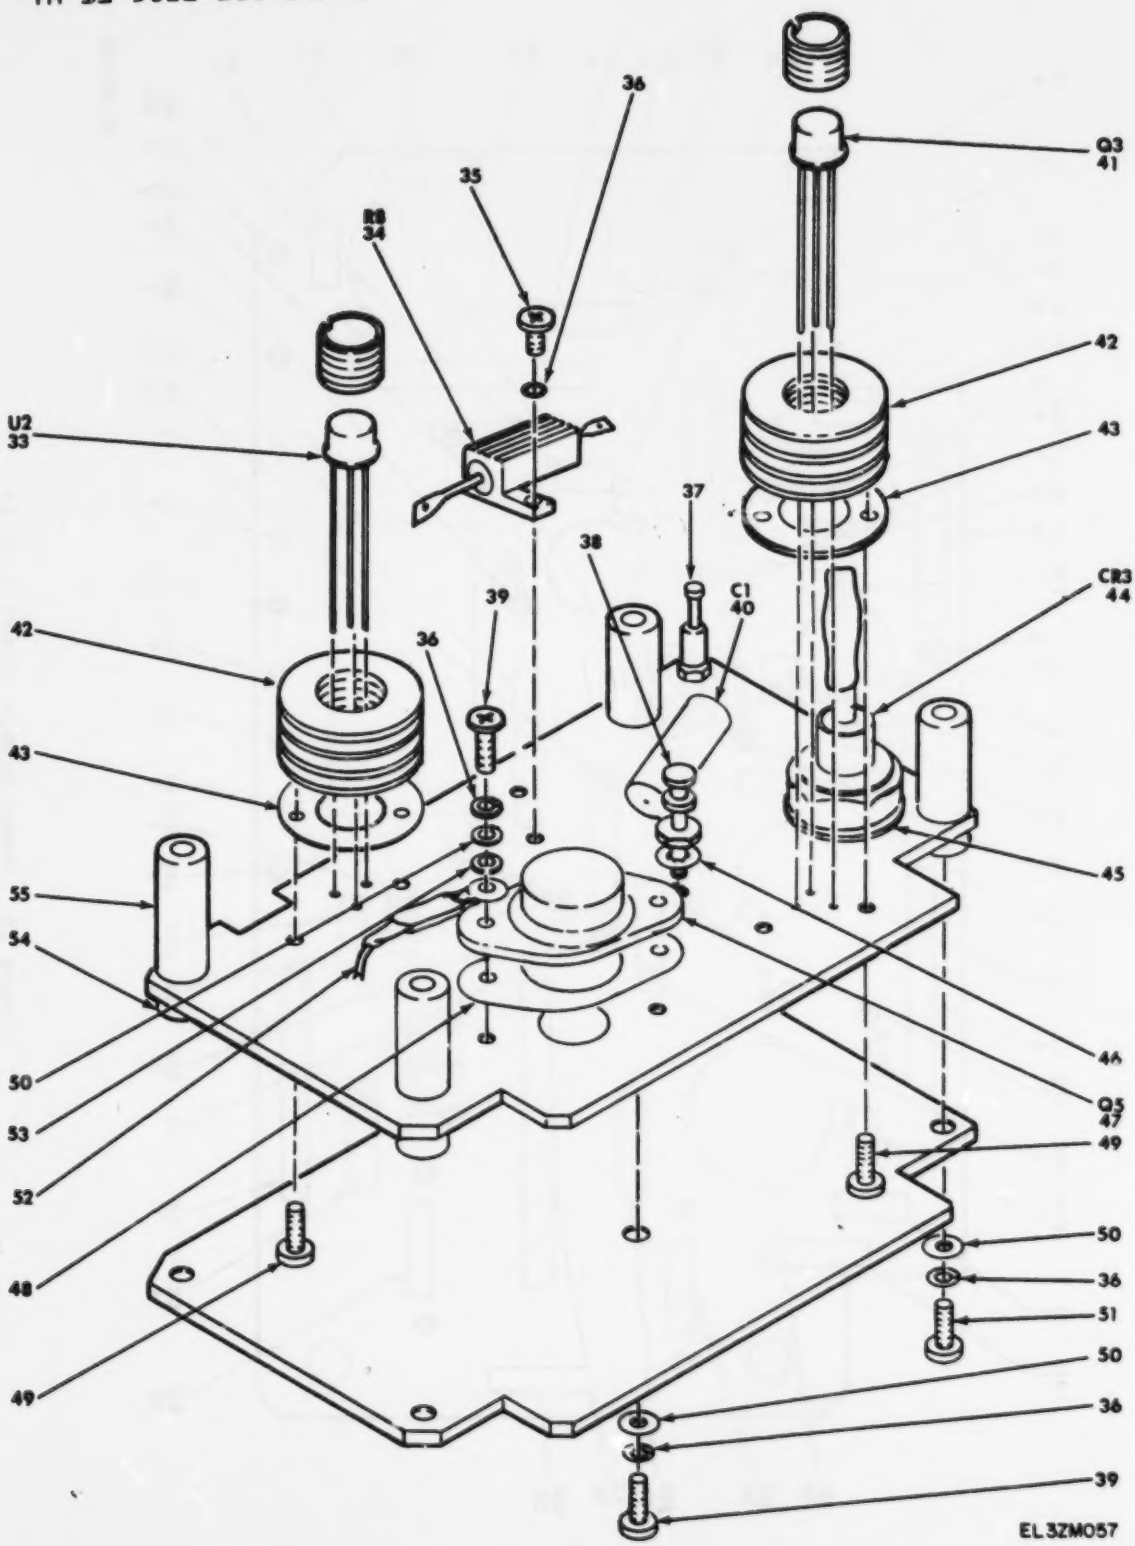

Figure 26. Power Supply (Sheet 2 of 2)

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 06 POWER SUPPLY		
26	1	PADZZ	5905-00-457-3979	RNR55C2671FS	81349	RESISTOR,FIXED,FILM	EA	1
26	2	PADZZ		ML10SA101K	04222	CAPACITOR,FIXE	EA	1
26	3	PADZZ	5905-00-433-1853	RCR05G220JS	81349	RESISTOR,FIXED,COMP	EA	1
26	4	PADZZ	5961-00-847-5246	JAN1N746A	81349	SEMICONDUCTOR DEVIC	EA	2
26	5	PADZZ	5961-00-823-9975	2302	28480	SEMICONDUCTOR DEVIC	EA	3
26	6	PADZZ	5910-00-433-5446	M26655/2-0094	81349	CAPACITOR FIXED	EA	3
26	7	PADZZ	5961-00-951-8757	JAN2N2222A	81349	TRANSISTOR	EA	2
26	8	PADZZ	5910-00-495-0042	M26655/2-0146	81349	CAPACITOR,FIXED,ELE	EA	1
26	9	PADZZ	5940-00-411-8492	203184	88245	TERMINAL,STUD	EA	17
26	10	PADZZ	5905-00-458-9500	RCR05G102JS	81349	RESISTOR,FIXED,COMP	EA	3
26	11	PADZZ	5961-00-421-8882	JAN1N4531	81349	SEMICONDUCTOR DEVIC	EA	2
26	12	PADZZ	5961-00-107-0742	JAN2N3700	81349	TRANSISTOR	EA	1
26	13	PADZZ	5940-00-501-9419	1526-2	91833	TERMINAL,STUD	EA	4
26	14	PADZZ		RWR80S6800FM	81349	RESISTOR,FIXED,WIRE	EA	1
26	15	PADZZ	5905-01-035-5065	RCR05G103JS	81349	RESISTOR,FIXED,COMP	EA	1
26	16	PADZZ	5905-00-401-7428	RCR05G561JS	81349	RESISTOR,FIXED,COMP	EA	1
26	17	PADZZ	5905-00-110-7620	RCR07G102JS	81349	RESISTOR,FIXED,COMP	EA	1
26	18	PADZZ	5961-00-925-3777	JAN2N2907A	81349	TRANSISTOR	EA	1
26	19	PADZZ		SMA882676	80063	SEMICONDUCTOR DEVIC	EA	1
26	20	PADZZ	5905-00-126-6683	RCR07G332JS	81349	RESISTOR,FIXED,COMP	EA	1
26	21	PADZZ		SMA882675	80063	SEMICONDUCTOR DEVIC	EA	1
26	22	PADZZ	5961-00-764-2590	JAN2N2324A	81349	SEMICONDUCTOR DEVIC	EA	1
26	23	PADZZ	5961-00-752-6121	JAN1N753A	81349	SEMICONDUCTOR DEVIC	EA	1
26	24	PADZZ	5905-00-458-9348	RCR05G181JS	81349	RESISTOR,FIXED,COMP	EA	1
26	25	PADZZ	5945-00-283-8660	H16V1A700S	22490	RELAY,ARMATURE	EA	1
26	26	PADZZ	5905-00-116-8569	RCR20G8Z1JS	81349	RESISTOR,FIXED,COMP	EA	1
26	27	PADZZ		RWR81S390DFM	81349	RESISTOR,FIXED,WIRE	EA	1
26	28	PADZZ	5905-01-059-0546	RNR55C10R0FS	81349	RESISTOR,FIXED,FILM (SELECTED AT TEST)	EA	2
26	28	PADZZ	5905-01-057-0862	RNR55C20R0FS	81349	RESISTOR,FIXED,FILM (SELECTED AT TEST)	EA	2
26	28	PADZZ		RNR55C30K1FM	81349	RESISTOR,FIXED,FILM (SELECTED AT TEST)	EA	2
26	28	PADZZ	5905-01-027-1315	RNR55C40K2FS	81349	RESISTOR FIXED FILM (SELECTED AT TEST)	EA	2
26	28	PADZZ	5905-00-470-0028	RNR55C49R9FS	81349	RESISTOR,FIXED,FILM (SELECTED AT TEST)	EA	2
26	28	PADZZ	5905-00-370-0140	RNR55C60R4FS	81349	RESISTOR,FIXED,FILM (SELECTED AT TEST)	EA	2
26	28	PADZZ	5905-00-284-6080	RNR55C69R8FS	81349	RESISTOR,FIXED,FILM (SELECTED AT TEST)	EA	2
26	28	PADZZ	5905-00-547-8125	RNR55C80R6FS	81349	RESISTOR,FIXED,FILM (SELECTED AT TEST)	EA	2
26	28	PADZZ		RNR55C90R9FM	81349	RESISTOR,FIXED,FILM (SELECTED AT TEST)	EA	2
26	28	PADZZ	5905-00-463-8149	RNR55C1000FS	81349	RESISTOR,FIXED,FILM (SELECTED AT TEST)	EA	2
26	28	PADZZ	5905-00-481-8330	RNR55C1100FS	81349	RESISTOR,FIXED,FILM (SELECTED AT TEST)	EA	2
26	28	PADZZ	5905-01-015-9938	RNR55C1210FS	81349	RESISTOR,FIXED,FILM (SELECTED AT TEST)	EA	2

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
26	28	PADZZ	5905-00-419-5250	RNR55C1300FS	81349	RESISTOR,FIXED,FILM (SELECTED AT TEST)	EA	2
26	28	PADZZ	5905-00-004-6109	RNR55C1400FS	81349	RESISTOR,FIXED,FILM (SELECTED AT TEST)	EA	2
26	28	PADZZ		RNR55C1500FM	81349	RESISTOR,FIXED,FILM (SELECTED AT TEST)	EA	2
26	28	PADZZ		RNR55C1620FM	81349	RESISTOR,FIXED,FILM (SELECTED AT TEST)	EA	2
26	28	PADZZ	5905-00-471-2161	RNR55C1690FS	81349	RESISTOR FIXED FILM (SELECTED AT TEST)	EA	2
26	28	PADZZ	5905-00-457-8084	RNR55C1820FS	81349	RESISTOR,FIXED,FILM (SELECTED AT TEST)	EA	2
26	28	PADZZ	5905-00-419-5255	RNR55C1910FS	81349	RESISTOR,FIXED,FILM (SELECTED AT TEST)	EA	2
26	28	PADZZ	5905-00-445-1563	RNR55C2000FS	81349	RESISTOR,FIXED,FILM (SELECTED AT TEST)	EA	2
26	29	PADZZ		RNR55C2431FM	81349	RESISTOR,FIXED,FILM	EA	1
26	30	PADZZ	5910-00-236-8766	M39003/01-3094	81349	CAPACITOR,FIXED,ELE	EA	1
26	31	PADZZ	5905-00-433-1853	RCR05G220JS	81349	RESISTOR	EA	1
26	32	PADZZ	5962-00-584-0623	M38510/10201BIA	81349	MICROCIRCUIT,LINEAR	EA	1
26	33	PADZZ		M38510/10702BXC	81349	MICROCIRCUIT,5V REG	EA	1
26	34	PADZZ		RER40F15R0M	81349	RESISTOR,FIXED,WIRE	EA	1
26	35	PADZZ	5305-00-054-5636	MS51957-2	96906	SCREW,MACHINE	EA	2
26	36	PADZZ	5310-00-928-2690	MS35338-134	96906	WASHER,LOCK	EA	9
26	37	XDDZZ		SMC882688	80063	TERMINAL INSULATED	EA	1
26	38	XDDZZ		SMB882684	80063	TERM TUR UNINSUL	EA	1
26	39	PADZZ	5305-00-054-5638	MS51957-4	96906	SCREW,MACHINE	EA	3
26	40	PADZZ	5910-00-185-9590	K22A605	05397	CAPACITOR,FIXED,ELE	EA	1
26	41	PADZZ	5961-01-003-0584	ZN5679	04713	TRANSISTOR	EA	1
26	42	XDDZZ		SMB882678	80063	HEAT SINK XSTR	EA	2
26	43	XDDZZ		SMB882687	80063	INSULATOR HEAT SINK	EA	2
26	44	PADZZ		SMA882674	80063	SEMICONDUCTOR DEVIC	EA	1
26	45	XDDZZ		SMA882683	80063	SPACER	EA	1
26	46	PADZZ	5310-00-939-1061	MS35333-104	96906	WASHER,LOCK	EA	1
26	47	PADZZ	5961-00-262-0814	ZN6049	04713	TRANSISTOR	EA	1
26	48	PADZZ	5970-00-023-6246	TA2402A	06289	INSULATOR,PLATE	EA	1
26	49	PADZZ	5305-00-833-8613	MS18212-11	96906	SCREW,MACHINE	EA	4
26	50	XDDZZ	5310-00-087-0057	MS27183-2	96906	WASHER,FLAT	EA	7
26	51	XDDZZ		MS35206-321	96906	SCREW,MACHINE	EA	4
26	52	PADZZ	5940-00-050-2308	MS35431-3	96906	TERMINAL,LUG	EA	1
26	53	XDDZZ		SMC906085-5	80063	INSULATOR BUSHING	EA	5
26	54	XDDZZ		SMB882680	80063	BUSHING	EA	4
26	55	XDDZZ		SMB882681	80063	SPACER	EA	4

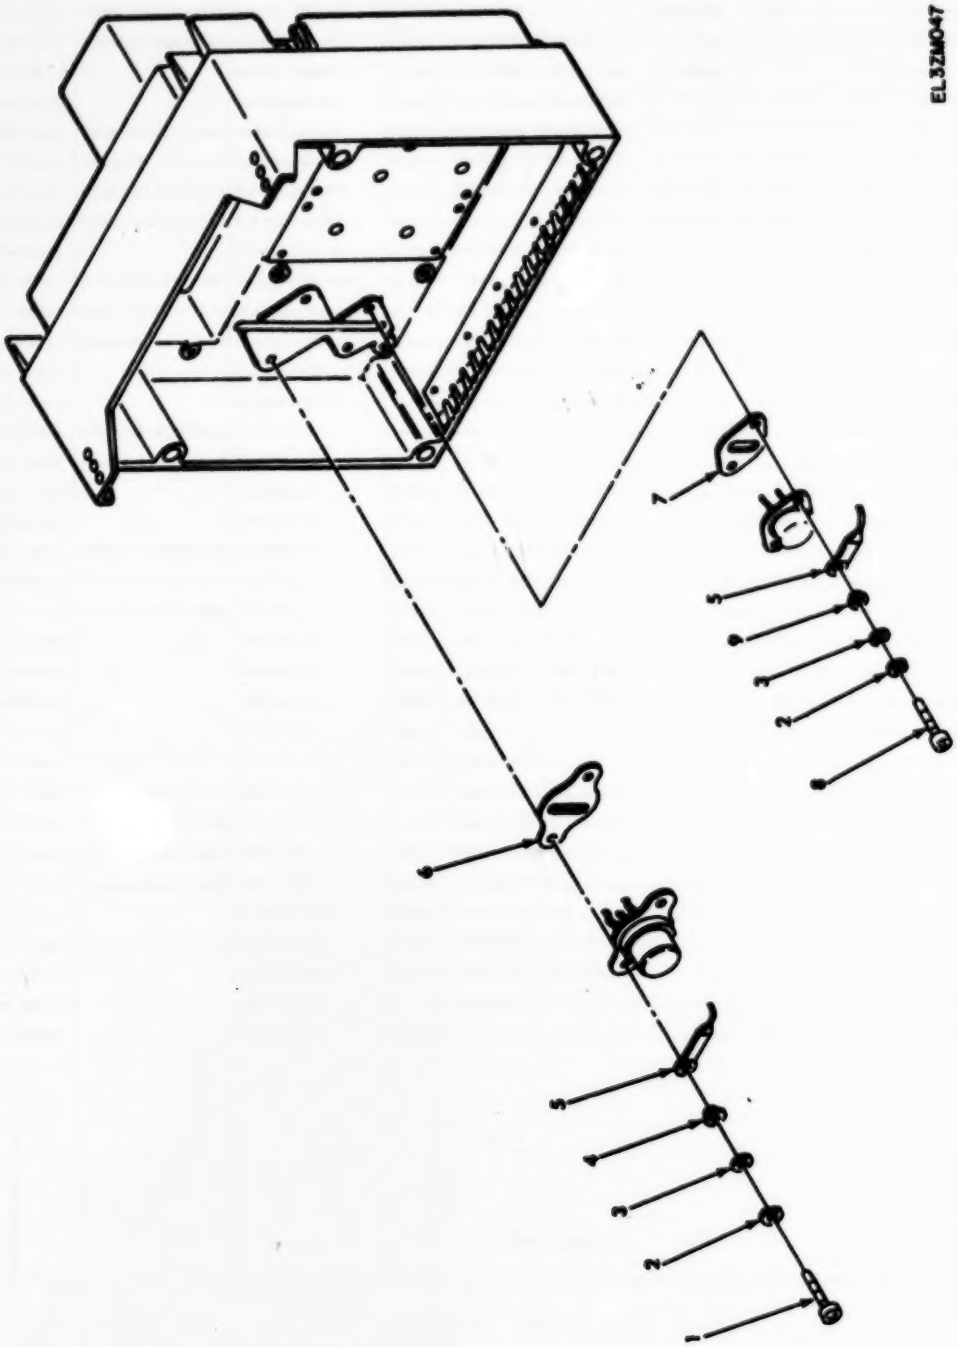

Figure 27. Surge Protector Transistor, and +9V Regulator Transistor

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 07 SURGE PROTECTOR TRANSISTOR		
27	1	PAHZZ	5305-00-054-5639	MS51957-5	96906	SCREW,MACHINE	EA	3
27	2	PAHZZ	5310-00-928-2690	MS35338-134	96906	WASHER,LOCK	EA	8
27	3	PAHZZ	5310-00-595-6761	MS15795-802	96906	WASHER,FLAT	EA	4
27	4	XBHZZ		SMC596085-6	80063	INSULATOR,BUSHING	EA	3
27	5	PAHZZ	5940-00-557-4398	MS25036-48	96906	TERMINAL,LUG	EA	2
27	6	PAHZZ	5970-00-952-1231	DM101	0B289	INSULATOR,PLATE	EA	1
						GROUP 08 +9 V REGULATOR TRANSISTOR		
27	7	XBHZZ	5970-00-023-6246	TA2402A	0B289	INSULATOR,PLATE	EA	1
27	8	PAHZZ	5305-00-054-5638	MS51957-4	96906	SCREW,MACHINE	EA	8
27	9	XBHZZ		SMC596085-5	80063	INSULATOR,BUSHING	EA	1

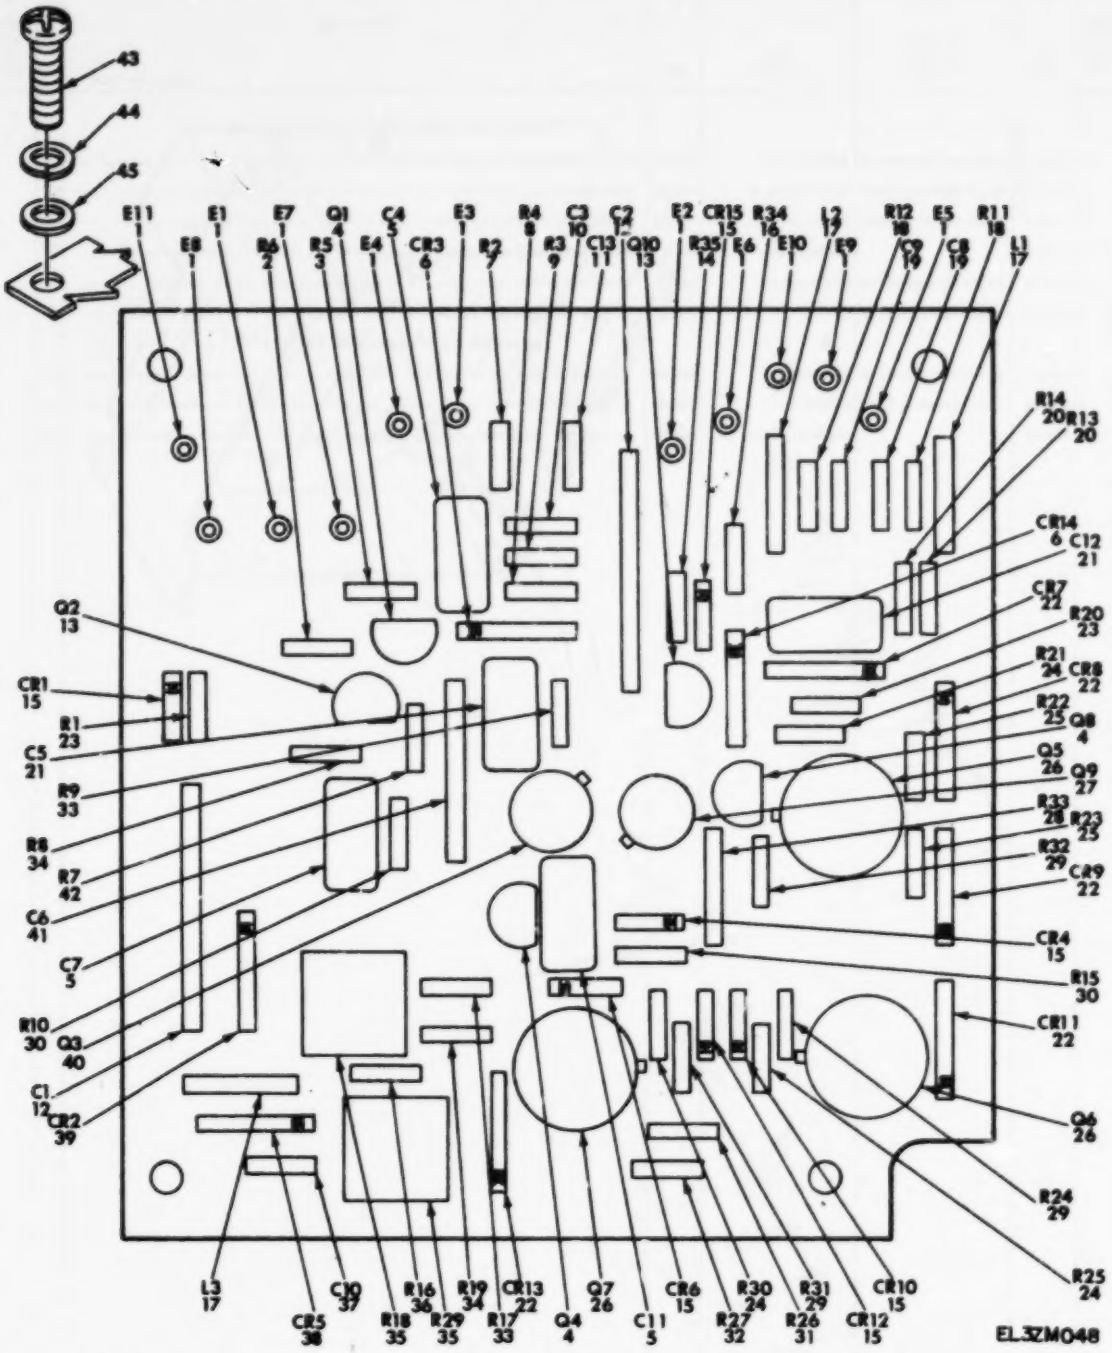

Figure 28. Circuit Card Modulator

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 09 CIRCUIT CARD MODULATOR		
28	1	PADZZ	5940-00-411-8492	203184	88245	TERMINAL,STUD	EA	11
28	2	PADZZ	5905-00-946-6352	RC05GF752J	81349	RESISTOR,FIXED,COMP	EA	1
28	3	PADZZ	5905-00-912-2815	RC05GF153J	81349	RESISTOR FIXED COMP	EA	1
28	4	PADZZ	5961-00-124-5245	SMA726658	80063	TRANSISTOR	EA	3
28	5	PADZZ	5910-00-082-4909	K1P35	05397	CAPACITOR,FIXED,ELE	EA	3
28	6	PADZZ	5961-01-024-2144	JAN1N5298	81349	SEMICONDUCTOR DEVIC	EA	2
28	7	PADZZ	5905-00-782-4108	RC05GF472J	81349	RESISTOR,FIXED,COMP	EA	1
28	8	PADZZ	5905-00-917-9525	RC05GF362J	81349	RESISTOR,FIXED,COMP	EA	1
28	9	PADZZ	5905-00-422-3798	RCR05G621JS	81349	RESISTOR,FIXED,COMP	EA	1
28	10	PADZZ		ML10S8302K	04222	CAPACITOR,FIXE	EA	1
28	11	PADZZ	5910-00-936-0530	ML10SC103K	04222	CAPACITOR,FIXED,CER	EA	1
28	12	PADZZ	5910-00-144-4381	CSR13F685KM	81349	CAPACITOR,FIXED,ELE	EA	2
	13	PADZZ	5961-00-134-1494	SMA726655	80063	TRANSISTOR	EA	2
28	14	PADZZ	5905-00-947-7759	RC05GF510J	81349	RESISTOR,FIXED,COMP	EA	1
28	15	PADZZ	5961-00-421-8882	JAN1N4531	81349	SEMICONDUCTOR DEVIC	EA	6
28	16	PADZZ	5905-00-945-5291	RC05GF681J	81349	RESISTOR,FIXED,COMP	EA	1
28	17	PADZZ	5950-00-059-5920	1025-20	99800	COIL,RADIO FREQUENC	EA	3
28	18	PADZZ	5905-00-914-2088	RC05GF512J	81349	RESISTOR,FIXED,COMP	EA	2
28	19	PADZZ		ML10SA101K	04222	CAPACITOR,FIXE	EA	2
	20	PADZZ	5905-00-948-2393	RC05GF432J	81349	RESISTOR,FIXED,COMP	EA	2
	21	PADZZ	5910-00-208-4406	SMA595889-2	80063	CAPACITOR,FIXED,ELE	EA	2
	22	PADZZ		JAN1N5290	81349	SEMICONDUCTOR	EA	5
	23	PADZZ	5905-00-782-4109	RC05GF682J	81349	RESISTOR,FIXED,COMP	EA	2
	24	PADZZ	5905-00-923-3534	RL05GF102J	81349	RESISTOR,FIXED,COMP	EA	3
	25	PADZZ	5905-00-981-1433	RC05GF241J	81349	RESISTOR,FIXED,COMP	EA	2
	26	PADZZ	5961-00-494-6091	JAN2N2919	81349	SEMICONDUCTOR DEVIC	EA	3
	27	PADZZ	5961-00-925-3777	JAN2N2907A	81349	TRANSISTOR	EA	1
	28	PADZZ	5905-00-683-2239	RCU7GF201J	81349	RESISTOR,FIXED,COMP	EA	1
	29	PADZZ	5905-00-922-7215	RC05GF103J	81349	RESISTOR,FIXED,COMP	EA	3
	30	PADZZ	5905-00-942-3023	RC05GF514J	81349	RESISTOR,FIXED,COMP	EA	2
	31	PADZZ	5905-00-954-5156	RC05GF273J	81349	RESISTOR,FIXED,COMP	EA	1
	32	PADZZ	5905-00-951-4682	RC05GF242J	81349	RESISTOR FIXED COMP	EA	1
	33	PADZZ	5905-00-917-9524	RC05GF202J	81349	RESISTOR,FIXED,COMP	EA	2
	34	PADZZ	5905-00-421-8918	RCR05G302JS	81349	RESISTOR,FIXED,COMP	EA	2
	35	PADZZ		300-2K	84048	RESISTOR,VARIABLE,W	EA	2
	36	PADZZ	5905-00-914-4054	RC05GF243J	81349	RESISTOR,FIXED,COMP	EA	1
	37	PADZZ	5910-00-458-5804	ML10SB102K	04222	CAPACITOR,FIXED,CER	EA	1
	38	PADZZ	5961-00-201-7134	SZA41	13327	SEMICONDUCTOR DEVIC	EA	1
	39	PADZZ	5961-00-204-8188	1N4926A	80131	SEMICONDUCTOR DEVIC	EA	1
	40	PADZZ		553745	04713	TRANSISTOR	EA	1

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
28	41	PADZZ	5910-00-314-3852	M39003/01-3108	81349	CAPACITOR,FIXED,ELE	EA	1
28	42	PADZZ	5905-00-948-2596	RC05GF101J	81349	RESISTOR FIXED C	EA	1
28	43	PAHZZ	5305-00-763-3357	MS51959-6	96906	SCREW,MACHINE	EA	4
28	44	PAHZZ	5310-00-928-2690	MS35338-134	96906	WASHER,LOCK	EA	8
28	45	XDHZZ		SMC617837-3	80063	WASHER,FLAT	EA	6

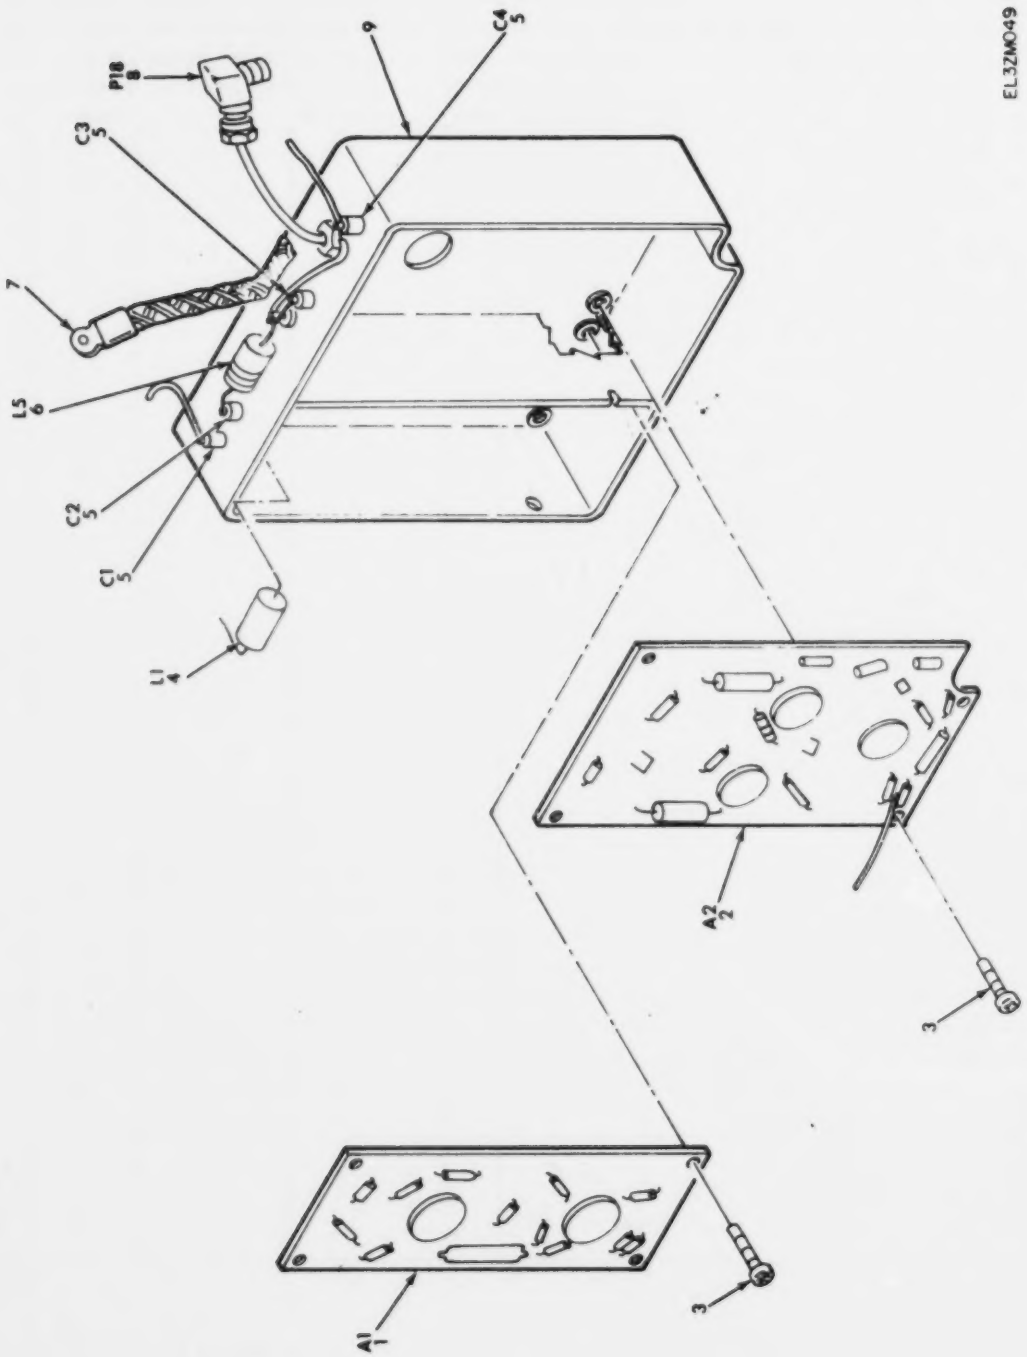

Figure 29. Power Amplifier Exciter Assembly

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 10 POWER AMPLIFIER EXCITER ASSEMBLY		
29	1	XAUDL		SM8603942	80063	EXCITER,L	EA	1
29	2	XAUDL		SM8632271	80063	POWER AMPLIFIER,L	EA	1
29	3	PAMZZ	5305-01-077-8514	SH-B-693147-S	80063	SCREW,MACHINE	EA	4
29	4	PADZZ	5915-00-116-4766	70202-1	82142	SUPPRESSOR,PARASITI	EA	1
29	5	PADZZ	5910-00-782-5000	2404-00735T015M	72982	CAPACITOR,FIXED,CER	EA	4
29	6	PAMZZ	5950-00-734-3940	MS18130-8	96906	COIL,RADIO FREQUENC	EA	1
29	7	PAMZZ		MS25036-52	96906	TERMINAL,LUG	EA	1
29	8	PADZZ	5935-00-762-0414	64902-000-801	94375	CONNECTOR,PLUG,ELEC	EA	1
29	9	XAMZZ		SM8632244	80063	LIST OF MATERIAL	EA	1

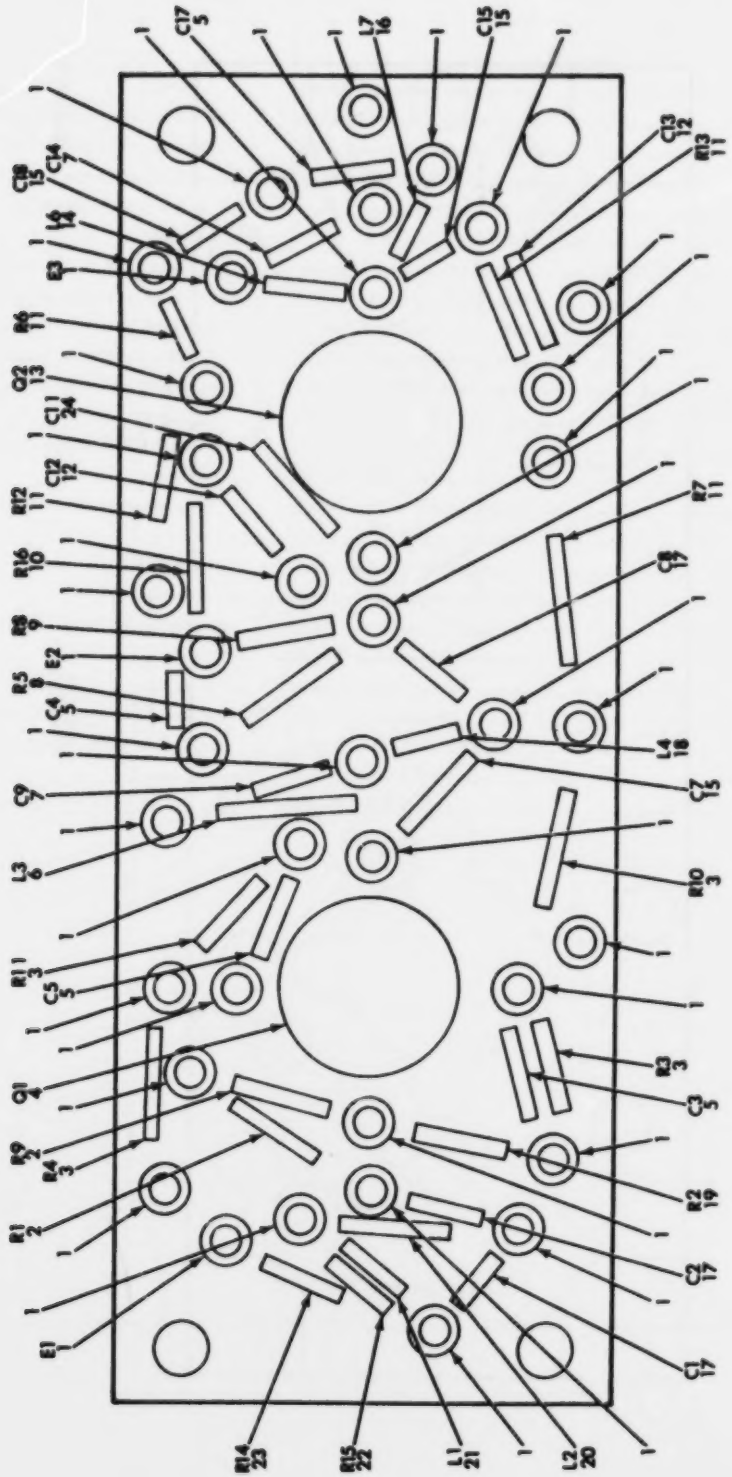

Figure 30. Exciter (Sheet 1 of 2)

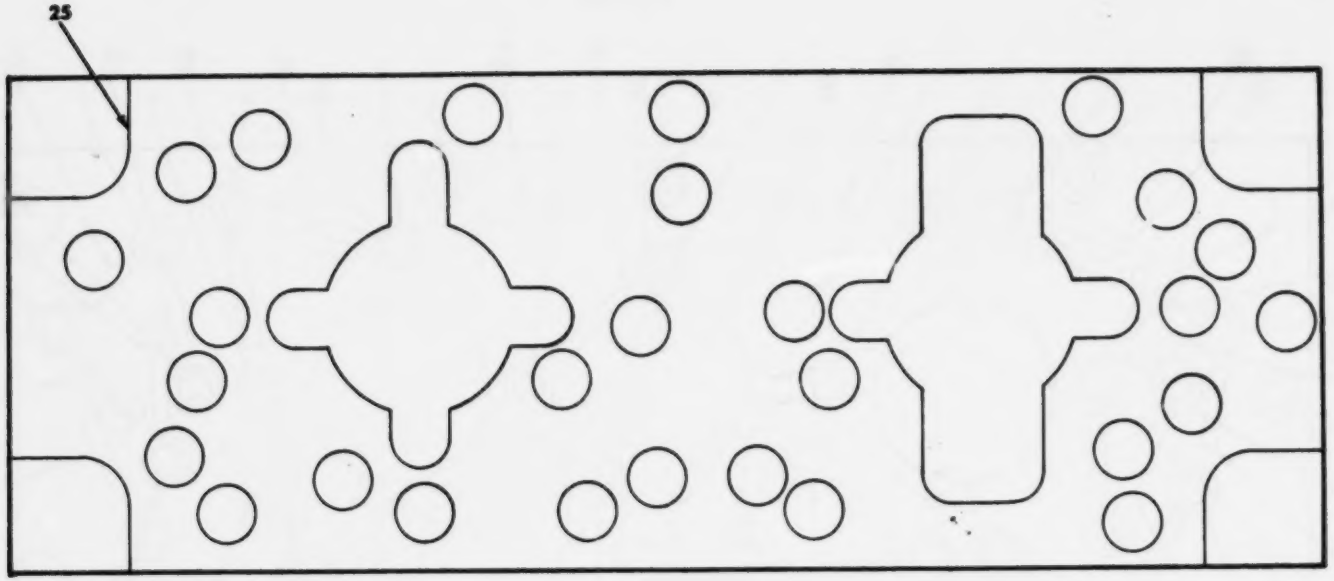

Figure 30. Exciter (Sheet 2 of 2)

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 1001 EXCITER		
30	1	XDDZZ		2003A4	88245	TERMINAL,STU	EA	38
30	2	PADZZ	5905-00-683-2238	RL07GF103J	81349	RESISTOR,FIXED,COMP	EA	2
30	3	PADZZ	5905-00-683-2239	RC07GF201J	81349	RESISTOR,FIXED,COMP	EA	4
30	4	PADZZ	5961-01-059-6780	SMA726663	80063	TRANSISTOR	EA	1
30	5	PADZZ	5910-00-160-6241	UY121032	73899	CAPACITOR,FIXED,CER	EA	4
30	6	XDDZZ		SMA595911-38	80063	COIL,RADIO FREQUENC	EA	1
30	7	PADZZ	5910-00-246-2525	FCJ157D	73899	CAPACITOR,FIXED,CER	EA	2
30	8	PADZZ	5905-00-120-9134	RCR07G471J5	81349	RESISTOR,FIXED,COMP	EA	1
30	9	PADZZ	5905-00-683-7720	RC07GF510J	81349	RESISTOR,FIXED,COMP	EA	1
30	10	PADZZ	5905-00-951-7021	240E1225	56289	RESISTOR,FIXED,WIRE	EA	1
30	11	PADZZ	5905-00-683-7721	RC07GF101J	81349	RESISTOR,FIXED,COMP	EA	4
30	12	PADZZ		UY12332M	73899	CAPACITOR,FIXE	EA	2
30	13	PADZZ	5961-00-168-4261	PNT6862	01281	TRANSISTOR	EA	1
30	14	XDDZZ		SMA595911-40	80063	COIL,AIR	EA	2
30	15	PADZZ	5910-00-099-9740	UY021006	73899	CAPACITOR,FIXED,CER	EA	3
30	16	XDDZZ		SMA595911-37	80063	COIL,RADIO FREQUENC	EA	1
30	17	PADZZ		UY024706	73899	CAPACITOR,FIXED	EA	3
30	18	XDDZZ		SMA595911-35	80063	COIL,RADIO FREQUENC	EA	1
30	19	PADZZ	5905-00-805-9713	RC07GF431J	81349	RESISTOR,FIXED,COMP	EA	1
30	20	XDDZZ		SMA595911-34	80063	COIL,RADIO FREQUENC	EA	1
30	21	XDDZZ		SMA595911-36	80063	COIL,AIR	EA	1
30	22	PADZZ	5905-00-853-8921	RC05GF750J	81349	RESISTOR,FIXED,COMP	EA	1
30	23	PADZZ	5905-00-931-0744	RC05GF150J	81349	RESISTOR,FIXED,COMP	EA	1
30	24	PADZZ		UY03150F	73899	CAPACITOR,FIXE	EA	1
30	25	PAUZZ	5970-01-077-8328	SM-D-882566	80063	INSULATOR	EA	1

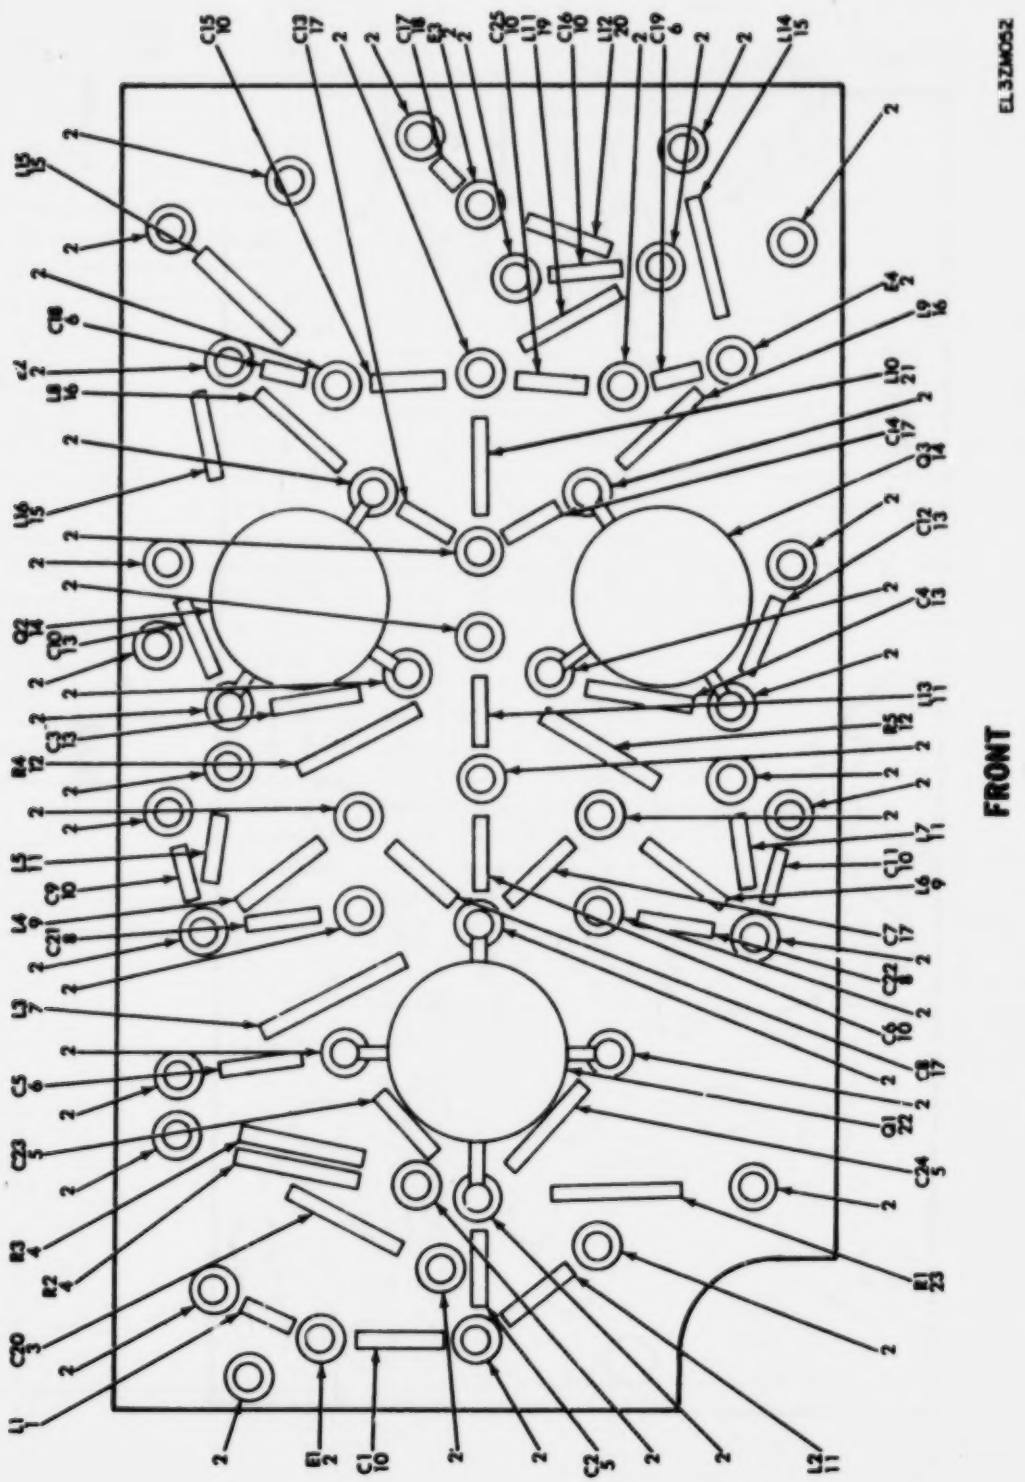

Figure 31. Power Amplifier (Sheet 1 of 2)

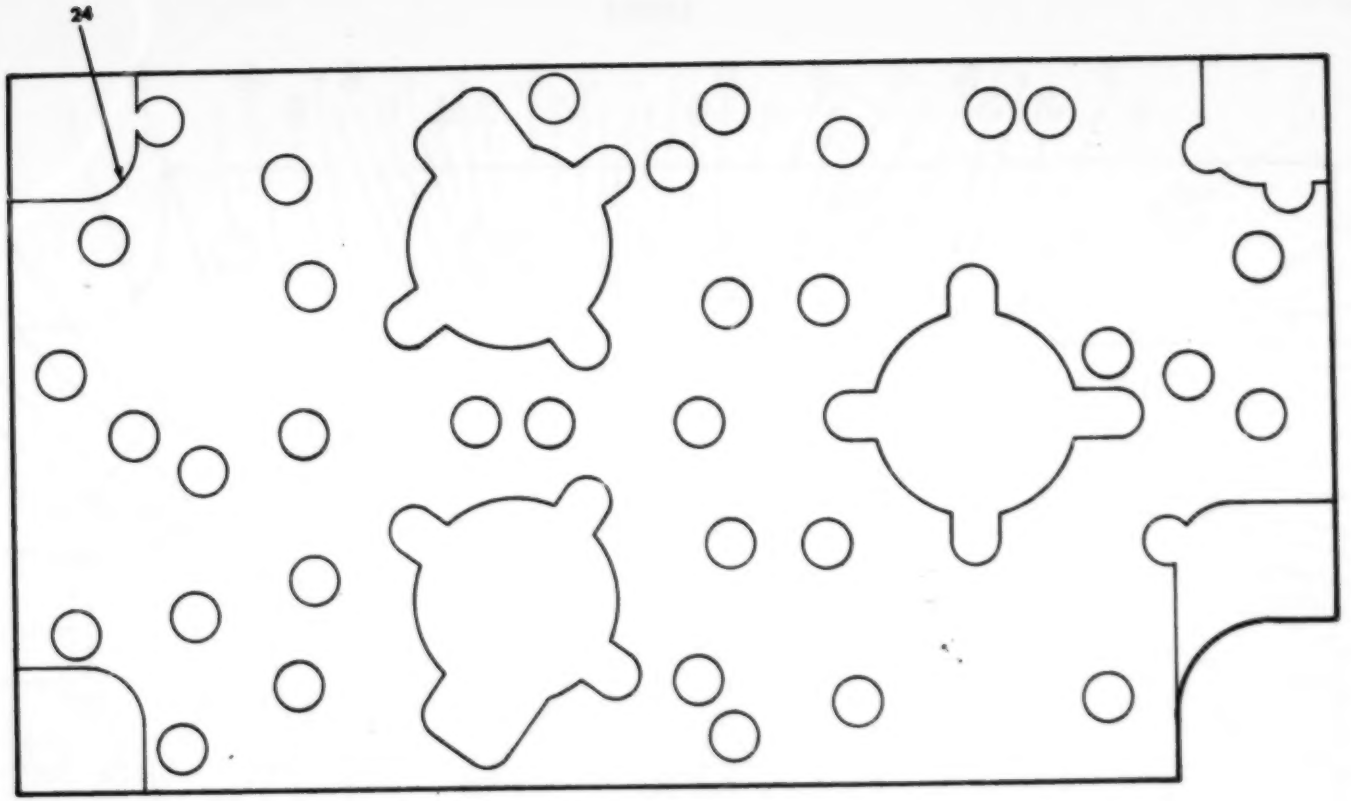

Figure 31. Power Amplifier (Sheet 2 of 2)

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 1002 POWER AMPLIFIER		
31	1	XUDZZ		SMA595911-36	80063	COIL,AIR	EA	1
31	2	XDDZZ		200344	88245	TERMINAL,STU	EA	49
31	3	PADZZ	5910-01-077-8327	SM-A-618670-1	80063	CAPACITOR,FIXE	EA	1
31	4	PADZZ	5905-00-682-4099	RC07GF432J	81349	RESISTOR,FIXED,COMP	EA	2
31	5	PADZZ	5910-00-204-8220	UY021U0F	73899	CAPACITOR,FIXED,CER	EA	3
31	6	PADZZ	5910-00-246-2525	FCJ157D	73899	CAPACITOR,FIXED,CER	EA	5
31	7	XUDZZ		SMA595911-39	80063	COIL,AIR	EA	1
31	8	PADZZ		UY023300	73899	CAPACITOR,FIXED	EA	2
31	9	XDDZZ		SMA595911-35	80063	COIL,RADIO FREQUENC	EA	2
31	10	PADZZ		UY024700	73899	CAPACITOR,FIXED	EA	7
31	11	XDDZZ		SMA595911-33	80063	COIL,RADIO FREQUENC	EA	4
31	12	PADZZ	5905-00-240-9393	RLR07C4R7J5	81349	RESISTOR,FIXED,COMP	EA	2
31	13	PADZZ		UY031S0F	73899	CAPACITOR,FIXE	EA	4
31	14	PADZZ	5961-01-077-8571	SM-A-618677-1	80063	SEMICONDUCTOR DEVIC	EA	1
31	15	PADZZ	5915-00-116-2760	70202-1	02142	SUPPRESSOR,PARASITI	EA	3
31	16	XDDZZ		SMA595911-34	80063	COIL,RADIO FREQUENC	EA	2
31	17	PADZZ	5910-00-160-6241	UY121032	73899	CAPACITOR,FIXED,CER	EA	4
31	18	PADZZ	5910-00-977-5531	UY022200	73899	CAPACITOR,FIXED,CER	EA	1
31	19	XUDZZ		SMA595911-70	80063	COIL,RADIO FREQUENC (SELECT-AT-TEST)	EA	1
31	19	XDDZZ		SMA595911-71	80063	COIL,AIR (SELECT-AT-TEST)	EA	1
31	20	XUDZZ		SMA595911-77	80063	COIL,AIR (SELECT-AT-TEST)	EA	1
31	20	XDDZZ		SMA595911-72	80063	COIL,AIR (SELECT-AT-TEST)	EA	1
31	21	XUDZZ		SMA595911-75	80063	COIL,AIR (SELECT-AT-TEST)	EA	1
31	21	XDDZZ		SMA595911-70	80063	COIL,RF (SELECT-AT-TEST)	EA	1
31	22	PADZZ		SM-A-602569	80063	TRANSISTOR	EA	1
31	23	PADZZ	5905-00-802-6730	RC07GF470J	81349	RESISTOR,FIXED,COMP	EA	1
31	24	PADZZ	5970-01-077-8330	SM-D-602672	80063	INSULATOR	EA	1

NOTE: LATEST NATIONAL STOCK NUMBER AND PART NUMBER ASSIGNMENTS ARE INCLUDED AT END OF INDEX.

STOCK NUMBER	FIGURE NO.	ITEM NO.
5905-00-004-6109	26	28
5905-00-006-5561	11	3
5905-00-006-6975	15	1
5910-00-007-2002	13	26
5905-00-012-0325	15	2
5305-00-012-0719	3	100
5910-00-013-5656	9	42
5970-00-023-6240	26	48
5970-00-023-6246	27	7
5940-00-050-2306	1	26
5940-00-050-2308	26	52
5905-00-051-0161	25	3
5305-00-054-5635	3	16
5305-00-054-5635	12	1
5305-00-054-5635	16	1
5305-00-054-5636	18	10
5305-00-054-5636	23	7
5305-00-054-5636	26	35
5305-00-054-5637	3	71
5305-00-054-5637	7	12
5305-00-054-5637	17	12
5305-00-054-5637	18	5
5305-00-054-5637	23	3
5305-00-054-5638	18	12
5305-00-054-5638	26	39
5305-00-054-5638	27	8
5305-00-054-5639	17	11
5305-00-054-5639	27	1
5305-00-054-5640	17	1
5305-00-054-5641	17	21
5305-00-054-5643	18	27
5305-00-054-5647	1	37
5305-00-054-5647	3	1
5305-00-054-5648	1	24
5305-00-054-5648	17	31
5305-00-054-5650	3	73
5305-00-054-6850	3	38
5910-00-056-4864	9	21
5910-00-056-4864	10	22
5910-00-056-4864	13	23
5910-00-056-4864	14	29
5945-00-056-8848	17	18
5945-00-056-8848	18	22
5945-00-056-8850	1	52
5945-00-056-8850	17	32
5945-00-056-8850	18	23
5305-00-057-3800	3	28
5930-00-059-4856	3	20
5950-00-059-5920	19	16
5950-00-059-5920	20	37
5950-00-059-5920	28	17
5950-00-059-5921	22	9
5305-00-068-5414	3	46
5320-00-081-7418	24	3
5910-00-082-4909	28	5
5310-00-087-0057	26	50
5821-00-091-9160	3	6
5821-00-091-9164	18	18
5821-00-091-9165	3	68
5821-00-091-9167	3	72
5910-00-099-9746	30	15
5320-00-106-5895	3	65
5961-00-107-0742	26	12
5905-00-110-7020	26	17
5920-00-110-7792	1	38
5920-00-110-7800	1	44
5985-00-110-9288	3	7
5935-00-111-1861	17	35
5310-00-113-3871	3	17
5310-00-113-8412	3	19
5935-00-114-8767	18	13
5935-00-115-0514	3	62
5930-00-115-8522	3	65
5930-00-115-8563	3	87
3120-00-116-1474	3	48
5905-00-116-2394	10	15
5905-00-116-2394	19	36
5905-00-116-2394	20	27
5915-00-116-2766	23	14
5915-00-116-2766	29	4
5915-00-116-2766	31	15
5930-00-116-2767	3	32
5930-00-116-2768	3	101
5905-00-116-8569	26	26
5905-00-120-9154	30	8
5961-00-124-5245	9	11
5961-00-124-5245	10	44
5961-00-124-5245	13	8
5961-00-124-5245	14	44
5961-00-124-5245	15	22
5961-00-124-5245	19	34
5961-00-124-5245	20	28
5961-00-124-5245	28	4
5310-00-126-0014	1	18
5962-00-126-0493	9	16
5905-00-126-6683	26	20
5961-00-127-9362	1	8
5961-00-134-1494	9	4
5961-00-134-1494	10	10
5961-00-134-1494	11	4
5961-00-134-1494	12	13
5961-00-134-1494	13	25
5961-00-134-1494	14	4
5961-00-134-1494	15	7
5961-00-134-1494	16	13
5961-00-134-1494	19	42
5961-00-134-1494	20	13
5961-00-134-1494	21	10
5961-00-134-1494	28	13
5935-00-134-5337	3	81
5935-00-134-5337	17	26
5935-00-134-5355	17	4
5950-00-135-4362	12	21
5950-00-135-4362	16	21
5961-00-136-4162	1	7
5905-00-141-1131	14	23
5821-00-142-5546	7	3
5821-00-142-5549	7	2
5305-00-143-1869	1	41
5910-00-144-4381	28	12
5905-00-146-4440	3	33
5961-00-148-4501	23	15
6680-00-150-6914	3	55
5330-00-150-9433	1	46
5340-00-151-7036	3	43
5910-00-159-6881	8	59
5910-00-159-6881	9	71
5910-00-159-6881	10	46
5910-00-159-6881	14	15
5910-00-159-6881	17	47
5910-00-159-6881	19	41
5910-00-159-6881	20	40
5910-00-159-6881	22	15
5950-00-160-6157	8	17
5950-00-160-6159	8	32
5950-00-160-6160	8	47
5910-00-160-6241	30	5
5910-00-160-6241	31	17
5940-00-168-3375	17	39
5910-00-168-3466	8	27
5910-00-168-3466	9	69
5910-00-168-3466	11	14
5910-00-168-3466	12	14
5910-00-168-3466	13	7
5910-00-168-3466	14	14
5910-00-168-3466	16	14
5910-00-168-3466	17	38
5910-00-168-3466	20	38
5821-00-168-3621	1	22
5821-00-168-3623	17	34
5821-00-168-3624	17	36
5821-00-168-3626	3	83
5995-00-168-4021	17	27
5999-00-168-4022	17	7
5935-00-168-4125	17	33
5961-00-168-4201	30	13
5970-00-168-4271	17	16
5935-00-168-4418	3	80
5320-00-168-7323	17	3
5315-00-168-7329	1	27

STOCK NUMBER	FIGURE NO.	ITEM NO.
5821-00-168-7745	1	30
5935-00-168-7997	17	25
5325-00-171-4938	3	34
5365-00-174-5317	23	12
5910-00-176-7322	12	19
5910-00-176-7342	16	19
5910-00-176-7335	12	26
5910-00-176-7339	16	26
5975-00-177-2133	1	48
5821-00-177-2907	7	6
5821-00-177-3511	17	30
5905-00-177-7486	14	26
5905-00-180-8301	9	14A
5905-00-180-8301	10	6
5905-00-180-8301	12	16
5905-00-180-8301	13	34
5905-00-180-8301	14	5
5905-00-180-8301	15	14
5905-00-180-8301	16	16
5905-00-180-8303	20	35
5905-00-180-8315	13	31
5905-00-180-8315	14	40
5905-00-180-8315	12	31
5905-00-180-8315	13	33
5310-00-181-6034	16	31
5365-00-182-4640	17	42
5315-00-182-6197	1	28
5315-00-182-6197	8	20
5315-00-182-6197	9	26
5340-00-184-9709	10	26
5110-00-183-7537	1	34
5930-00-185-9588	3	11
5910-00-183-9590	9	28
5905-00-195-6800	26	40
5905-00-197-0423	10	41
5910-00-201-0948	14	39
5910-00-201-0950	9	60
5910-00-201-0953	9	39
5910-00-201-0955	8	24
5910-00-201-7146	9	13
5961-00-201-7132	13	27
5961-00-201-7132	8	29
5961-00-201-7132	9	50
5961-00-201-7133	19	30
5961-00-201-7133	9	36
5961-00-201-7134	22	10
5961-00-201-7134	9	48
5950-00-201-7486	28	38
5950-00-201-7489	8	22
5950-00-201-7503	8	23
5950-00-201-7516	10	11
5961-00-201-7517	10	29
5961-00-201-7517	19	38
5910-00-201-7551	20	42
5910-00-203-3712	25	6
5910-00-203-3735	13	1
5961-00-204-8168	8	15
5910-00-204-8220	28	39
5910-00-206-0287	31	5
5910-00-206-0382	15	18
5950-00-206-0392	15	4
5910-00-206-0440	15	28
5910-00-206-0440	19	4
5910-00-208-4406	25	8
5962-00-211-1260	28	21
5365-00-216-1230	9	20
5962-00-220-9042	12	6
5935-00-223-2833	10	40
5905-00-231-2917	1	47
5905-00-233-4532	14	7
5910-00-236-8760	5	2
5935-00-245-8557	26	30
5340-00-245-4820	1	21
5340-00-245-4820	17	9
5910-00-246-4525	43	8
5310-00-246-2525	30	7
5905-00-246-9393	31	6
5905-00-247-2349	31	14
5961-00-259-6161	14	14
	19	21

STOCK NUMBER	FIGURE NO.	ITEM NO.
5961-00-462-0814	26	47
5945-00-283-8860	26	25
5905-00-284-6080	26	28
5910-00-285-2265	25	12
5905-00-286-5392	6	5
5950-00-295-5659	10	21
5950-00-296-4735	8	28
5950-00-296-4735	19	22
5950-00-296-4735	20	4
5905-00-303-9848	6	10
5910-00-314-3852	28	41
5905-00-328-1335	3	23
5905-00-350-7775	12	30
5905-00-350-7775	13	34
5905-00-350-7775	16	30
5905-00-350-7775	20	7
5910-00-359-5476	8	38
5905-00-370-0140	26	26
5905-00-401-7424	11	11
5905-00-401-7424	13	9
5905-00-401-7425	13	37
5905-00-401-7426	12	11
5905-00-401-7426	13	6
5905-00-401-7426	16	11
5905-00-401-7427	14	13
5905-00-401-7428	26	16
5905-00-401-7429	8	36
5305-00-402-2066	1	15
5905-00-403-8637	14	27
5950-00-405-3735	19	1
5905-00-407-0082	14	36
5905-00-407-0082	22	14
5905-00-407-0083	18	32
5905-00-407-0088	12	28
5905-00-407-0088	13	34
5905-00-407-0088	16	28
5905-00-407-0089	10	33
5905-00-407-0089	15	9
5961-00-408-0527	8	10
5961-00-408-0527	10	23
5961-00-408-0527	20	10
5905-00-409-2975	13	28
5905-00-410-1577	5	7
5305-00-410-6549	1	40
5905-00-411-1891	14	30
5940-00-411-8492	4	1
5940-00-411-8492	5	1
5940-00-411-8492	6	7
5940-00-411-8492	9	9
5940-00-411-8492	10	3
5940-00-411-8492	19	2
5940-00-411-8492	20	20
5940-00-411-8492	22	1
5940-00-411-8492	25	1
5940-00-411-8492	26	9
5940-00-411-8492	28	1
5905-00-412-0760	14	2
5905-00-419-5250	26	26
5905-00-419-5255	26	28
5935-00-419-5417	17	8
5961-00-421-8882	4	3
5961-00-421-8882	6	1
5961-00-421-8882	8	31
5961-00-421-8882	9	6
5961-00-421-8882	10	8
5961-00-421-8882	11	21
5961-00-421-8882	13	3
5961-00-421-8882	14	6
5961-00-421-8882	15	20
5961-00-421-8882	19	25
5961-00-421-8882	20	21
5961-00-421-8882	26	11
5961-00-421-8882	28	15
5905-00-421-8918	9	43
5905-00-421-8918	19	17
5905-00-421-8918	28	34
5905-00-422-3798	9	31
5905-00-422-3798	28	9
5365-00-432-3584	3	12
5910-00-432-8218	24	5

STOCK NUMBER	FIGURE NO.	ITEM NO.
5905-00-433-1853	26	3
5905-00-433-1853	26	31
5320-00-433-4073	22	17
5910-00-433-5446	9	14
5910-00-433-5446	13	18
5910-00-433-5446	14	37
5910-00-433-5446	28	6
5905-00-433-6483	15	39
5305-00-439-2737	1	12
5905-00-445-1563	26	28
5305-00-448-6547	1	51
5910-00-448-9248	9	8
5910-00-451-4091	9	37
5962-00-454-2039	9	17
5905-00-457-3979	26	1
5905-00-457-8084	26	28
5910-00-458-5804	8	43
5910-00-458-5804	21	7
5910-00-458-5804	22	8
5910-00-458-5804	28	37
5905-00-458-9346	14	18
5905-00-458-9348	26	24
5905-00-458-9500	10	4
5905-00-458-9500	12	22
5905-00-458-9500	13	16
5905-00-458-9500	16	22
5905-00-458-9500	20	33
5905-00-458-9500	26	10
5910-00-460-0850	3	27
5910-00-460-0850	9	12A
5910-00-460-0850	10	42
5910-00-460-0850	11	13
5910-00-460-0850	15	26
5999-00-463-3168	17	6
5999-00-463-3168	18	14
5962-00-463-3207	9	22
5905-00-463-8149	26	28
5905-00-465-5557	21	1
5905-00-466-1215	14	31
5905-00-466-1217	14	17
5905-00-466-1219	8	48
5340-00-468-1084	1	23
5961-00-469-2417	11	29
5905-00-470-0028	26	26
5905-00-470-0369	13	34
5905-00-470-0369	14	22
5905-00-470-9163	9	24
5905-00-470-9480	9	45
5905-00-470-9480	15	30
5905-00-471-2161	26	28
5905-00-471-2226	10	38
5905-00-471-2226	11	10
5905-00-481-8330	26	26
5910-00-489-9990	24	10
5905-00-490-0247	25	7
5905-00-492-7607	14	33
5961-00-494-6091	28	26
5910-00-495-0042	11	15
5910-00-495-0042	26	8
5999-00-497-9274	1	20
5999-00-497-9274	3	79
5999-00-497-9274	17	24
5940-00-501-9419	26	13
5910-00-513-0972	15	32
5930-00-520-5179	3	89
5910-00-526-7810	8	37
5961-00-526-7961	19	6
5961-00-526-7974	21	9
5961-00-526-7975	25	2
5910-00-526-7983	8	6
5910-00-526-7983	20	4
5910-00-526-8004	8	12
5910-00-526-8005	8	9
5310-00-543-4652	18	16
5905-00-547-8125	26	28
5955-00-548-1397	9	41
5940-00-549-7247	18	17
5940-00-549-7247	23	20
5910-00-550-1691	8	44

STOCK NUMBER	FIGURE NO.	ITEM NO.
5310-00-550-3715	1	25
5962-00-551-9428	9	70
5940-00-557-4396	27	5
5962-00-584-0623	26	32
5310-00-595-6211	3	21
5310-00-595-6761	7	14
5310-00-595-6761	17	13
5310-00-595-6761	27	3
5365-00-598-1493	3	4
5905-00-617-5096	10	31
5905-00-617-5096	14	28
5315-00-619-3959	3	64
5310-00-676-8061	3	10
5320-00-680-4039	17	40
5905-00-682-4097	21	2
5905-00-682-4099	31	4
5905-00-683-2238	30	2
5905-00-683-2239	28	28
5905-00-683-2239	30	3
5905-00-683-2246	9	40
5905-00-683-7720	30	9
5905-00-683-7721	30	11
5905-00-683-7723	11	2
5905-00-686-4528	23	18
5905-00-686-0994	15	33
5905-00-689-1496	14	20
5905-00-689-8777	11	23
5905-00-702-4439	9	19
3020-00-704-9698	3	95
5950-00-711-2692	9	57
5950-00-711-2692	12	18
5950-00-711-2692	13	10
5950-00-711-2692	14	35
5950-00-711-2692	16	16
5950-00-716-6085	25	4
5305-00-717-6950	2	6
5305-00-717-6950	3	44
5305-00-717-6955	3	51
5305-00-719-5342	2	11
5305-00-719-5349	2	8
5365-00-720-8064	3	39
5310-00-722-5998	1	42
5905-00-723-5251	9	38
5821-00-724-1686	1	4
5821-00-724-1691	17	19
5821-00-724-1707	7	5
5821-00-724-1711	23	1
5905-00-726-5344	21	3
5905-00-726-6435	21	6
5821-00-727-4249	18	3
5821-00-727-4253	18	2
5305-00-727-8833	17	17
5305-00-727-8833	18	25
5935-00-728-5605	23	19
5821-00-728-8084	18	4
5950-00-734-3940	29	6
5905-00-752-3338	11	19
5905-00-752-3340	21	15
5961-00-752-6121	26	23
5905-00-761-5758	12	25
5905-00-761-5758	13	13
5905-00-761-5758	14	25
5905-00-761-5758	16	25
5905-00-761-5758	22	11
5935-00-762-0412	23	10
5935-00-762-0414	29	8
5935-00-763-0858	17	23
5305-00-763-3357	28	43
5961-00-764-2590	26	22
5305-00-764-2964	1	29
5305-00-764-2964	18	24
5305-00-770-2579	3	8
5910-00-771-0183	15	25
5905-00-774-8323	5	8
5905-00-782-4103	8	41A
5905-00-782-4103	9	44
5905-00-782-4103	11	7
5905-00-782-4104	8	41A
5905-00-782-4105	8	2
5905-00-782-4105	9	66

STOCK NUMBER	FIGURE NO.	ITEM NO.
5905-00-782-4106	9	30
5905-00-782-4107	8	53
5905-00-782-4107	19	28
5905-00-782-4108	8	4
5905-00-782-4108	9	5
5905-00-782-4108	28	7
5905-00-782-4109	8	46
5905-00-782-4109	9	7
5905-00-782-4109	11	17
5905-00-782-4109	28	23
5910-00-782-5000	18	19
5910-00-782-5000	29	5
5935-00-782-6166	23	9
5935-00-782-6166	24	6
5905-00-801-2377	10	13
5905-00-802-6730	31	23
5905-00-805-9713	30	19
5315-00-807-7684	3	84
5305-00-812-6079	3	99
5905-00-816-8554	4	2
5961-00-823-5975	26	5
5305-00-833-8613	26	49
5310-00-837-1381	1	45
5910-00-838-9421	23	17
5961-00-847-5246	26	4
5961-00-848-5808	17	43
5961-00-848-5808	18	11
5905-00-853-8921	19	18
5905-00-853-8921	30	22
5315-00-865-9667	3	13
5910-00-879-6053	22	7
5355-00-880-5546	2	10
5310-00-880-7010	17	5
5310-00-880-7010	18	15
5310-00-880-7010	23	13
5305-00-884-1366	12	4
5305-00-884-1366	16	4
5905-00-889-0229	11	20
5910-00-889-4618	23	16
5965-00-891-7249	5	9
5950-00-892-8301	14	23
5950-00-892-8301	16	23
5965-00-897-2155	8	18
5905-00-897-2164	8	19
5910-00-901-3957	24	1
5905-00-902-0343	5	6
5950-00-902-2375	9	55
5950-00-902-2375	13	30
5950-00-902-2375	14	8
5920-00-903-1008	1	43
5950-00-904-1820	19	27
5905-00-904-5390	19	5
5905-00-904-5390	20	31
5910-00-905-7706	19	3
5910-00-905-7706	20	19
5955-00-908-8636	22	12
5910-00-911-5906	15	11
5961-00-911-6015	8	55
5961-00-911-6015	15	23
5905-00-912-2815	8	39
5965-00-912-2815	9	1
5905-00-912-2815	10	7
5905-00-912-2815	19	13
5965-00-912-2815	28	3
5905-00-914-2088	11	26
5905-00-914-2088	20	11
5905-00-914-2088	28	18
5905-00-914-2089	10	18
5905-00-914-2090	8	51
5905-00-914-2090	9	64
5905-00-914-2151	9	32
5905-00-914-2151	20	17
5905-00-914-4054	11	16
5905-00-914-4054	28	36
5905-00-915-0979	15	31
5905-00-915-0979	20	14
5905-00-915-0981	8	41A
5905-00-915-0981	15	6
5905-00-915-0983	10	37
5905-00-917-5523	8	49

STOCK NUMBER	FIGURE NO.	ITEM NO.
5905-00-917-5523	12	12
5905-00-917-5523	16	12
5905-00-917-5524	9	46
5905-00-917-5524	19	17
5905-00-917-5524	28	33
5905-00-917-5525	19	17
5905-00-917-5525	28	8
5905-00-917-5526	19	14
5905-00-919-0483	8	30
5905-00-922-7215	8	11
5905-00-922-7215	9	12
5905-00-922-7215	19	29
5905-00-922-7215	20	32
5905-00-922-7215	28	29
5905-00-922-7216	8	25
5905-00-922-7216	9	15
5905-00-922-7216	10	17
5905-00-922-7216	19	17
5905-00-922-7216	19	26
5905-00-922-7216	20	30
5905-00-922-7218	25	11
5905-00-923-3534	8	8
5905-00-923-3534	9	29
5905-00-923-3534	11	30
5905-00-923-3534	19	11
5905-00-923-3534	20	12
5905-00-923-3534	28	24
5905-00-923-3535	8	52
5905-00-923-3535	10	34
5905-00-924-3281	9	65
5905-00-924-3317	10	16
5961-00-925-3777	26	18
5961-00-925-3777	28	27
5905-00-925-8762	19	10
5905-00-925-8763	10	35
5821-00-926-3303	18	1
5961-00-926-7294	8	1
5961-00-926-7294	19	9
5961-00-926-7294	20	15
5905-00-926-8453	9	10
5305-00-927-2062	3	98
5310-00-928-2690	3	70
5310-00-928-2690	7	13
5310-00-928-2690	12	2
5310-00-928-2690	16	2
5310-00-928-2690	17	2
5310-00-928-2690	18	6
5310-00-928-2690	23	4
5310-00-928-2690	26	36
5310-00-928-2690	27	2
5310-00-929-6395	1	32
5310-00-929-6395	3	37
5310-00-929-6395	18	20
5945-00-929-9969	23	21
5905-00-931-0744	30	23
5905-00-931-0745	9	53
5905-00-931-4126	9	66
5961-00-932-4026	13	22
5310-00-933-8118	1	14
5310-00-933-8118	1	36
5310-00-933-8118	3	4
5310-00-933-8118	3	74
5310-00-934-9748	3	44
5910-00-936-0530	15	29
5910-00-936-0530	28	11
5961-00-938-1135	21	11
5305-00-939-0493	2	12
5310-00-939-0676	3	9
5310-00-939-1061	26	46
5905-00-939-1360	9	56
5905-00-939-3902	8	40
5905-00-940-2667	8	42
5905-00-940-2667	9	3
5905-00-940-2667	10	5
5905-00-940-2668	9	33
5905-00-940-2668	19	17
5905-00-942-3023	28	30
5905-00-942-3744	10	19
5905-00-943-9097	9	54
5905-00-945-5291	9	62

STOCK NUMBER	FIGURE NO.	ITEM NO.
5905-00-945-5291	28	16
5905-00-945-6957	9	18
5905-00-945-6957	10	27
5905-00-945-6957	19	19
5905-00-946-6352	19	31
5905-00-946-6352	28	2
5950-00-946-7781	22	2
5905-00-946-9102	8	45
5905-00-946-9102	9	58
5905-00-946-9102	11	1
5905-00-946-9103	10	36
5905-00-947-5522	9	59
5905-00-947-5522	13	21
5905-00-947-5522	19	35
5905-00-947-6216	9	63
5905-00-947-7759	8	3
5905-00-947-7759	28	14
5905-00-947-7838	20	16
5905-00-947-7840	8	26
5905-00-947-7840	19	23
5905-00-948-2393	13	19
5905-00-948-2393	19	8
5905-00-948-2393	28	20
5905-00-948-2596	28	42
5905-00-948-7266	15	19
5905-00-948-8451	9	52
5905-00-951-4682	12	15
5905-00-951-4682	16	15
5905-00-951-4682	19	17
5905-00-951-4682	19	32
5905-00-951-4682	28	32
5905-00-951-7021	30	10
5961-00-951-8757	26	7
5970-00-952-1231	27	6
5905-00-952-5156	8	41A
5905-00-952-5156	15	36
5905-00-952-5156	28	31
5905-00-957-2008	9	67
5950-00-961-9599	20	25
5305-00-964-7369	2	3
5905-00-965-5561	11	18
5905-00-965-9085	11	24
5905-00-967-4676	8	50
5965-00-972-3596	5	4
5905-00-975-1656	5	5
5910-00-975-2947	8	56
5910-00-977-5531	31	18
5905-00-981-1433	28	25
5950-00-981-5782	10	1
5905-00-982-0196	5	3
5905-00-985-5607	11	22
5340-00-988-9520	3	47
5961-01-003-0584	26	41
5910-01-006-6874	9	8
5950-01-007-6574	14	24
5910-01-007-8766	8	35
5910-01-007-8766	9	2
5905-01-008-0396	15	38
5905-01-015-9938	26	28
5961-01-019-6290	8	5
5961-01-019-6290	10	2
5961-01-024-2144	28	6
5910-01-026-4802	8	61
5910-01-026-4802	9	72
5910-01-026-4802	10	47
5910-01-026-4802	15	43
5910-01-026-4802	20	23
5905-01-027-1315	26	28
5910-01-031-8025	20	24
5910-01-031-8031	8	60
5910-01-031-8031	9	35
5910-01-031-8031	10	48
5910-01-031-8031	15	42
5910-01-031-8031	19	40
5910-01-031-8031	20	39
5910-01-031-8031	22	16
5910-01-031-8040	9	73
5910-01-031-8043	19	24
5910-01-031-8046	21	12
5910-01-031-8059	8	7
5910-01-031-8059	9	47
5905-01-035-5065	8	41A
5905-01-035-5065	10	14
5905-01-035-5065	11	28
5905-01-035-5065	12	27
5905-01-035-5065	15	10
5905-01-035-5065	16	27
5905-01-035-5065	26	15
5910-01-035-8085	9	8
5905-01-044-1504	10	28
5905-01-057-0862	26	28
5821-01-057-6266	1	5
5821-01-057-6411	3	77
5821-01-057-6412	7	1
5821-01-057-6413	7	8
5821-01-057-6414	23	2
5821-01-057-6415	7	4
5821-01-057-6416	7	9
5821-01-058-0959	1	10
5961-01-058-7785	8	54
5961-01-058-7785	15	24
5961-01-058-7786	21	8
5905-01-059-0546	26	28
5961-01-059-6780	30	4
5905-01-060-6626	15	41
5910-01-060-6627	15	16
5910-01-060-6627	15	37
5910-01-060-6628	25	5
5930-01-060-6636	3	86
5821-01-060-6694	7	11
5995-01-060-6735	17	28
5995-01-060-6736	17	29
5821-01-064-7218	1	9
5305-01-077-6281	1	17
5305-01-077-6282	1	19
5910-01-077-8326	20	9
5910-01-077-8327	31	3
5970-01-077-8328	30	25
5910-01-077-8329	20	9
5970-01-077-8330	31	24
5821-01-077-8332	1	2
5821-01-077-8333	3	90
5935-01-077-8334	17	46
5910-01-077-8335	20	9
5915-01-077-8461	12	9
5915-01-077-8462	16	9
5821-01-077-8483	18	8
5310-01-077-8489	1	33
5315-01-077-8491	3	60
5305-01-077-8514	29	3
5305-01-077-8515	3	78
5961-01-077-8570	15	35
5961-01-077-8571	31	14
5821-01-077-8599	7	7
5999-01-077-8602	14	4

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
BY2218	18911	3	55
CC4303M	18324	9	70
CC4305	18324	9	20
CC4307M	18324	9	16
CC4308M	18324	9	23
CK05BX473M	81349	8	49A
CK06BX474M	81349	8	44
CK16M223M	86335	21	4
CK60AW102M	81349	23	17
CK60BX101M	81349	23	16
CM05ED270J03	81349	12	19
CM05EU270J03	81349	16	19
CM05FD121J03	81349	12	26
CM05FD121J03	81349	16	26

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
CM7152AS15	71744	2	4
CODI4322	16352	21	9
CR83U	81349	22	13
CSR13F685MM	81349	28	12
CSR13G105MM	81349	3	27
CSR13G105MM	81349	9	12A
CSR13G105MM	81349	10	42
CSR13G105MM	81349	11	13
CS13BE225M	81349	15	26
CV35A090	81349	13	26
CY07G681G	86684	9	42
DM101	14299	15	8
DR-10,000	08289	27	6
EL50RC334M	24759	14	24
EL50RC474M	20932	15	27
FCJ157D	20932	15	34
FCJ157D	73899	30	7
FLA305C102M	73899	31	6
G6901-000-801	96095	17	37
G6902-000-801	94375	23	10
G6937-000-000	94375	29	8
G6937-000-000	94375	23	9
HPA8338	94375	24	6
HPA8338	28480	8	29
HPA8338	28480	9	30
H16V1A7005	28480	19	30
ITU1041-4	22490	26	25
ITU1042-20	09969	8	22
ITU1042-22	09969	10	11
ITU1043-3	09969	10	29
ITU1043-9	09969	10	21
ITU1143-2	09969	8	47
JAN1N3064	09969	25	9
JAN1N4148	07688	21	14
JAN1N4531	81349	21	11
JAN1N4531	81349	4	3
JAN1N4531	81349	6	1
JAN1N4531	81349	8	31
JAN1N4531	81349	9	6
JAN1N4531	81349	10	8
JAN1N4531	81349	11	21
JAN1N4531	81349	13	3
JAN1N4531	81349	14	6
JAN1N4531	81349	15	20
JAN1N4531	81349	19	25
JAN1N4531	81349	20	21
JAN1N4531	81349	26	11
JAN1N4532	81349	28	15
JAN1N4532	81349	8	10
JAN1N4532	81349	10	23
JAN1N5290	81349	20	10
JAN1N5298	81349	28	22
JAN1N746A	81349	28	6
JAN1N753A	81349	26	4
JAN2N2222A	81349	26	23
JAN2N2324A	81349	26	7
JAN2N2857	81349	26	22
JAN2N2857	81349	8	1
JAN2N2857	81349	19	9
JAN2N2907A	81349	20	15
JAN2N2907A	81349	26	18
JAN2N2919	81349	28	27
JAN2N3251A	81349	28	26
JAN2N3251A	81349	8	55
JAN2N3700	81349	15	23
JAN2N3792	81349	26	12
JP35	81349	1	7
J2A605	05397	28	5
J2P15	05397	26	40
J402A103J	05397	15	25
J05A100J	96095	15	37
J05A100K	04222	8	16
J05A101J	04222	21	12
J05A101J	04222	8	35
J05A101K	04222	9	2
J05A101K	04222	26	2
J05A120J	04222	28	19
J05A121J	04222	8	36
J05A121K	04222	8	38
	04222	15	18

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
ML105A150J	04222	20	24
ML105A150K	04222	13	27
ML105A151J	04222	9	39
ML105A180J	04222	8	6
ML105A180J	04222	20	6
ML105A220J	04222	8	14
ML105A220J	04222	9	61
ML105A220K	04222	13	1
ML105A240J	04222	8	41
ML105A240J	04222	9	49
ML105A241J	04222	8	24
ML105A270J	04222	8	57
ML105A300J	04222	8	34
ML105A300K	04222	19	24
ML105A330J	04222	8	37
ML105A331K	04222	12	24
ML105A360K	04222	16	24
ML105A391J	04222	19	39
ML105A470J	04222	11	9
ML105A471J	04222	8	9
ML105A560J	04222	9	37
ML105A561K	04222	8	12
ML105A680J	04222	14	34
ML105B102J	04222	8	15
ML105B102K	04222	9	60
ML105B102K	04222	8	43
ML105B102K	04222	21	7
ML105B102K	04222	22	8
ML105B102M	04222	28	37
ML105B102M	04222	13	15
ML105B102M	04222	14	32
ML105B202K	04222	20	1
ML105B222M	04222	9	13
ML105B302K	04222	13	11
ML105B322K	04222	28	10
ML105B332K	04222	11	8
ML105B620J	04222	14	1
ML105C103K	04222	8	58
ML105C103K	04222	15	29
ML105C103M	04222	28	11
ML105C103M	04222	8	27
ML105C103M	04222	9	69
ML105C103M	04222	11	14
ML105C103M	04222	12	14
ML105C103M	04222	13	7
ML105C103M	04222	14	14
ML105C103M	04222	16	14
ML105C103M	04222	17	38
ML105C472M	04222	20	38
MS1498	04222	13	32
MS15795-802	13327	19	21
MS15795-802	96906	7	14
MS15795-802	96906	17	13
MS15795-803	96906	27	3
MS15795-805	96906	3	21
MS16535-12	96906	1	42
MS16535-67	96906	24	3
MS16555-603	96906	17	40
MS16562-1	96906	3	84
MS16624-1025	96906	3	13
MS16624-5018-1	96906	3	39
MS16632-4018	96906	3	12
MS16995-11	96906	3	4
MS18130-8	96906	3	46
MS18214-11	96906	29	6
MS19060-17	96906	26	49
MS21042L02	96906	3	11
MS21042L02	96906	17	5
MS21042L02	96906	18	15
MS25036-48	96906	23	13
MS25036-52	96906	27	5
MS27183-2	96906	29	7
MS3212-17	96906	26	50
MS35206-321	96906	2	12
MS35333-104	96906	26	51
MS35333-69	96906	26	46
MS35338-70	96906	18	16
MS35338-134	96906	1	25
MS35338-134	96906	3	70
	96906	7	13

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
MS35338-134	96906	12	2
MS35338-134	96906	16	2
MS35338-134	96906	17	2
MS35338-134	96906	18	6
MS35338-134	96906	23	4
MS35338-134	96906	26	36
MS35338-134	96906	27	2
MS35338-134	96906	1	14
MS35338-135	96906	1	36
MS35338-135	96906	3	2
MS35338-135	96906	3	74
MS35338-135	96906	1	32
MS35338-136	96906	3	37
MS35338-136	96906	18	20
MS35338-136	96906	1	26
MS35431-3	96906	26	52
MS35431-3	96906	23	12
MS35489-4	96906	17	43
MS35649-224	96906	18	11
MS35649-224	96906	3	22
MS35649-244	96906	3	64
MS51923-187	96906	3	16
MS51957-1	96906	12	1
MS51957-1	96906	16	1
MS51957-1	96906	1	12
MS51957-128	96906	1	37
MS51957-13	96906	3	1
MS51957-13	96906	1	24
MS51957-14	96906	17	31
MS51957-14	96906	18	10
MS51957-2	96906	23	7
MS51957-2	96906	26	35
MS51957-2	96906	3	73
MS51957-22	96906	3	36
MS51957-26	96906	1	15
MS51957-268	96906	1	51
MS51957-276	96906	3	71
MS51957-3	96906	7	12
MS51957-3	96906	17	12
MS51957-3	96906	18	5
MS51957-3	96906	23	3
MS51957-3	96906	18	12
MS51957-4	96906	26	39
MS51957-4	96906	27	8
MS51957-4	96906	17	11
MS51957-5	96906	27	1
MS51957-5	96906	17	1
MS51957-6	96906	17	21
MS51957-7	96906	18	27
MS51957-9	96906	3	8
MS51959-15	96906	17	17
MS51959-3	96906	18	25
MS51959-3	96906	1	29
MS51959-4	96906	18	26
MS51959-4	96906	28	43
MS51959-6	96906	3	51
MS51963-1	96906	2	11
MS51963-34	96906	2	8
MS51963-37	96906	2	6
MS51963-9	96906	3	44
MS51963-9	81349	25	3
M22684-01-0033	81349	5	8
M22684-01-0071	81349	14	19
M26655-2-0086	81349	14	21
M26655-2-0174	81349	9	14
M26655/2-0094	81349	13	18
M26655/2-0094	81349	14	37
M26655/2-0094	81349	26	6
M26655/2-0094	81349	26	8
M26655/2-0146	81349	15	40
M38510/10101B6C	81349	26	32
M38510/10201B1A	81349	26	33
M38510/10702BXC	81349	15	32
M39003-02-0213	81349	11	15
M39003/01-3076	81349	26	30
M39003/01-3094	81349	28	41
M39003/01-3108	80205	3	28
NAS1035-00-6	80205	3	100
NAS1035-00-8	80205	3	98
NAS1035-02-16	80205	3	99
NAS1035-02-20			

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
NAS1640-0	80205	3	10
NAS662C0-2	80205	12	4
NAS662C0-2	80205	16	4
NAS662C2R2	80205	2	3
NAS671C0	80205	3	9
NAS671C8	80205	1	45
N11240-50	73957	3	47
PFSC3-1-2-38	72794	3	34
PG1025	01281	8	5
PG1025	01281	10	2
PRT9862	01281	30	13
RCR05G101JS	81349	9	14A
RCR05G101JS	81349	10	6
RCR05G101JS	81349	12	16
RCR05G101JS	81349	13	34
RCR05G101JS	81349	14	5
RCR05G101JS	81349	15	14
RCR05G101JS	81349	16	16
RCR05G101JS	81349	20	35
RCR05G102JS	81349	10	4
RCR05G102JS	81349	12	22
RCR05G102JS	81349	13	16
RCR05G102JS	81349	16	22
RCR05G102JS	81349	20	33
RCR05G102JS	81349	26	10
RCR05G102KS	81349	14	11
RCR05G103JS	81349	8	41A
RCR05G103JS	81349	10	14
RCR05G103JS	81349	11	28
RCR05G103JS	81349	12	27
RCR05G103JS	81349	15	10
RCR05G103JS	81349	16	27
RCR05G103JS	81349	26	15
RCR05G103JS	81349	14	33
RCR05G103KS	81349	14	18
RCR05G104KS	81349	14	31
RCR05G123JS	81349	9	45
RCR05G132JS	81349	15	30
RCR05G132JS	81349	13	34
RCR05G151JS	81349	14	22
RCR05G151JS	81349	13	31
RCR05G152JS	81349	26	24
RCR05G181JS	81349	14	36
RCR05G182JS	81349	22	14
RCR05G183KS	81349	14	3
RCR05G220JS	81349	26	3
RCR05G220JS	81349	26	31
RCR05G221JS	81349	14	26
RCR05G222JS	81349	11	11
RCR05G222JS	81349	13	9
RCR05G223JS	81349	14	27
RCR05G243JS	81349	14	40
RCR05G244JS	81349	10	32
RCR05G271JS	81349	13	37
RCR05G272JS	81349	12	11
RCR05G272JS	81349	13	6
RCR05G272JS	81349	16	11
RCR05G272KS	81349	14	16
RCR05G302JS	81349	9	43
RCR05G302JS	81349	19	17
RCR05G302JS	81349	28	34
RCR05G303JS	81349	10	38
RCR05G303JS	81349	11	10
RCR05G332JS	81349	14	13
RCR05G392JS	81349	15	39
RCR05G432JS	81349	14	7
RCR05G471JS	81349	12	25
RCR05G471JS	81349	13	13
RCR05G471JS	81349	14	25
RCR05G471JS	81349	16	25
RCR05G471JS	81349	22	11
RCR05G471JS	81349	14	20
RCR05G512JS	81349	26	16
RCR05G561JS	81349	14	30
RCR05G562JS	81349	14	2
RCR05G563JS	81349	9	31
RCR05G621JS	81349	28	9
RCR05G621JS	81349	9	24
RCR05G622JS	81349	12	28
RCR05G680JS			

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
RCR05G680JS	81349	13	34
RCR05G680JS	81349	16	28
RCR05G681JS	81349	12	31
RCR05G681JS	81349	13	33
RCR05G681JS	81349	16	31
RCR05G682JS	81349	10	31
RCR05G682JS	81349	14	28
RCR05G683JS	81349	14	17
RCR05G750JS	81349	14	39
RCR05G751JS	81349	8	36
RCR05G753JS	81349	10	33
RCR05G753JS	81349	15	9
RCR05G820JS	81349	13	28
RCR05G823JS	81349	8	48
RCR07G102JS	81349	26	17
RCR07G152KS	81349	14	12
RCR07G332JS	81349	26	20
RCR07G4R7JS	81349	31	12
RCR07G471JS	81349	30	8
RCR07G511JS	81349	10	15
RCR07G511JS	81349	19	36
RCR07G511JS	81349	20	27
RCR07G910JS	81349	14	23
RCR20G821JS	81349	26	26
RC05GF100J	81349	9	32
RC05GF100J	81349	20	17
RC05GF101J	81349	28	42
RC05GF102J	81349	8	8
RC05GF102J	81349	9	29
RC05GF102J	81349	11	30
RC05GF102J	81349	19	11
RC05GF102J	81349	20	12
RC05GF102J	81349	28	24
RC05GF103J	81349	8	11
RC05GF103J	81349	9	12
RC05GF103J	81349	19	29
RC05GF103J	81349	20	32
RC05GF103J	81349	28	29
RC05GF104K	81349	13	5
RC05GF104K	81349	15	13
RC05GF122J	81349	9	65
RC05GF122K	81349	13	12
RC05GF123J	81349	8	41A
RC05GF123J	81349	9	44
RC05GF123J	81349	11	7
RC05GF124J	81349	8	52
RC05GF124J	81349	10	34
RC05GF150J	81349	30	23
RC05GF151J	81349	8	45
RC05GF151J	81349	9	58
RC05GF151J	81349	11	1
RC05GF152J	81349	10	16
RC05GF153J	81349	8	39
RC05GF153J	81349	9	1
RC05GF153J	81349	10	7
RC05GF153J	81349	19	13
RC05GF153J	81349	28	3
RC05GF153K	81349	8	41A
RC05GF153K	81349	11	27
RC05GF153K	81349	13	29
RC05GF153K	81349	15	12
RC05GF154J	81349	10	36
RC05GF154K	81349	10	25
RC05GF160J	81349	8	18
RC05GF163J	81349	15	31
RC05GF163J	81349	20	14
RC05GF182J	81349	8	49
RC05GF182J	81349	12	12
RC05GF182J	81349	16	12
RC05GF183J	81349	8	41A
RC05GF183K	81349	20	34
RC05GF201J	81349	9	54
RC05GF202J	81349	9	46
RC05GF202J	81349	19	17
RC05GF202J	81349	28	33
RC05GF203J	81349	9	56
RC05GF203J	81349	13	21
RC05GF203J	81349	19	35
RC05GF220J	81349	19	10
RC05GF220K	81349	12	30
RC05GF220K	81349	16	30
RC05GF221J	81349	8	2
RC05GF221J	81349	9	68
RC05GF221K	81349	13	34
RC05GF221K	81349	20	7
RC05GF222J	81349	9	18
RC05GF222J	81349	10	27
RC05GF222J	81349	19	19
RC05GF223J	81349	8	42
RC05GF223J	81349	9	3
RC05GF223J	81349	10	5
RC05GF223K	81349	8	41A
RC05GF223K	81349	13	20
RC05GF241J	81349	28	25
RC05GF242J	81349	12	15
RC05GF242J	81349	16	15
RC05GF242J	81349	19	17
RC05GF242J	81349	19	32
RC05GF242J	81349	28	32
RC05GF243J	81349	11	16
RC05GF243J	81349	28	36
RC05GF270J	81349	9	63
RC05GF271J	81349	9	53
RC05GF272J	81349	9	33
RC05GF272J	81349	19	17
RC05GF273J	81349	8	41A
RC05GF273J	81349	15	36
RC05GF273J	81349	28	31
RC05GF273K	81349	13	24
RC05GF301J	81349	9	66
RC05GF330K	81349	13	34
RC05GF331J	81349	8	26
RC05GF331J	81349	19	23
RC05GF331K	81349	12	29
RC05GF331K	81349	16	29
RC05GF331K	81349	20	3
RC05GF332J	81349	8	25
RC05GF332J	81349	9	15
RC05GF332J	81349	10	17
RC05GF332J	81349	19	17
RC05GF332J	81349	19	26
RC05GF332J	81349	20	30
RC05GF332K	81349	13	17
RC05GF332K	81349	15	5
RC05GF333J	81349	16	17
RC05GF333K	81349	8	50
RC05GF333K	81349	8	41A
RC05GF333K	81349	10	24
RC05GF334J	81349	13	4
RC05GF362J	81349	10	35
RC05GF362J	81349	19	17
RC05GF390J	81349	28	8
RC05GF391J	81349	8	40
RC05GF391K	81349	9	10
RC05GF391K	81349	13	35
RC05GF392J	81349	15	17
RC05GF393J	81349	25	11
RC05GF393J	81349	8	41A
RC05GF432J	81349	15	6
RC05GF432J	81349	13	19
RC05GF432J	81349	19	8
RC05GF470J	81349	28	20
RC05GF470K	81349	9	30
RC05GF470K	81349	13	36
RC05GF470K	81349	15	44
RC05GF471J	81349	20	29
RC05GF471J	81349	22	3
RC05GF472J	81349	8	53
RC05GF472J	81349	19	28
RC05GF472J	81349	8	4
RC05GF472K	81349	9	5
RC05GF473J	81349	28	7
RC05GF473J	81349	15	21
RC05GF473K	81349	22	6
RC05GF473K	81349	19	5
RC05GF510J	81349	20	31
RC05GF510J	81349	8	41A
	81349	10	43
	81349	8	3
	81349	28	14

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
RC05GF511J	81349	9	52
RC05GF512J	81349	11	26
RC05GF512J	81349	20	11
RC05GF512J	81349	28	18
RC05GF514J	81349	26	30
RC05GF560J	81349	9	67
RC05GF561J	81349	8	51
RC05GF561J	81349	9	64
RC05GF562J	81349	10	18
RC05GF562K	81349	12	20
RC05GF562K	81349	16	20
RC05GF563J	81349	15	19
RC05GF620J	81349	8	19
RC05GF623J	81349	10	37
RC05GF680J	81349	8	30
RC05GF681J	81349	9	62
RC05GF681J	81349	28	16
RC05GF682J	81349	8	46
RC05GF682J	81349	9	7
RC05GF682J	81349	11	17
RC05GF682J	81349	28	23
RC05GF683K	81349	13	14
RC05GF683K	81349	15	15
RC05GF750J	81349	19	16
RC05GF750J	81349	30	22
RC05GF752G	81349	10	39
RC05GF752J	81349	19	31
RC05GF752J	81349	28	2
RC05GF820J	81349	9	56
RC05GF821K	81349	10	28
RC05GF822J	81349	10	19
RC05GF822K	81349	9	34
RC05GF822K	81349	22	4
RC05GF911J	81349	20	16
RC05GF912J	81349	19	14
RC07GF100K	81349	21	1
RC07GF101J	81349	30	11
RC07GF102K	81349	11	19
RC07GF103J	81349	30	2
RC07GF103K	81349	4	2
RC07GF103K	81349	6	2
RC07GF122J	81349	15	33
RC07GF133J	81349	9	19
RC07GF152J	81349	11	4
RC07GF153K	81349	21	3
RC07GF201J	81349	28	26
RC07GF201J	81349	30	3
RC07GF222J	81349	9	38
RC07GF302J	81349	21	2
RC07GF303K	81349	21	5
RC07GF331K	81349	21	6
RC07GF332K	81349	23	18
RC07GF431J	81349	30	19
RC07GF432J	81349	31	4
RC07GF470J	81349	31	23
RC07GF472K	81349	21	15
RC07GF473J	81349	9	40
RC07GF510J	81349	30	9
RC07GF750J	81349	10	13
RC20GF102J	81349	10	41
RC20GF332F	81349	12	17
RER40F15R0M	81349	26	34
RLA305A100J	98095	25	6
RLR05C102GM	81349	15	38
RLR05C1102GR	81349	15	1
RLR05C1202GR	81349	15	2
RLR05C2702GR	81349	11	3
RLR05C680JM	81349	3	29
RLR07C751GR	81349	25	7
RNC50H1470FS	81349	6	5
RNC50H1620FS	81349	6	10
RNC50H1780FS	81349	6	4
RNC55H2211FS	81349	5	7
RNC55H2261FS	81349	5	2
RNR55C10R0FS	81349	26	40
RNR55C1000FS	81349	26	28
RNR55C1100FS	81349	26	26
RNR55C1210FS	81349	26	28
RNR55C1300FS	81349	26	28
RNR55C1400FS	81349	26	28
RNR55C1500FM	81349	26	28
RNR55C1620FM	81349	26	28
RNR55C1690FS	81349	26	28
RNR55C1820FS	81349	26	28
RNR55C1910FS	81349	26	28
RNR55C2000FS	81349	26	28
RNR55C2431FM	81349	26	29
RNR55C2671FS	81349	26	1
RNR55C30R1FM	81349	26	28
RNR55C40R2FS	81349	26	28
RNR55C49R9FS	81349	26	28
RNR55C60R4FS	81349	26	28
RNR55C69R8FS	81349	26	28
RNR55C80R6FS	81349	26	28
RNR55C90R9FM	81349	26	28
RN50C1430F	81349	6	6
RN50C1540F	81349	6	8
RN50C1580F	81349	6	9
RN50C1690F	81349	6	11
RN50C1740F	81349	6	12
RN50C1870F	81349	6	3
RN55C2551F	81349	5	6
RN55C2601F	81349	5	5
RN55C5621F	81349	5	3
RN55C9311F	81349	5	4
RN55D1102F	81349	11	18
RN55D1500F	81349	11	22
RN55D7500F	81349	11	20
RN55D9090F	81349	11	23
RN55D9091F	81349	11	24
RTR24UL502K	81349	3	23
RWR80S6800FM	81349	26	14
RWR81S3900FM	81349	26	27
SC62815LH	04713	10	40
SM-A-595775-159	80063	20	9
SM-A-595775-229	80063	20	9
SM-A-595775-279	80063	20	9
SM-A-595827-6	80063	8	45A
SM-A-595874-2	80063	12	9
SM-A-595874-4	80063	16	9
SM-A-618652-2	80063	10	12
SM-A-618670-1	80063	31	3
SM-A-618677-1	80063	31	14
SM-A-726661	80063	21	8
SM-A-726664	80063	8	54
SM-A-726664	80063	15	24
SM-A-882568	80063	15	35
SM-A-882569	80063	31	22
SM-B-595940-2	80063	3	60
SM-B-618008	80063	3	7
SM-B-693147-5	80063	29	3
SM-B-882571	80063	1	2
SM-B-882571-5	80063	3	78
SM-B-882572-2	80063	1	17
SM-B-882572-3	80063	1	19
SM-B-882652	80063	1	33
SM-B-882659	80063	7	7
SM-B-882666	80063	1	6
SM-C-882345	80063	17	25
SM-C-882639	80063	18	8
SM-D-618086	80063	3	90
SM-D-693672	80063	31	24
SM-D-882566	80063	30	25
SM-D-882661	80063	14	4
SMA595775-109	80063	19	3
SMA595775-109	80063	20	19
SMA595775-829	80063	8	7
SMA595775-829	80063	9	47
SMA595799-69	80063	25	5
SMA595807-2	80063	17	33
SMA595820-1	80063	25	2
SMA595833-12	80063	19	6
SMA595873-12	80063	9	41
SMA595889-2	80063	28	21
SMA595910-10	80063	19	20
SMA595910-11	80063	20	18
SMA595910-12	80063	20	5
SMA595910-6	80063	19	37
SMA595910-7	80063	19	7

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
SMA595910-8	80063	19	33
SMA595910-9	80063	19	15
SMA595911-115	80063	8	13
SMA595911-14	80063	24	2
SMA595911-15	80063	24	4
SMA595911-33	80063	31	11
SMA595911-34	80063	30	20
SMA595911-35	80063	30	18
SMA595911-35	80063	31	9
SMA595911-36	80063	30	21
SMA595911-36	80063	31	1
SMA595911-37	80063	30	16
SMA595911-38	80063	30	6
SMA595911-38	80063	31	16
SMA595911-39	80063	31	7
SMA595911-40	80063	30	14
SMA595911-51	80063	20	8
SMA595911-70	80063	31	21
SMA595911-71	80063	31	19
SMA595911-72	80063	31	20
SMA595911-75	80063	31	21
SMA595911-76	80063	31	19
SMA595911-77	80063	31	20
SMA597813-5	80063	3	33
SMA597837-1	80063	1	52
SMA597837-1	80063	17	32
SMA597837-2	80063	18	23
SMA597837-2	80063	17	18
SMA617902-3	80063	18	22
SMA617905-1	80063	17	4
SMA617936-1	80063	23	21
SMA617936-1	80063	19	38
SMA693009-103	80063	20	22
SMA726655	80063	15	16
SMA726655	80063	9	4
SMA726655	80063	10	10
SMA726655	80063	11	4
SMA726655	80063	12	13
SMA726655	80063	13	25
SMA726655	80063	14	4
SMA726655	80063	15	7
SMA726655	80063	16	13
SMA726655	80063	19	12
SMA726655	80063	20	13
SMA726655	80063	21	10
SMA726658	80063	28	13
SMA726658	80063	9	11
SMA726658	80063	10	44
SMA726658	80063	13	8
SMA726658	80063	14	4A
SMA726658	80063	15	22
SMA726658	80063	19	34
SMA726658	80063	20	26
SMA726663	80063	28	4
SMA82655	80063	30	4
SMA82655	80063	11	31
SMA82655	80063	13	38
SMA82655	80063	14	41
SMA82674	80063	15	42A
SMA82675	80063	26	44
SMA82676	80063	26	21
SMA82683	80063	26	19
SMA595946-1	80063	26	45
SMA595946-10	80063	22	17
SMA595971-1	80063	17	3
SMA596140	80063	3	19
SMA596143	80063	18	4
SMA596347	80063	18	3
SMA597932-4	80063	7	5
SMA605913	80063	3	88
SMA605936	80063	7	1
SMA605942	80063	1	9
SMA605947	80063	49	1
SMA605972	80063	23	2
SMA605978	80063	7	8
SMA617883	80063	3	77
SMA617939-3	80063	3	96
SMA618080-1	80063	3	17
SMA618080-2	80063	3	49
SMB618080-4	80063	3	66
SMB618116	80063	3	45
SMB618122	80063	3	72
SMB618201	80063	3	68
SMB618203	80063	17	15
SMB618208	80063	17	30
SMB618293	80063	1	11
SMB618297	80063	23	1
SMB618312	80063	18	1
SMB618313	80063	24	7
SMB618392	80063	24	11
SMB618398	80063	3	97
SMB618442	80063	3	6
SMB618442	80063	1	31
SMB618840	80063	18	21
SMB632012	80063	1	28
SMB632242	80063	18	2
SMB632244	80063	1	35
SMB632271	80063	29	9
SMB658109	80063	29	2
SMB658115	80063	7	9
SMB658197	80063	7	4
SMB658198	80063	3	24
SMB692768	80063	3	25
SMB692772	80063	20	36
SMB692882	80063	1	30
SMB692902	80063	7	6
SMB692955	80063	25	10
SMB692971	80063	3	50
SMB693079	80063	3	75
SMB693081	80063	7	2
SMB693141	80063	7	3
SMB693146	80063	3	38
SMB693147	80063	3	15
SMB693159-1	80063	1	10
SMB693160	80063	3	3
SMB693162	80063	1	3
SMB693245	80063	7	10
SMB882580	80063	1	5
SMB882640	80063	1	1
SMB882678	80063	1	4
SMB882680	80063	26	42
SMB882681	80063	26	54
SMB882684	80063	26	55
SMB882687	80063	26	38
SMC596013-10	80063	26	43
SMC596085-5	80063	1	34
SMC596085-5	80063	26	53
SMC596065-6	80063	27	9
SMC596095-12	80063	27	4
SMC596378-16	80063	3	76
SMC596378-16	80063	12	6
SMC596378-18	80063	16	6
SMC596378-2	80063	17	22
SMC596378-20	80063	3	52
SMC597677	80063	17	41
SMC597739	80063	3	31
SMC617832-2	80063	1	41
SMC617837-1	80063	3	67
SMC617837-12	80063	3	5
SMC617837-3	80063	17	42
SMC617837-3	80063	3	69
SMC617837-3	80063	18	7
SMC617837-5	80063	23	5
SMC617837-7	80063	1	13
SMC617837-8	80063	17	10
SMC617878-2	80063	1	18
SMC617878-3	80063	3	92
SMC618046-1	80063	3	91
SMC618048-3	80063	3	42
SMC618053-1	80063	3	41
SMC618053-4	80063	3	40
SMC618063	80063	3	35
SMC618064	80063	3	65
SMC618066-2	80063	3	48
SMC618066-3	80063	3	56
SMC618089	80063	3	54
SMC618094	80063	3	43
SMC618213	80063	17	14
SMC618270	80063	23	6
	80063	12	8

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
SMC618270	80063	16	8
SMC618271	80063	12	3
SMC618271	80063	16	3
SMC618272	80063	12	7
SMC618272	80063	16	7
SMC618273	80063	12	5
SMC618273	80063	16	5
SMC618423-2	80063	1	27
SMC618436	80063	18	18
SMC618439	80063	18	24
SMC618549	80063	3	61
SMC618550	80063	3	59
SMC618887	80063	17	36
SMC618888	80063	17	39
SMC632171	80063	10	45
SMC632174	80063	17	34
SMC632302	80063	23	11
SMC632311	80063	1	48
SMC632342	80063	1	22
SMC632343	80063	3	80
SMC632344	80063	3	83
SMC658097	80063	17	29
SMC658199	80063	2	5
SMC658216-1	80063	7	16
SMC658216-4	80063	7	17
SMC658216-5	80063	7	15
SMC692567	80063	1	40
SMC692614	80063	1	46
SMC692615	80063	1	49
SMC692753	80063	17	16
SMC692965	80063	3	18
SMC692966-1	80063	3	14
SMC693149	80063	2	7
SMC726675	80063	2	18
SMC726679	80063	2	15
SMCd82576	80063	3	58
SMCd82582	80063	2	17
SMCd82583	80063	2	16
SMCd82584	80063	2	14
SMCd82585	80063	2	9
SMCd82638	80063	18	9
SMCd82688	80063	26	37
SMD595976-2	80063	3	55
SMD595979-3	80063	2	10
SMD617842-1	80063	3	93
SMD617842-2	80063	3	94
SMD617888-1	80063	3	57
SMD617888-2	80063	3	53
SMD618082	80063	3	63
SMD618087	80063	3	89
SMD618269	80063	17	44
SMD618286	80063	17	19
SMD658095	80063	17	28
SMDd82587	80063	2	1
SMDd82588	80063	2	2
SMDd82589	80063	2	13
SME692575	80063	1	50
SME693167	80063	7	11
SPS6968M	04713	9	36
SPS6968M	04713	22	10
SS3745	04713	28	40
SS3747	04713	10	30
SY15-1045100	84411	11	25
SY15-1835100	84411	11	5
SY15-2232100	84411	15	3
SY15-2432100	84411	15	4
SZA41	13327	9	48
SZA41	13327	28	38
S8424J	18324	9	17
S8826J	18324	9	22
TA2402A	08289	26	48
TA2402A	08289	27	7
T330C106K025AS	05397	15	11
ULA105A101K	96095	8	61
ULA105A101K	96095	9	72
ULA105A101K	96095	10	47
ULA105A101K	96095	15	43
ULA105A101K	96095	20	23
ULA105A680J	96095	9	73
ULA105C102M	04222	8	60
ULA105C102M	04222	9	35
ULA105C102M	04222	10	48
ULA105C102M	04222	15	42
ULA105C102M	04222	19	40
ULA105C102M	04222	20	39
ULA105C102M	04222	22	16
ULA505C102KM	96095	25	12
ULA505C104KM	96095	9	21
ULA505C104KM	96095	10	22
ULA505C104KM	96095	13	23
ULA505C104KM	96905	14	29
UY01180F	73899	24	8
UY01220F	73899	24	9
UY01270F	73899	24	1
UY01300F	73899	24	5
UY014R7C	73899	24	10
UY02100F	73899	31	5
UY02100G	73899	30	15
UY02220G	73899	31	18
UY02330G	73899	31	8
UY02470G	73899	30	17
UY02470G	73899	31	10
UY03150F	73899	30	24
UY03150F	73899	31	13
UY12103Z	73899	30	5
UY12103Z	73899	31	17
UY12332M	73899	30	12
013-2041	98291	3	26
09-4416-1K	06540	19	1
1-8JNA	95987	17	9
1-8JNA	95987	23	8
1N4003	04713	23	15
1N4736A	80131	13	22
1N4741	80131	11	29
1N4920A	80131	28	39
1025-08	99800	22	9
1025-12	99800	12	23
1025-12	99800	16	23
1025-20	99800	19	16
1025-20	99800	20	37
1025-20	99800	28	17
1025-28	99800	20	25
1025-32	99800	25	4
1025-38	99800	19	27
1025-44	99800	9	57
1025-44	99800	12	18
1025-44	99800	13	10
1025-44	99800	14	35
1025-44	99800	16	18
1025-48	99800	22	2
1025-52	99800	9	55
1025-52	99800	13	30
1025-52	99800	14	8
1025-56	99800	10	1
1526-2	91833	26	13
1782-28	99800	12	21
1782-28	99800	16	21
1782-40	99800	8	55A
1782-40	99800	9	51
2N4912	04713	1	8
2N5679	04713	26	41
2N6049	04713	26	47
2003A4	88245	30	1
2003A4	88245	31	2
2031A4	88245	11	6
2031A4	88245	12	10
2031A4	88245	13	2
2031A4	88245	16	10
203184	88245	4	1
203184	88245	5	1
203184	88245	6	7
203184	88245	9	9

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
203184	88245	10	3
203184	88245	19	2
203184	88245	20	20
203184	88245	22	1
203184	88245	25	1
203184	88245	26	9
205-10-2K	88245	28	1
206484	84048	11	12
206484	88245	8	33
21-249218-32P	88245	21	13
220-834-04	77820	1	47
220-844-02	02660	17	7
220-844-02	02660	17	6
220-845-02	02660	18	14
220-845-02	02660	1	20
220-845-02	02660	3	79
220-871-02	02660	17	24
223-1109	02660	17	27
223-1133	29587	17	23
223-1209	02660	3	82
223-1233	29587	18	13
223-1233	02660	3	81
223-697	02660	17	26
223-698	02660	1	21
2302	29587	17	8
240E1225	28480	26	5
2404-007X5T0152M	56289	30	10
2404-007X5T0152M	15450	18	19
259-20-30-233	72982	29	5
273005	71785	17	35
282001-2	75915	1	43
282002LESSCAP	75915	1	44
294662	75915	1	38
3-16JNA	76530	9	27
30YY2069	95987	1	23
300-2K	81073	3	20
310-1K	84048	28	35
3170173	84048	5	9
318-0224-01	06978	15	28
318-0224-01	06978	8	28
318-0224-01	06978	19	22
318-228-02	06978	20	4
318-230-02	06978	22	5
341	06978	8	32
341	79963	18	17
418-135-22	79963	23	20
418-135-24	06978	8	17
418-136-04	06978	9	28
500-2081-7	06978	14	10
500-2099	93292	20	26
5204-4012	93292	8	23
5204-4012	91662	8	20
5204-4012	91662	9	26
5204-4112	91662	10	26
530-006	91662	17	46
530-006	72982	19	4
	72982	25	8

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
538-007-5-5-18PFA	15450	22	7
60-8240-0283-00070	91662	17	45
60-8240-0313-00070	91662	8	21
60-8240-0313-00070	91662	9	25
60-8240-0313-00070	91662	10	20
700-10-2K	74902	14	9
7016-3	95712	23	19
70202-1	82142	23	14
70202-1	82142	29	4
70202-1	82142	31	15
8J1141	81073	3	30
8YY33181-1	81073	3	32
8YY33181-2	81073	3	101
8YY33182	81073	3	85
8YY33400	81073	3	86
8YY34014	81073	3	87
8004-1G17	91506	22	12
803S	70528	10	9
8111A100R2G220J	72982	9	8
8111A100R2G220K	72982	9	8
8111A100R2G240J	72982	9	8
8111A100R2G270J	72982	9	8
8111A100R2G270K	72982	9	8
8111A100R2G300J	72982	9	8
8111A100R2G330J	72982	9	8
8111A100R2G330K	72982	9	8
8111A100R2G360J	72982	9	8
8111A100R2G390J	72982	9	8
8111A100R2G390K	72982	9	8
8111A100T2H220K	72982	9	8
8111A100T2H240J	72982	9	8
8111A100T2H270J	72982	9	8
8111A100T2H270K	72982	9	8
8111A100T2H300J	72982	9	8
8111A100T2H330J	72982	9	8
8111A100T2H330K	72982	9	8
8111A100T2H360J	72982	9	8
8111A100T2H390J	72982	9	8
8111A100T2H390K	72982	9	8
8111A100U2J220K	72982	9	8
8111A100U2J270K	72982	9	8
8111A100U2J330K	72982	9	8
8111A100U2J390K	72982	9	8
8111A200T2H0220G	18796	9	8
8121A100C0G220J	72982	9	8
8121A100C0G220K	72982	9	8
8121A100C0G240J	72982	9	8
8121A100C0G270J	72982	9	8
8121A100C0G300J	72982	9	8
8121A100C0G330J	72982	9	8
8121A100C0G330K	72982	9	8
8121A100C0G360J	72982	9	8
8121A100C0G390J	72982	9	8
8121A100C0G390K	72982	9	8
850-20	75042	15	41
86965A	86684	14	38
9000-40C	92114	3	62

LATEST PART NUMBER ASSIGNMENTS

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
CDR01BX332BKSM	81349	8	59
CDR01BX332BKSM	81349	9	71
CDR01BX332BKSM	81349	10	46
CDR01BX332BKSM	81349	14	15
CDR01BX332BKSM	81349	17	47

LATEST NATIONAL STOCK NUMBER ASSIGNMENT

STOCK NUMBER	FIG. NO.	ITEM NO.
5310-00-928-2690	28	44

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
CDR01BX332BKSM	81349	19	41
CDR01BX332BKSM	81349	20	40
CDR01BX332BKSM	81349	22	15
MS35338-134	96906	28	44
SMA595827-6	80063	20	2
SMA882685-1	80063	8	43A
SMC617837-3	80063	28	45
SMD882656	80063	2	3A
70485	70485	2	

ADDITIONAL LATEST PART NUMBER ASSIGNMENT

RC05GF151K	81349	13	36

☆ U.S. GOVERNMENT PRINTING OFFICE : 1990 - 261-872 (21125)

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

SOMETHING WRONG WITH THIS MANUAL?

THEN. . .JOT DOWN THE DOPE ABOUT IT ON THIS FORM, TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)
Commander
Stateside Army Depot
ATTN: AMSTA-US
Stateside, N.J. 07703

DATE: 10 July 1975

PUBLICATION NUMBER	DATE	TITLE
TM 11-5840-340-20P	23 Jan 78	Radar Set AN/PRC-76

BE EXACT. . .PIN-POINT WHERE IT IS

PAGE NO.	PARAGRAPH	FIGURE NO.	TABLE NO.
33			
44		19	
45			

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

For item 2, change the NSN to read: 5835-00-134-9186.
Reason: Accuracy.

Identify the cover on the junction box (item no. 5).
Reason: It is a separate item and is not called out on figure 19.

Add the cover of the junction box as an item in the listing for figure 19.
Reason: Same as above.

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER
SSG I. M. DeSpiritof 999-1776

SIGN HERE: SSG I. M. DeSpiritof

DA FORM 1 AUG 74 2028-2

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "PRONTO," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

TEAR ALONG DOTTED LINE

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

SOMETHING WRONG WITH THIS MANUAL?

THEN. . .JOT DOWN THE DOPE ABOUT IT ON THIS FORM, TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER	DATE	TITLE
TM 11-5821-260-34P-1	10 Mar 80	Radio Set AN/ARC-115A(V)1

BE EXACT. . .PIN-POINT WHERE IT IS

PAGE NO.	PARAGRAPH	FIGURE NO.	TABLE NO.

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

TEAR ALONG DOTTED LINE

DA FORM 1 AUG 74 2028-2

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commander
US Army Communications and
Electronics Materiel Readiness Command
ATTN: DRSEL-ME-MQ
Fort Monmouth, New Jersey 07703

TEAR ALONG DOTTED LINE

FOLD BACK

REVERSE OF DA FORM 2028-2

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

SOMETHING WRONG WITH THIS MANUAL?

THEN. . .JOT DOWN THE DOPE ABOUT IT ON THIS FORM, TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER	DATE	TITLE
TM 11-5821-260-34P-1	10 Mar 80	Radio Set AN/ARC-115A(V)1

BE EXACT. . .PIN-POINT WHERE IT IS

PAGE NO.	PARAGRAPH	FIGURE NO.	TABLE NO.

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 1 AUG 74 2028-2

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

TEAR ALONG DOTTED LINE

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commander
US Army Communications and
Electronics Materiel Readiness Command
ATTN: DRSEL-ME-MQ
Fort Monmouth, New Jersey 07703

TEAR ALONG DOTTED LINE

FOLD BACK

REVERSE OF DA FORM 2028-2

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

SOMETHING WRONG WITH THIS MANUAL?

THEN. . .JOT DOWN THE DOPE ABOUT IT ON THIS FORM, TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER	DATE	TITLE
TM 11-5821-260-34P-1	10 Mar 80	Radio Set AN/ARC-115A(V)1

BE EXACT. . .PIN-POINT WHERE IT IS

PAGE NO.	PARAGRAPH	FIGURE NO.	TABLE NO.

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 1 AUG 74 2028-2

P.S.—IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

TEAR ALONG DOTTED LINE

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commander
US Army Communications and
Electronics Materiel Readiness Command
ATTN: DRSEL-ME-MQ
Fort Monmouth, New Jersey 07703

TEAR ALONG DOTTED LINE

FOLD BACK

REVERSE OF DA FORM 2028-2

By Order of the Secretary of the Army:

E. C. MEYER
General, United States Army
Chief of Staff

Official:

J. C. PENNINGTON
Major General, United States Army
The Adjutant General

Distribution:

To be distributed in accordance with DA Form 12-36, Direct and General Support maintenance requirements for AN/ARC-115.